

Wireless LAN PCI Card

User Manual V1.0

USING THIS DOCUMENT

This document provides detailed user guidelines for Wireless LAN PCI Card operation and settings. Though every effort has been made to ensure that this document is up-to-date and accurate, more information may have become available subsequent to the production of this guide.

RELEASE HISTORY

Version	Author	Date	Note
1.0	Zucker	2007/12/6	First release

Content

Introduction	1
Specifications	2
Installation/ Uninstallation	3
Ralink Wireless Utility (RaUI) or Windows Zero Configuration (WZC)	8
Use WZC to configure wireless NIC	10
Start RaUI	17
Profile	24
Add/Edit Profile	28
Example to Add Profile in Profile	30
Network	34
Example on Adding Profile in Network	42
Advanced	46
Statistics	48
WMM	50
Example to Configure to Enable DLS (Direct Link Setup)	51
Example to Configure to Enable Wi-Fi Multi-Media	57
Example to Configure to Enable WMM Power Save	59
WPS	60
WPS Information on AP	63
Example to Add to Registrar Using PIN Method	65
Example to Add to Registrar Using PBC Method	71
Example to Configure a Network/AP Using PIN or PBC Method	76
Link Status	79
Auth. \ Encry. Setting - WEP/TKIP/AES	81
802.1x Setting	82
Example to Reconnect 802.1x Authenticated Connection after 802.1x	
Authenticated connection Is Failed in Profile	85
Example to Configure Connection with WEP on	90
Example to Configure Connection with WPA-PSK	94
Example to Configure Connection with WPA	98
Country Channel List	114
Acknowledgements	117

Introduction

Thank you for purchasing Wireless LAN PCI Card. Wireless card is a perfect combination product of performance and cost-effectiveness. It is sincerely hoped that you can enjoy the wireless world through this solidly profiled wireless card. It provides a full solution of the IEEE 802.11b/g protocols, this solution passed the WiFi tests that are compatible with all the wireless products with WiFi logo. If you have a wireless card on hand, it means you can connect to the wireless world without any difficulty.

It provides all the data rates in the IEEE 802.11b/g standards, which confines the highest data rate as 54Mbps. In addition, it rewards customers with proprietary “Turbo mode” for a better throughput as well as supports both the short and long preambles to ensure the compatibilities with legacy wireless products and new ones, saving the panic works for finding compatible products.

Since the security has become one of the most important issue in the wireless society, it provides you with the full security coverage from the naïve 64/128bits Wep encryptions, second generation WPA-PSK and WPA-AES encryption, to the most advanced WPA2-PSK and WPA2-AES encryption. WPA2 is the latest security standard currently approved by WiFi standard.

Specifications

Interface	PCI
Standard	802.11b, 802.11g
OS support	98SE, WinME, Win2000, WinXP32, WinXP64, Vista32, Vista64
Data rate	1,2,5.5,11,6,8,12,18,24,36,48,54Mbps, depends on the wireless mode
Frequency band	BG:2.4 ~ 2.497 GHz
Operation Channel	1~11(BG)
Coverage Area	Indoors: 100m (BG) Outdoors: 400m (BG)
Compatibility	Fully compatible with IEEE 802.11 b/g devices
Operation Mode	Infrastructure and AdHoc
Security Capacity	64-bit/128-bit WEP, TKIP,WPA-AES, and WPA2-PSK,WPA2-AES
Antenna	External antenna
LED	LED0: On: link is on. Off: link is off LED1:Blinking: data transition
Turbo mode	Active when there is no other station around
Power Saving mode	Fast wake up and maximum power saving
Other features	Dynamically adjust power for the most stable and best throughput Dynamically adjust receiving ability for the best receiving Compiled with all the main radio regulations


Installation

Hardware Installation

Install Wireless LAN PCI Card (card only) into your computer PCI slot as below.




Install antenna to your Wireless LAN PCI Card as picture below.

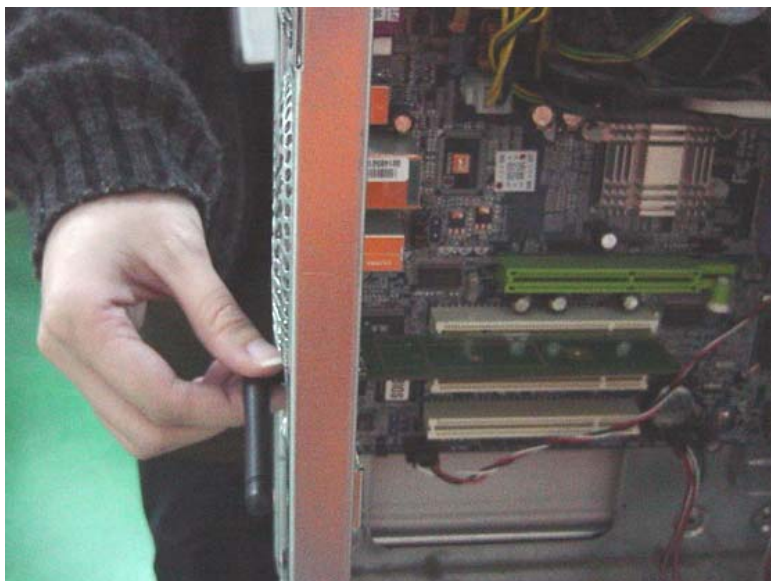

Software Installation


Click My Computer icon, then click DVD, then click autorun

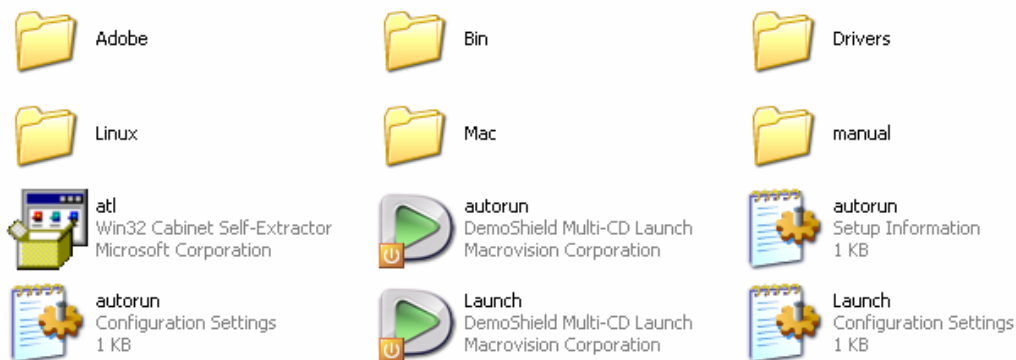


Click Driver Installation




Click I accept the term of the license agreement ,then click Next icon.

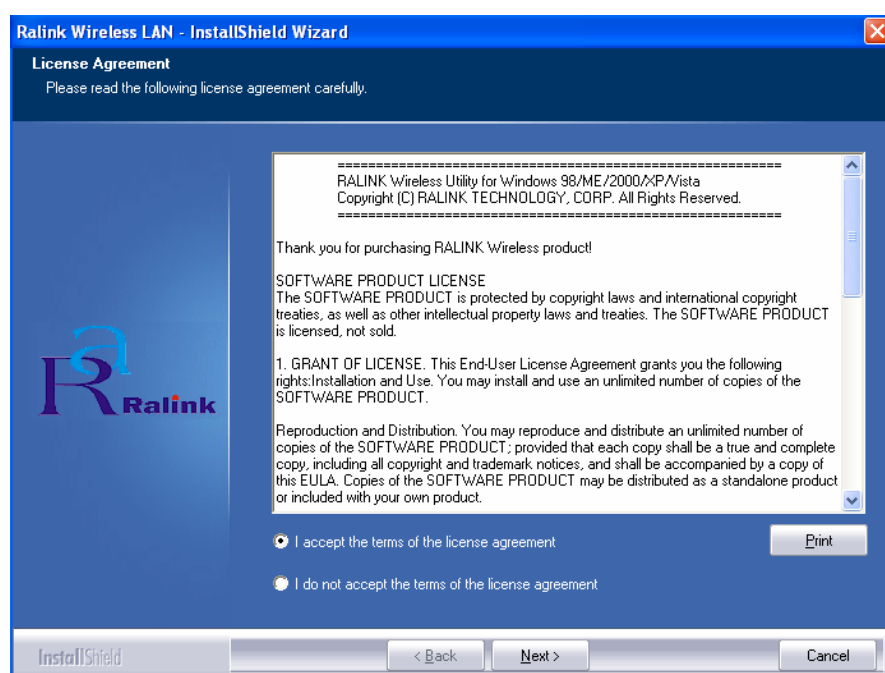


Click Ralink Configuration Tool, then click Next icon.

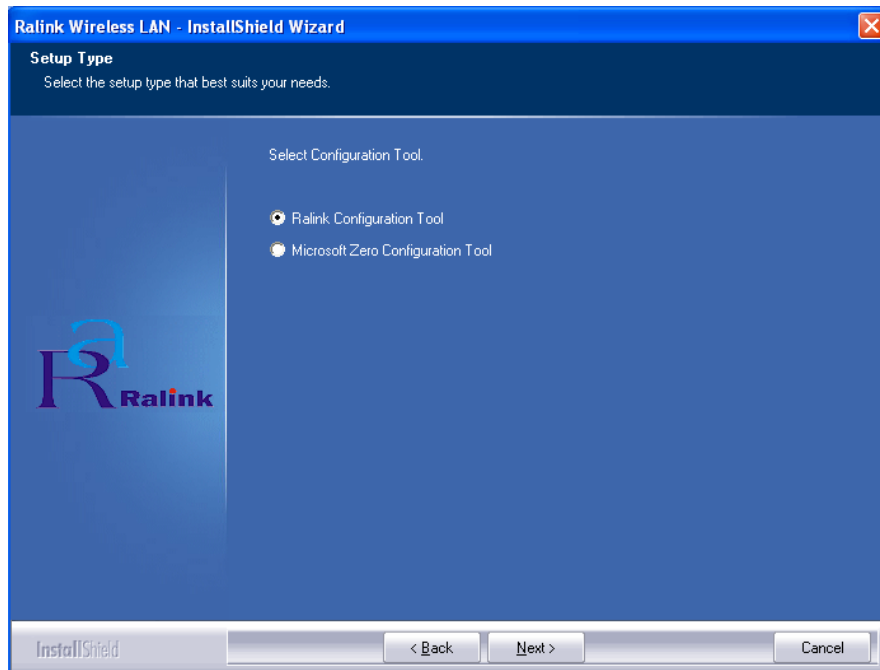


Click Optimize for WiFi modes, then click Next icon.

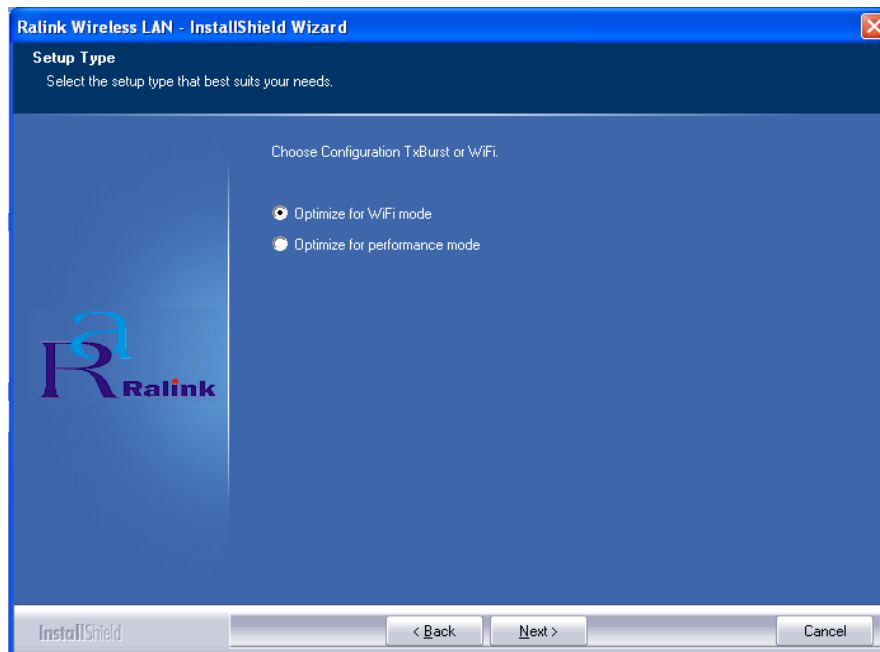

Click Install icon.

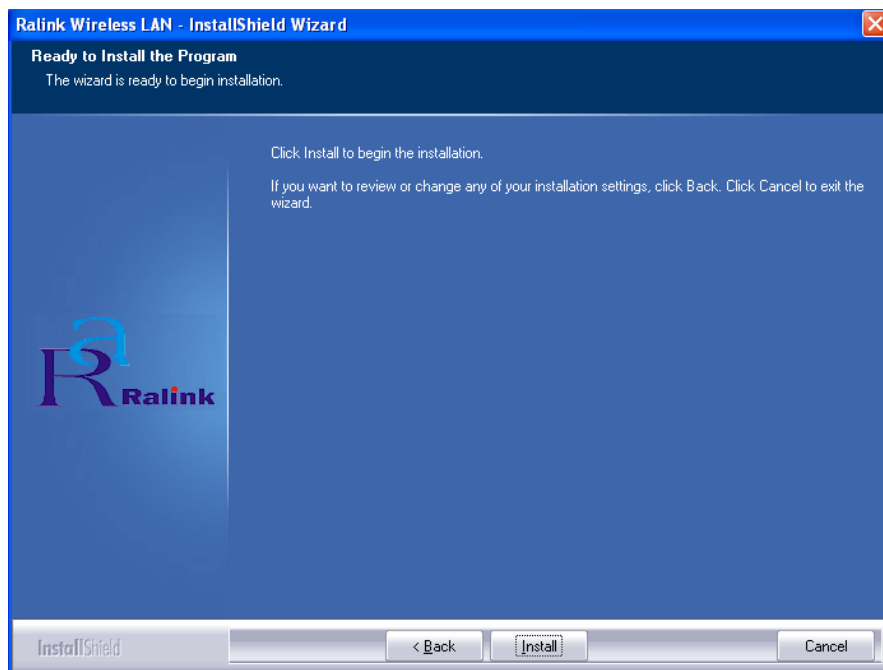


Click Finish icon.

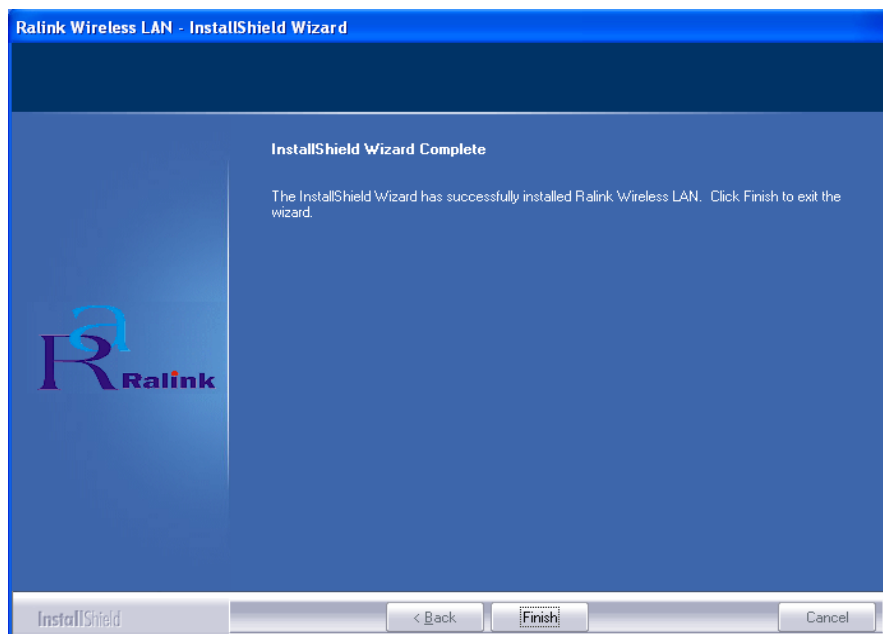


Software Uninstall

Click My Computer icon, then click Add or Remove Program icon, and then click Ralink Wireless LAN icon and then click Remove icon.

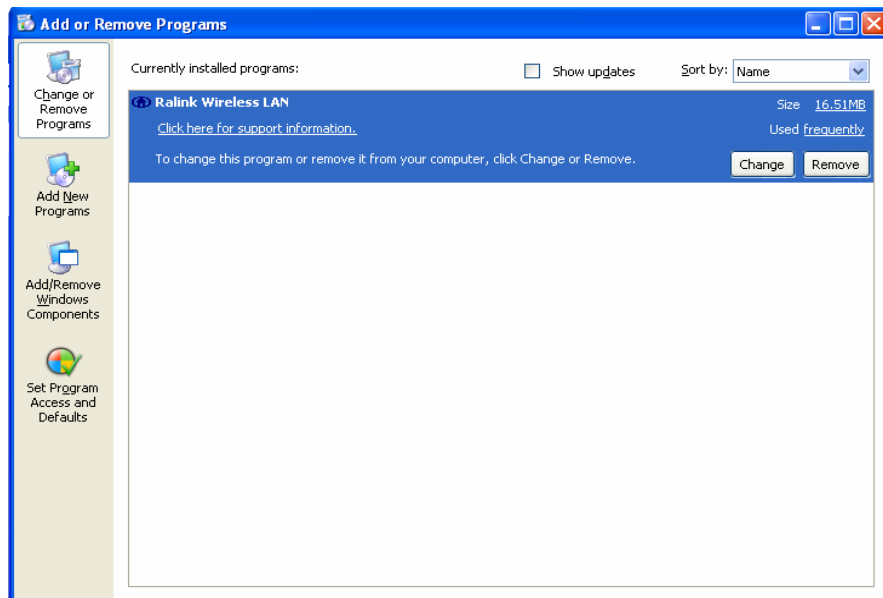

Click Yes, I want to restart my computer now icon, and then Finish icon.

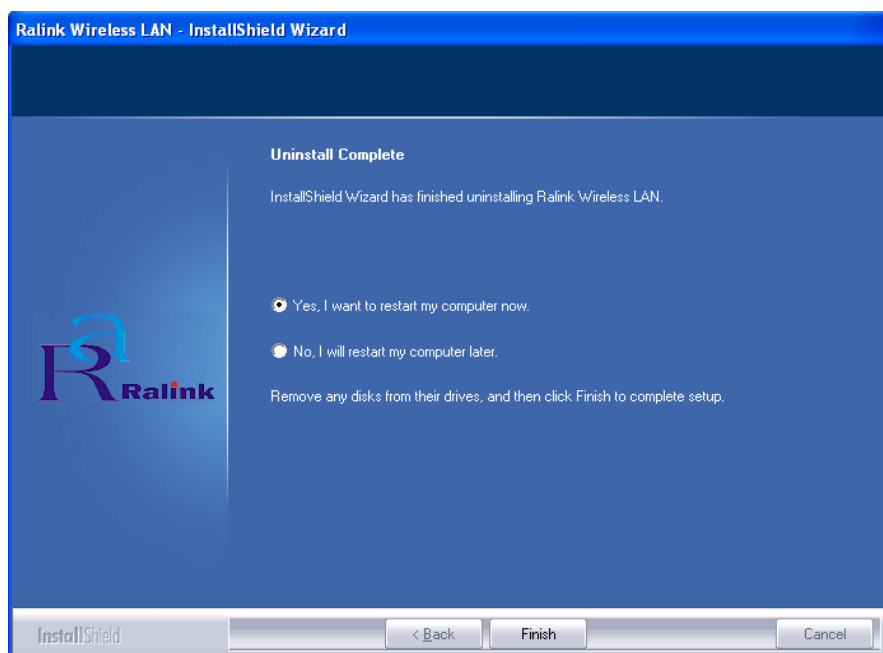

Ralink Wireless Utility (RaUI) or Windows Zero Configuration (WZC)

In windows XP, it provides wireless configuration utility named "Windows Zero configuration" which provides basic configuration function for Ralink Wireless NIC. Ralink's utility (RaUI) provides WPA supplicant functionality. To make it easier for user to select the correct utility. RaUI will let user make the selection when it first runs after windows XP boots.

Click Figure 1-1 the icon will bring up the selection window and let user make the selection.



Figure 1-1 RaUI.exe

RaUI can co-exist with [WZC](#). When coexisting with [WZC](#), RaUI only provides monitoring function, such as link status, network status, statistic counters, advance feature status, WMM status and WPS status. It won't interfere with WZC's configuration or profile functions. It is shown as Figure 1-2.



Figure 1-2 Select WZC or RaUI

If "Use RaConfig as Configuration utility" is selected, please jump to [Section 2](#) on running RaUI.

If "Use Zero Configuration as Configuration utility" is selected, please continue on the section. We will explain the difference between RaUI and [WZC](#). Figure 1-3 shows the RaUI status when [WZC](#) is active as main control utility.

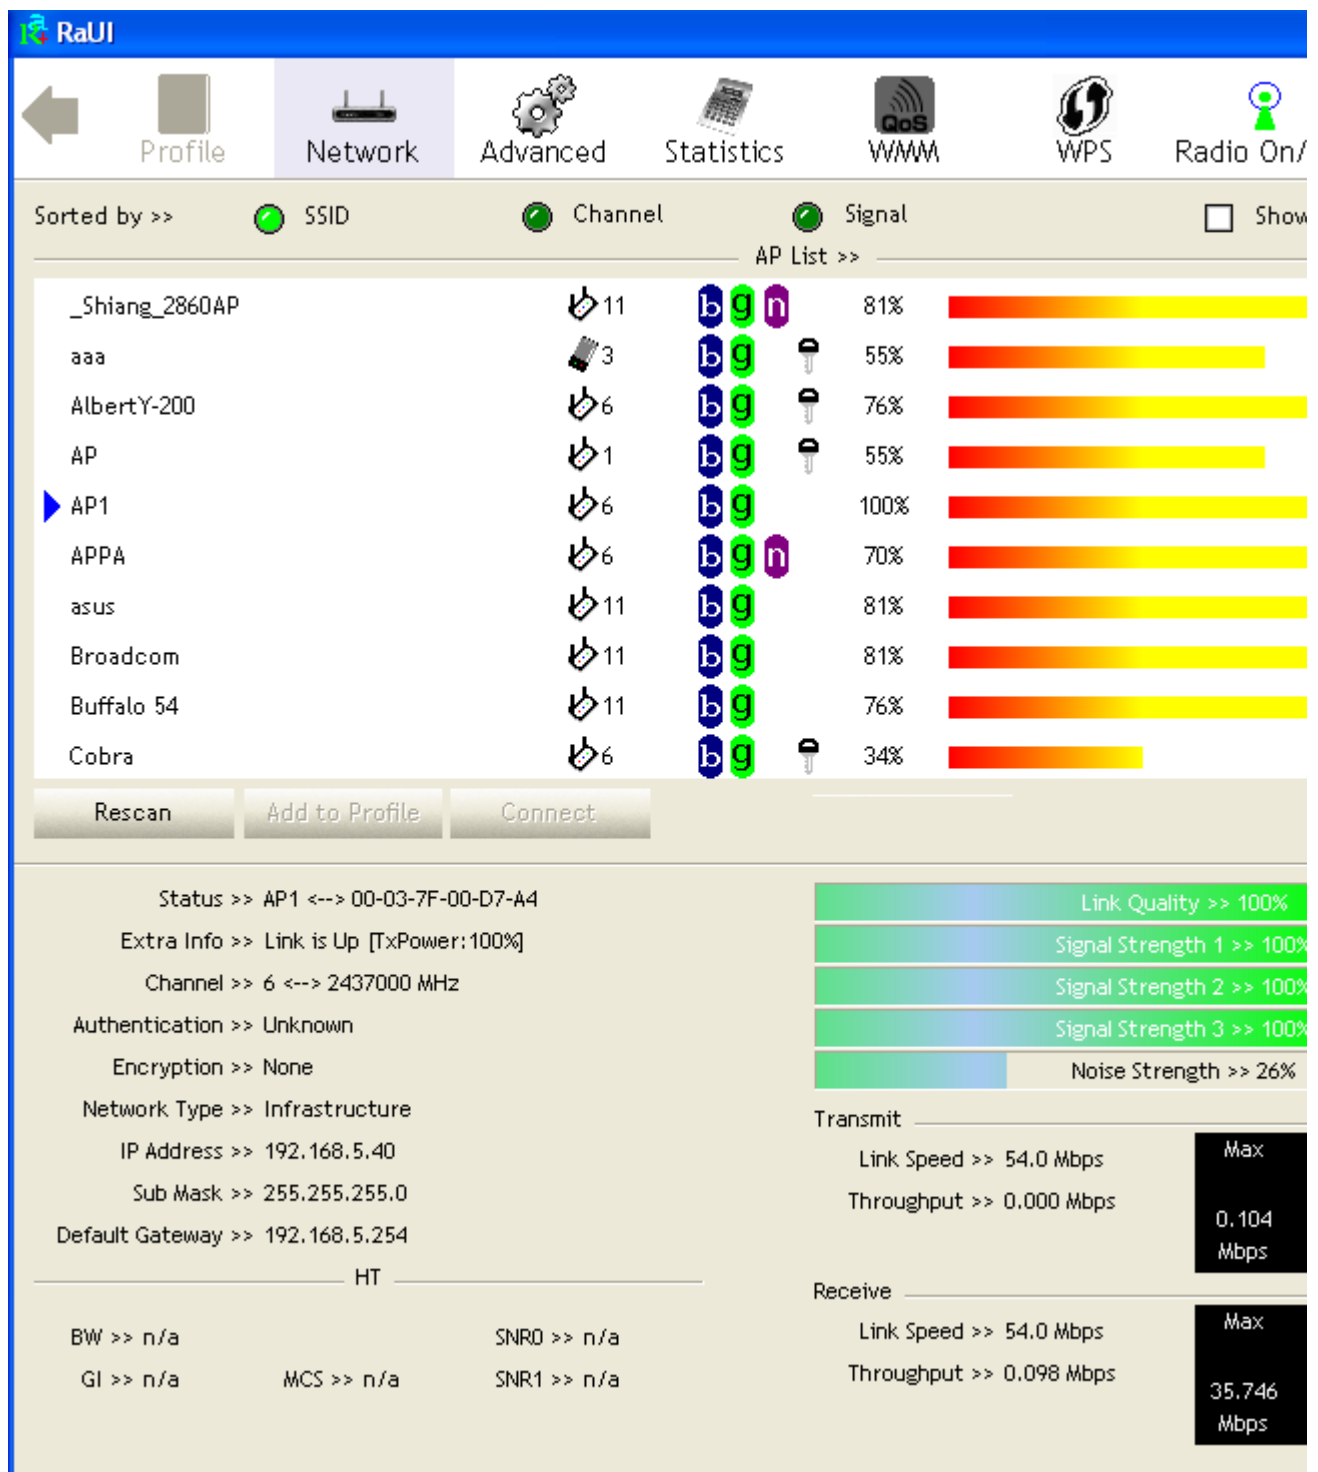


Figure 1-3 RaUI status with WZC active

When activating [WZC](#), there are couple difference on RaUI status compared to that without [WZC](#) running.

- ① Profile button will be gray, profile function is removed since the NIC is controlled by [WZC](#).
- ② The connect and add profile function will be gray. The reason is same as the first difference.

For all other functions provided by RaUI, please read through this document for full detail.

Use WZC to configure wireless NIC

- 1 If connection is lost or not connected, the status prompt as Figure 1-4 will pop up.

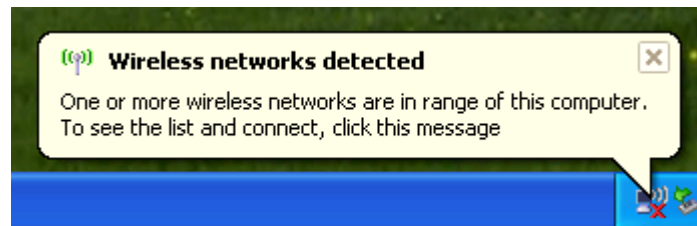


Figure 1-4 status prompt of no connection

- 2 Right-click the network connection icon in task bar.



Figure 1-5 Select WZC main status

- 3 Select "View Available Wireless Networks" will pop up the dialog shown as Figure 1-6.

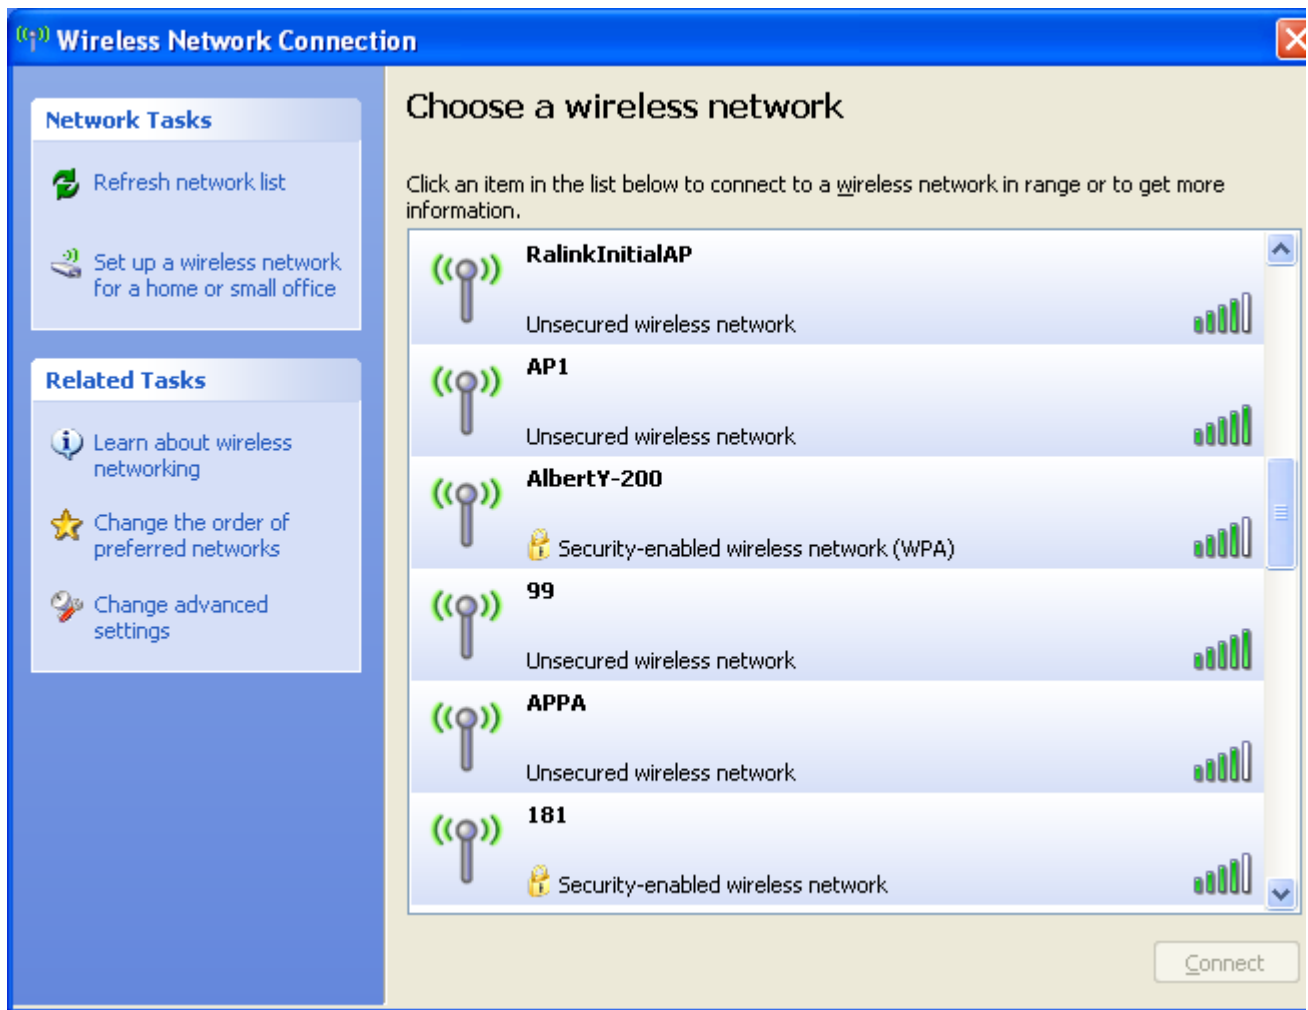


Figure 1-6 Wireless Network Connection

- 4 Select intended AP and click "Connect" shown as Figure 1-7. Then click "Connect Anyway" shown as Figure 1-8.

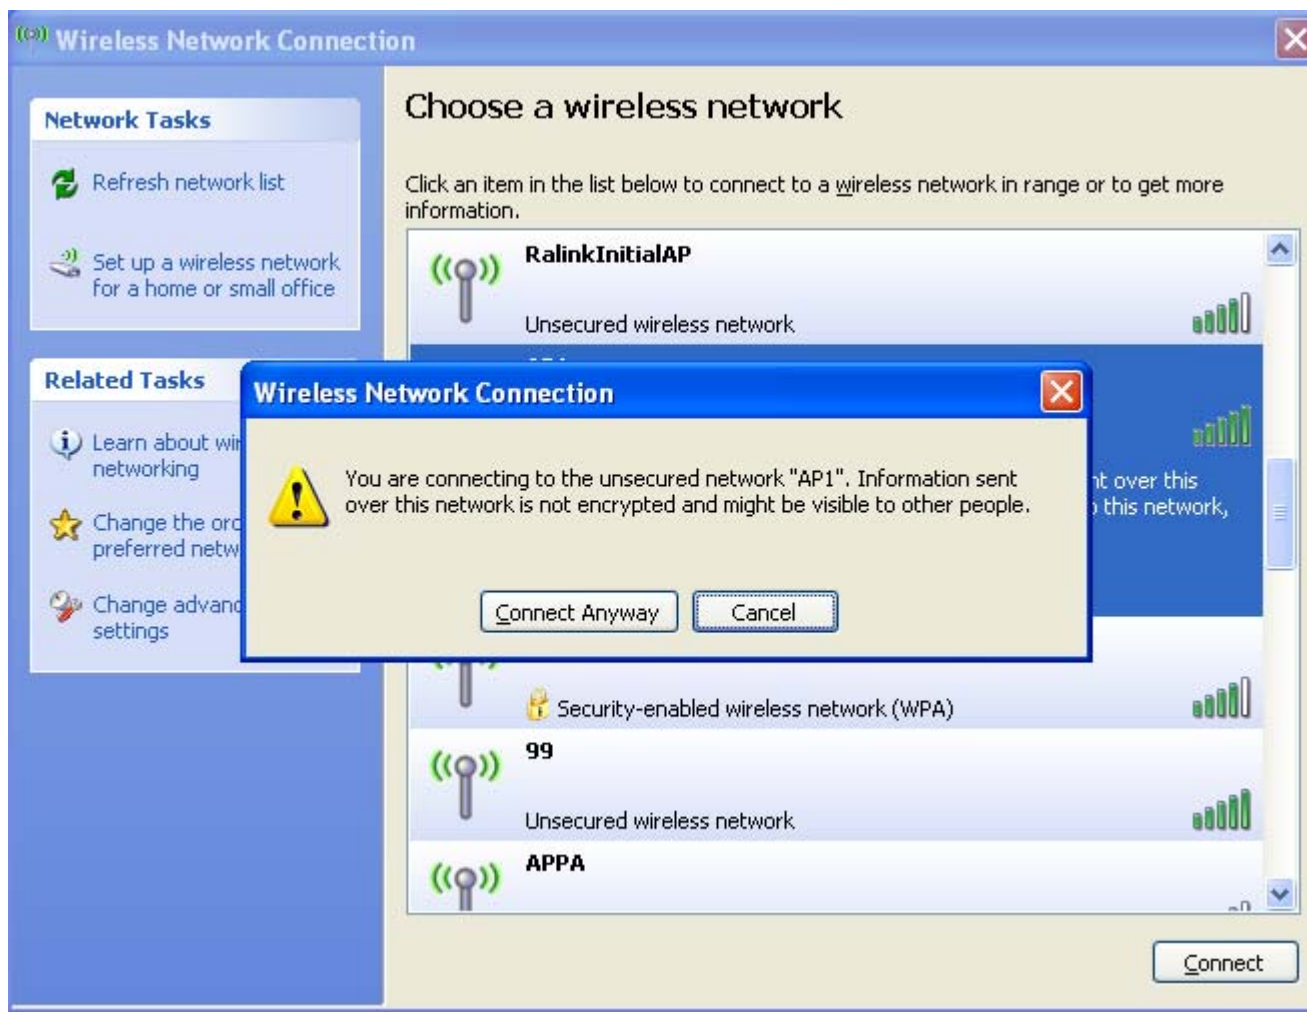


Figure 1-7 Select intended AP : AP1, then click "Connect"

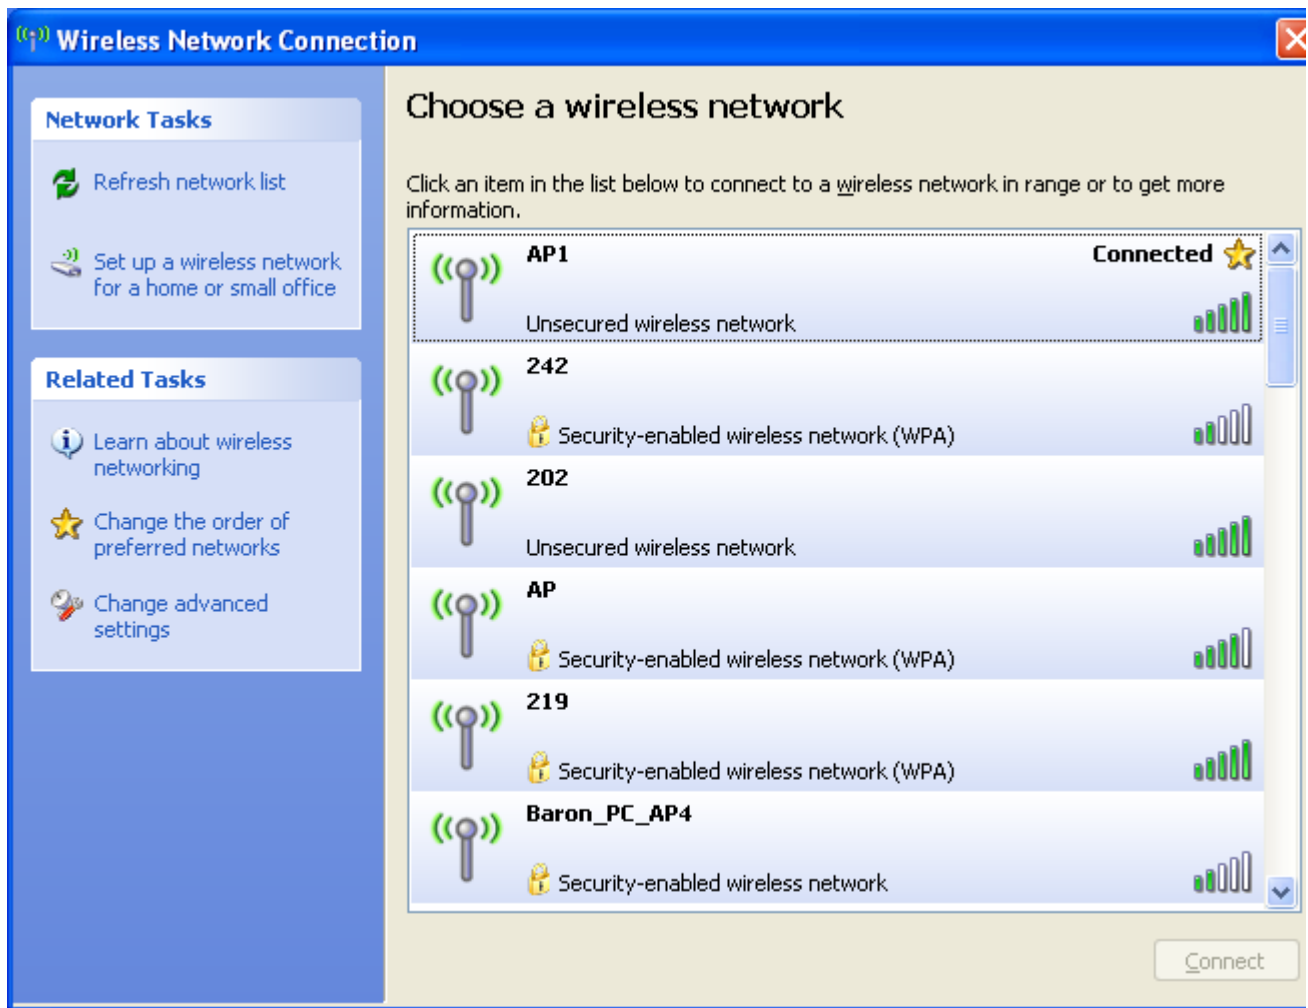


Figure 1-8 Connect AP : AP1 successfully

5 If you want to modify information about AP, click "Change advanced settings" shown as Figure 1-9. Then choose "Wireless Networks" label shown as Figure 1-10.

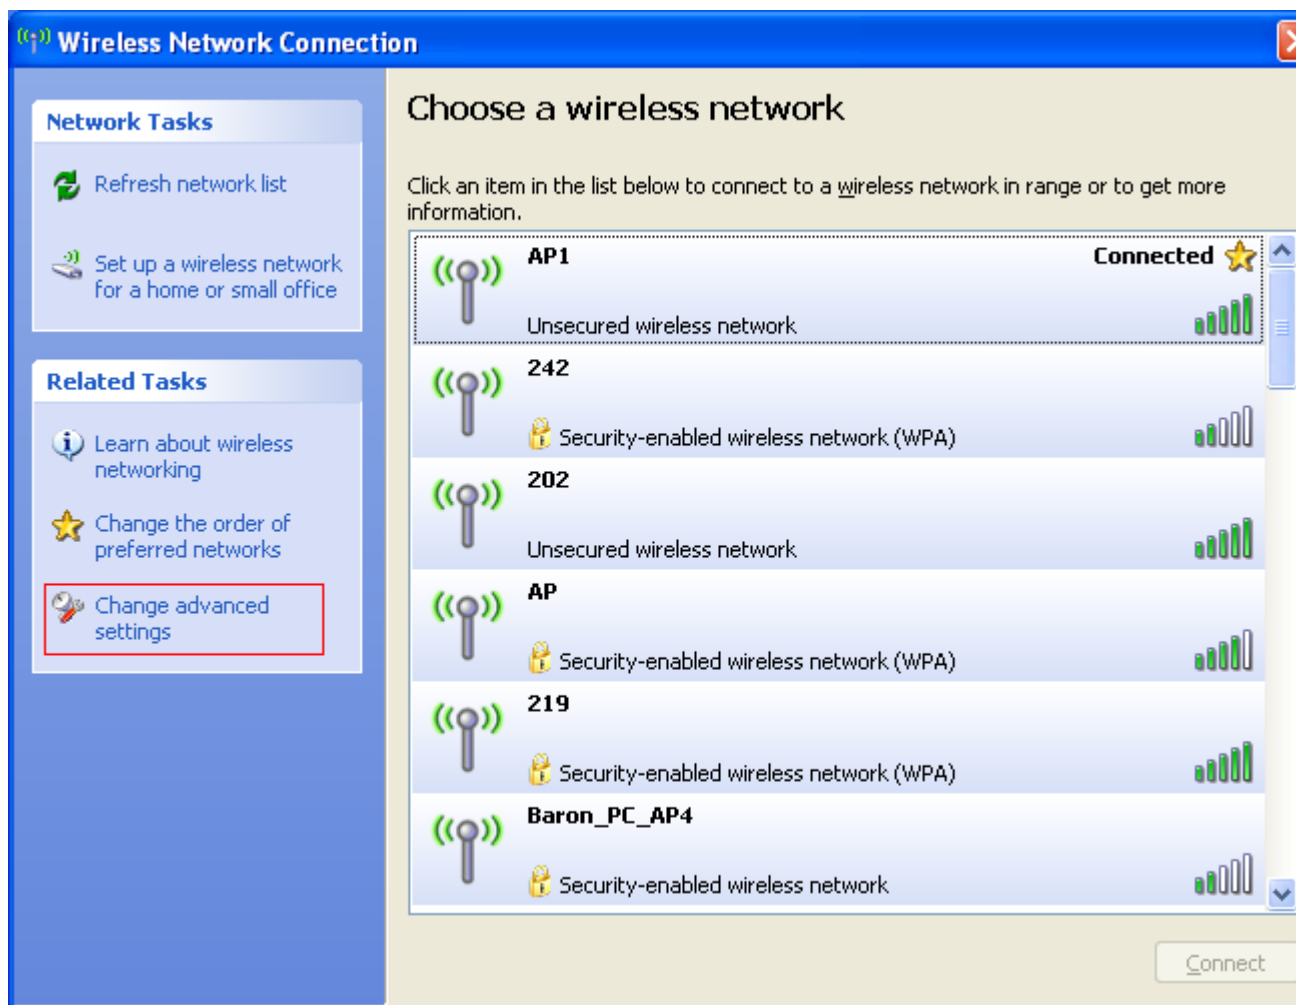


Figure 1-9 Click "Change advanced settings"

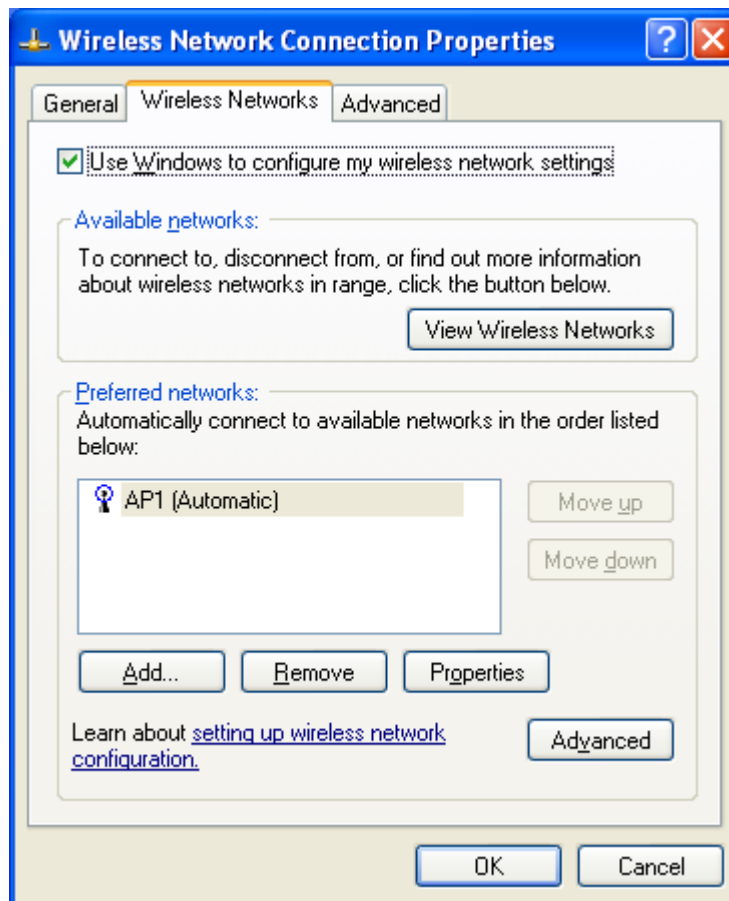


Figure 1-10 Choose "Wireless Networks" label

- 6 Click "Properties" shown as Figure 1-11. Then click "OK" button.

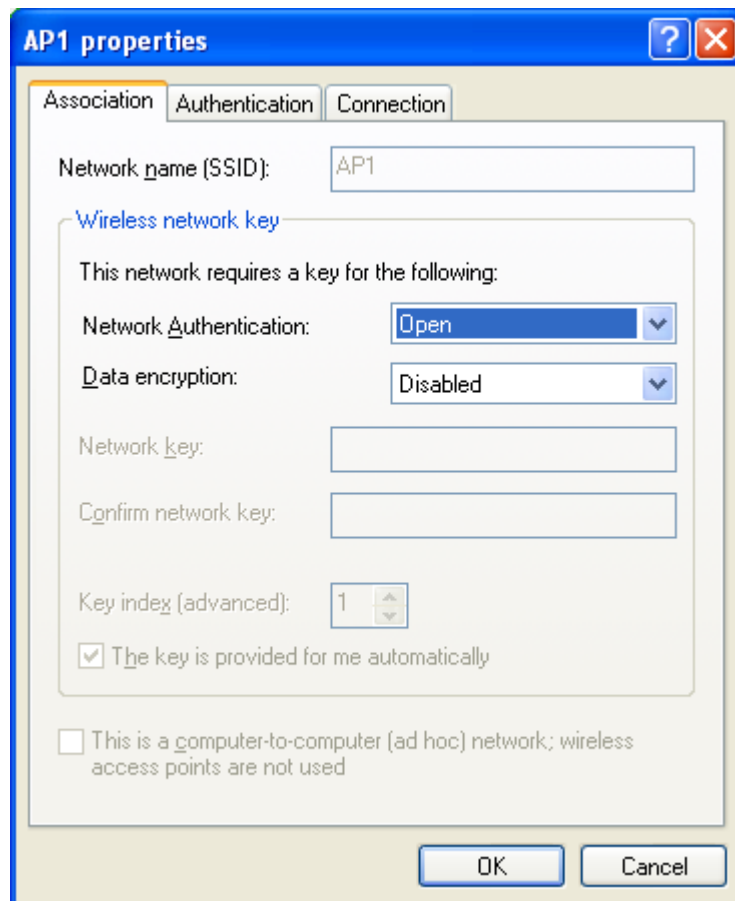


Figure 1-11 AP's properties

7 After filling appropriate value, click "OK" button. And the status will prompt up as Figure 1-12.

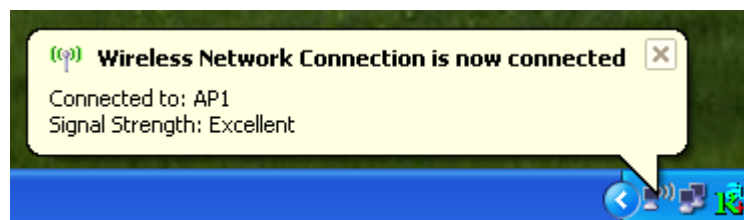


Figure 1-12 Network connection status

8 Click the Ralink's icon will bring up RaUI main window. User can find the surrounding APs in the list. The current connected AP will also shown with the green icon indicated as Figure 1-13. User may use the advance tab to configure more advanced features provided by Ralink's wireless NIC. For the detail on configure the advanced features, please check the Advance setting section for detail.

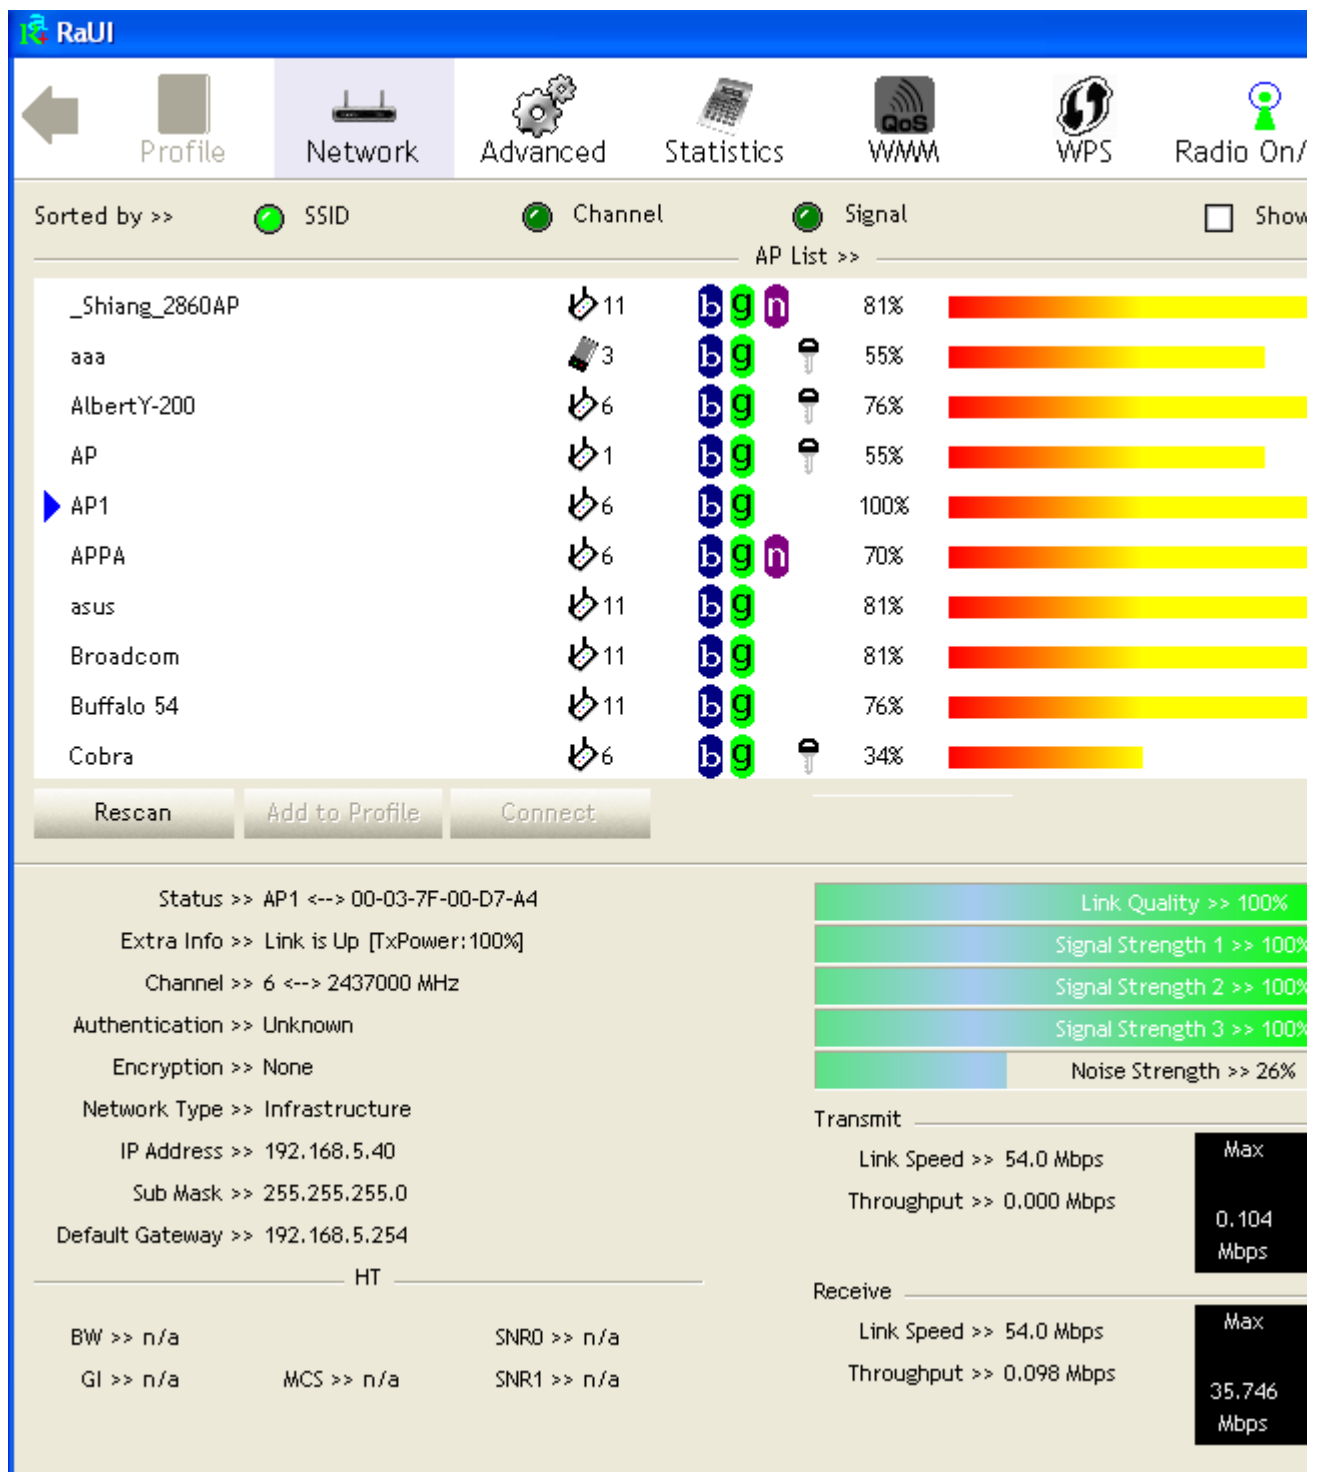


Figure 1-13 Show connection status by using WZC to do connection

Start RaUI

When starting RaUI, system will connect to the AP with best signal strength without setting profile or matching profile setting. When starting RaUI, it will issue a scan command to wireless NIC. After two seconds, the AP list will updated with the result of BSS list scan. The AP list include most used fields, such as SSID, network type, channel used, wireless mode, security status and signal percentage. The arrow icon indicates the connected BSS or IBSS network. The page is shown as Figure 2-1.

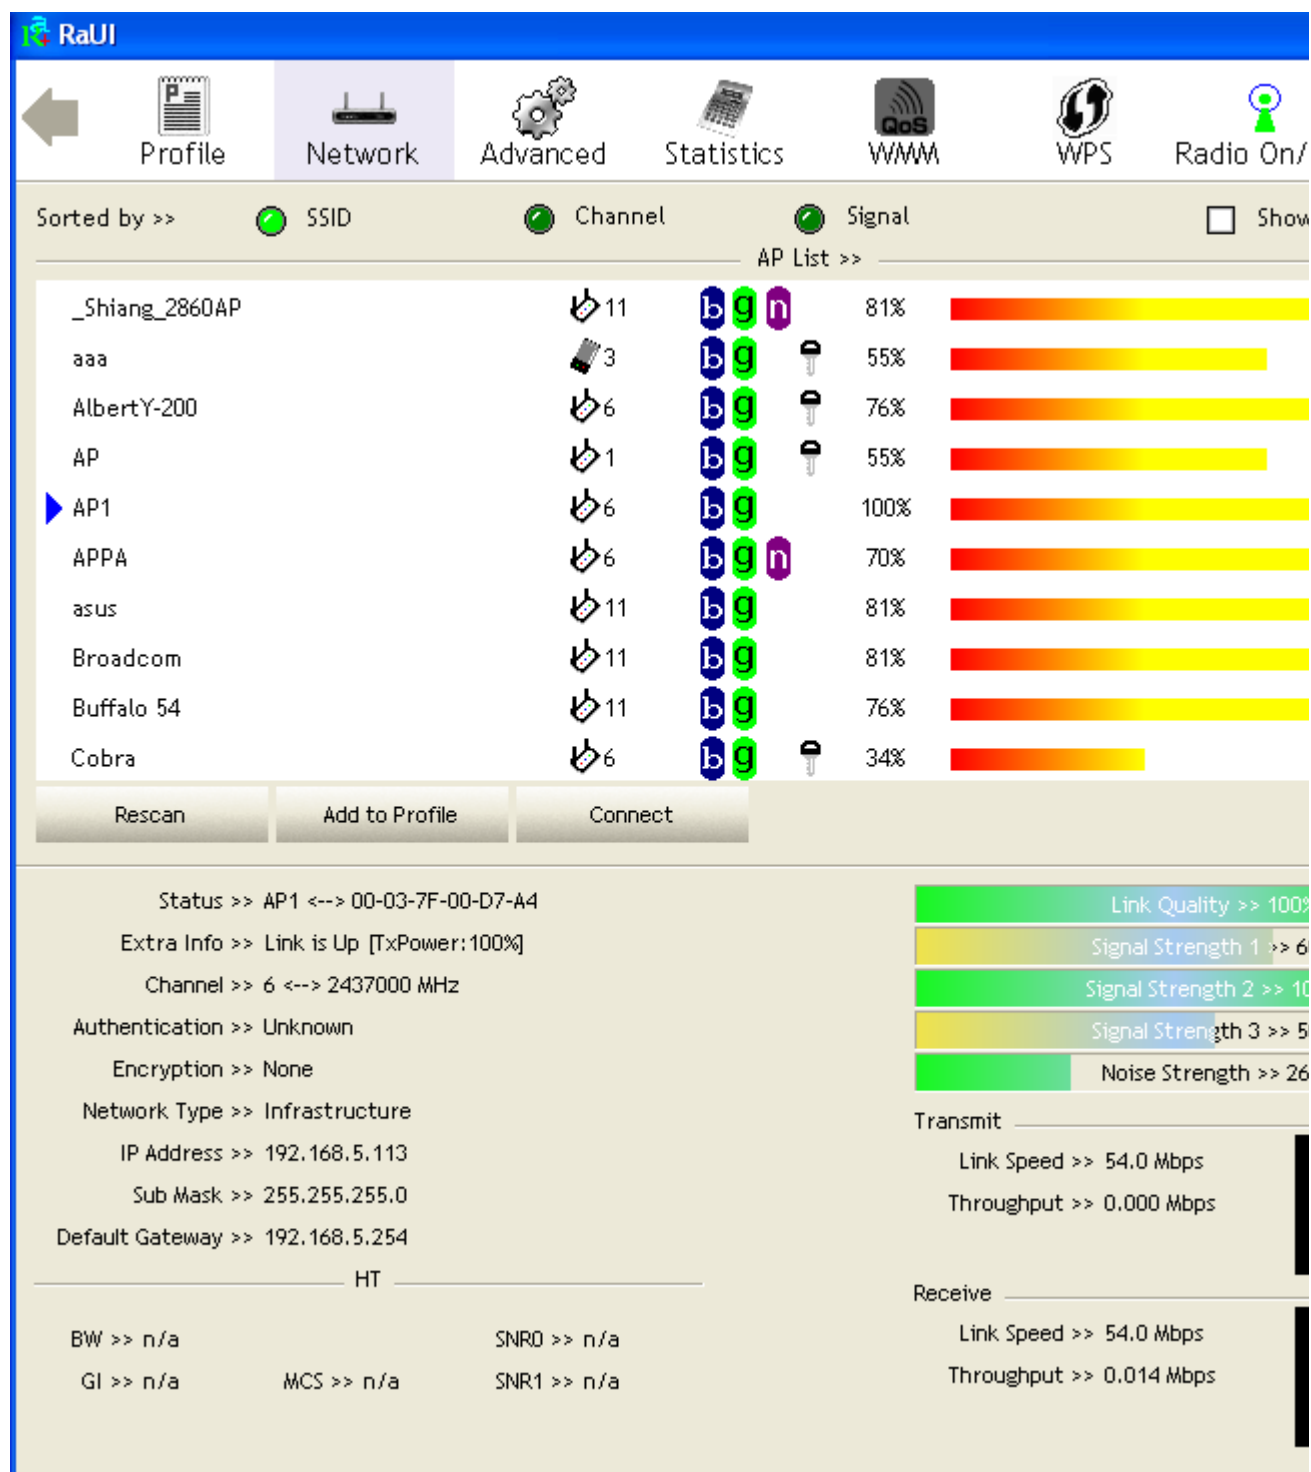


Figure 2-1-1 RaUI section introduction

There are three sections in RaUI. These sections are briefly described as follow.

① Button Section : Include Profile page, Network page, Advanced page, Statistics page, WMM page, WPS page, About button, Radio On/Off button and Help button.



Figure 2-1-2 Button section



Figure 2-1-3 Move to the left



Figure 2-1-4 Move to the right

② Function Section : Corresponding button.

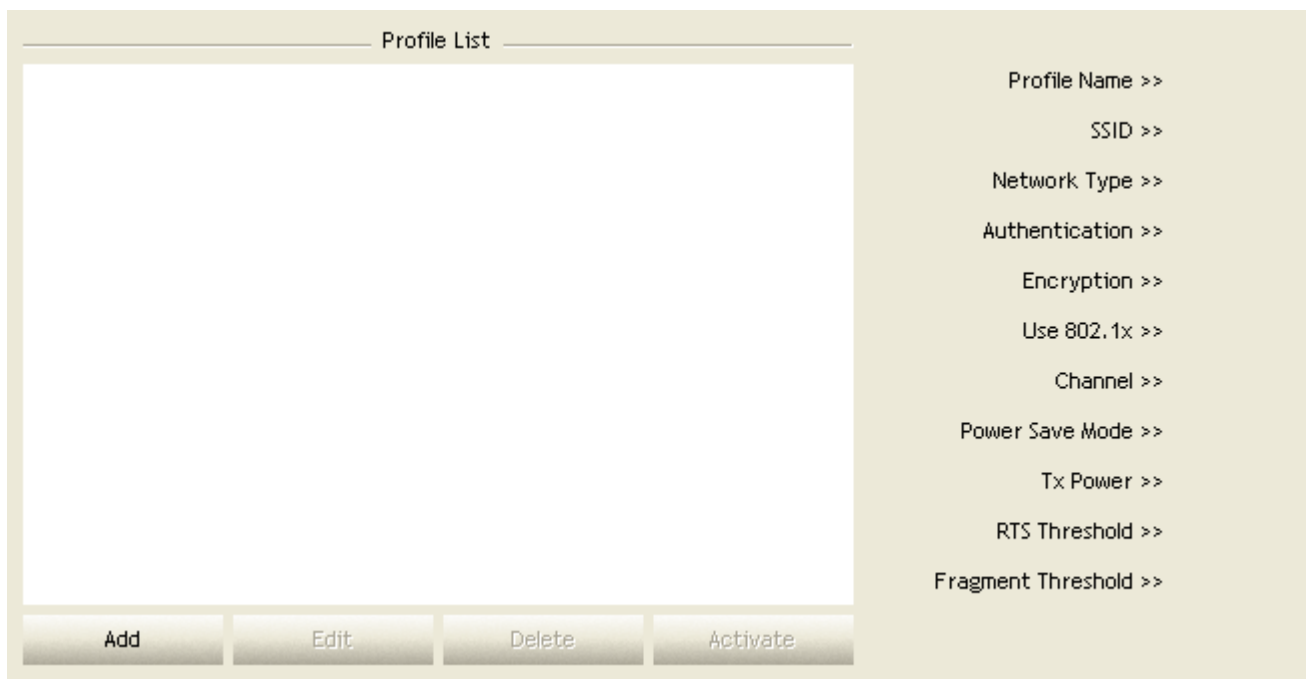


Figure 2-1-5 Profile page

Sorted by >>	SSID	Channel	Signal	AP List >>	Show
	_Shiang_2860AP	11	b g n	81%	
	aaa	3	b g	55%	
	AlbertY-200	6	b g	76%	
	AP	1	b g	55%	
▶	AP1	6	b g	100%	
	APPA	6	b g n	70%	
	asus	11	b g	81%	
	Broadcom	11	b g	81%	
	Buffalo 54	11	b g	76%	
	Cobra	6	b g	34%	
Rescan Add to Profile Connect					

Figure 2-1-6 Network page

Wireless mode >> 802.11 A/B/G/N mix ☐ Enable CCX (Cisco Compatible eXtensions)

☐ Turn on CCKM

☐ Enable Radio Measurements

☐ Non-Serving Channel Measurements limit 250

☐ Enable TX Burst

☐ Enable TCP Window Size

☐ Fast Roaming at -70 dBm

☐ Show Authentication Status Dialog

Select Your Country Region Code

11 B/G >> 0: CH1-11

11 A >> 7: CH 36,40,44,48,52,56,60,64,100

Apply

Figure 2-1-7 Advance page

Transmit

Receive

Frames Transmitted Successfully

=

Frames Retransmitted Successfully

=

Frames Fail To Receive ACK After All Retries

=

RTS Frames Successfully Receive CTS

=

RTS Frames Fail To Receive CTS

=

Reset Counter

Figure 2-1-8 Statistics page

WMM Setup Status

WMM >> Enabled

Power Save >> Disabled

Direct Link Setup >> Disabled

☒ WMM Enable

☐ WMM - Power Save Enable

☐ AC_BK
 ☐ AC_BE
 ☐ AC_VI
 ☐ AC_VO

☐ Direct Link Setup Enable

MAC Address >>

Timeout Value >>

60

sec

Apply

Cancel

Figure 2-1-9 WMM page

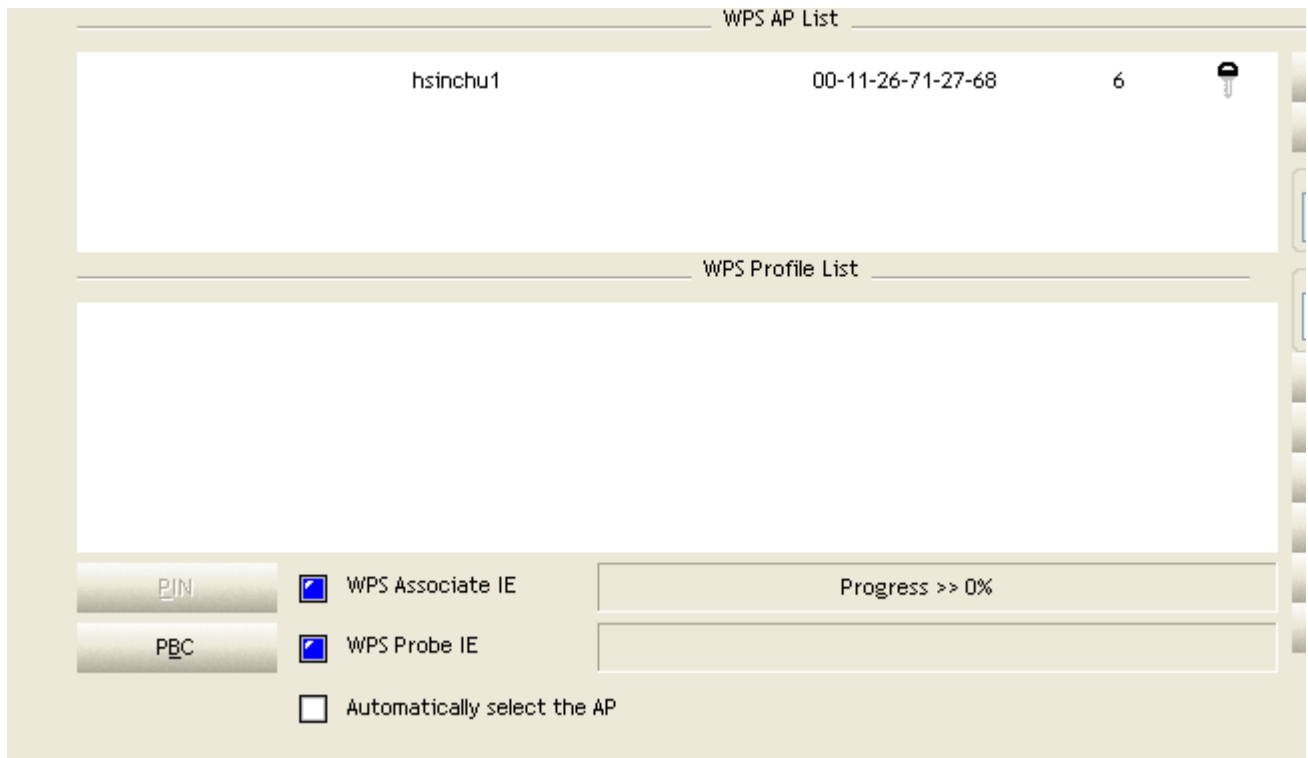


Figure 2-1-10 WPS page



Figure 2-1-11 About page

③ Status Section : Include Link Status, Authentication Status, AP's information, Configuration and retrying the connection when authentication is failed.

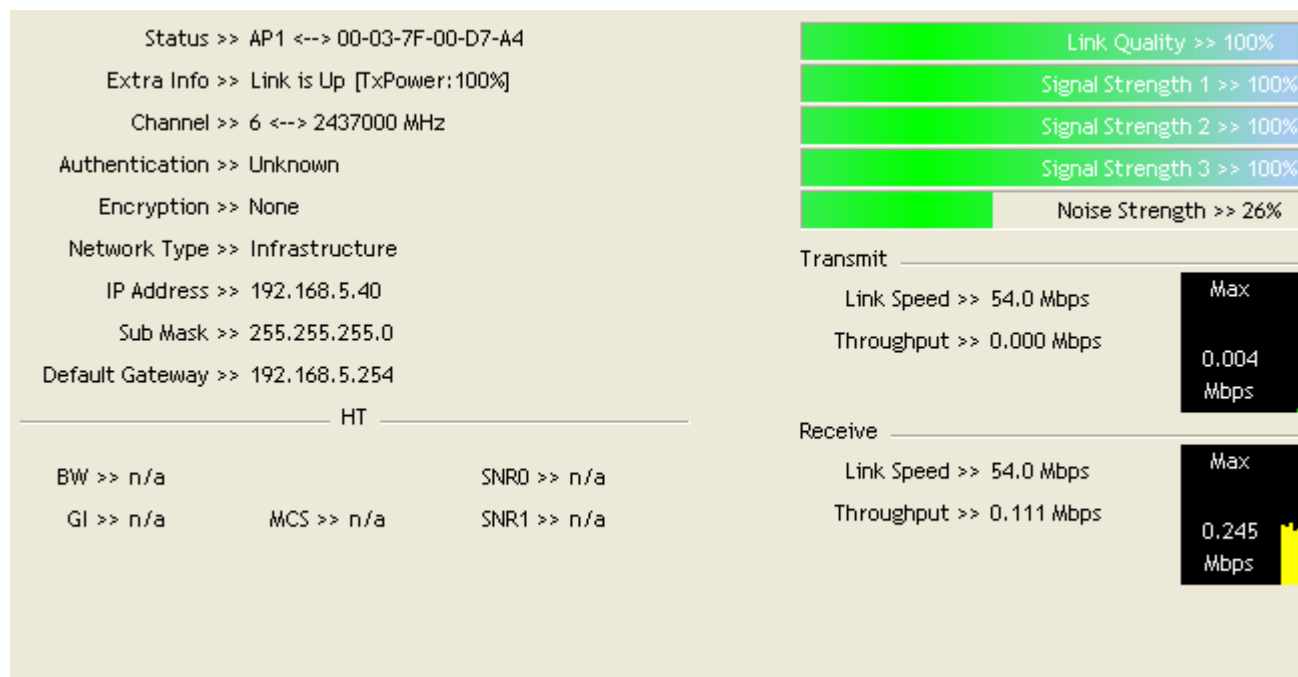


Figure 2-1-12 Link Status

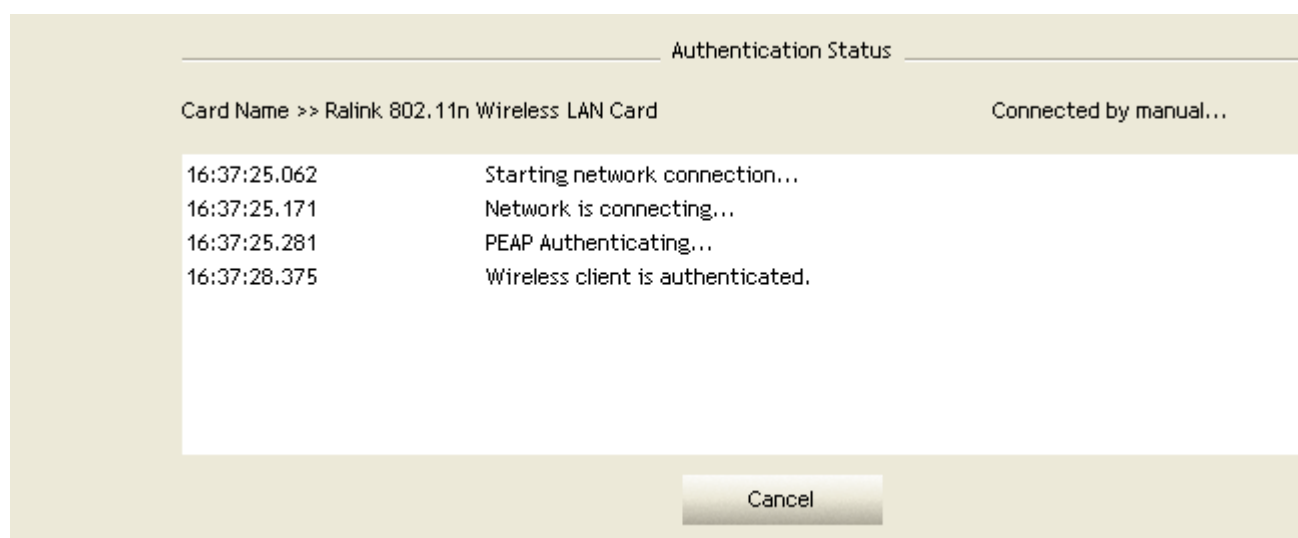


Figure 2-1-13 Authentication Status

General	WPS	CCX
SSID >> AP1		
MAC Address >> 00-03-7F-00-D7-A4		Signal Strength >> 100%
Authentication Type >> Unknown		Supported Rates (Mbps) 1, 2, 5.5, 11, 6, 12, 24, 36, 9, 18, 48, 54
Encryption Type >> None		
Channel >> 6 <--> 2437000 KHz		
Network Type >> Infrastructure		
Beacon Interval >> 100		
OK		

Figure 2-1-14 AP's Information

Card Name >> Ralink 802.11n Wireless LAN Card	Identity >>
Profile Name >> PROF1	Password >>
Message >> Invalid identity or password	
OK Cancel	

Figure 2-1-15 Retry the connection

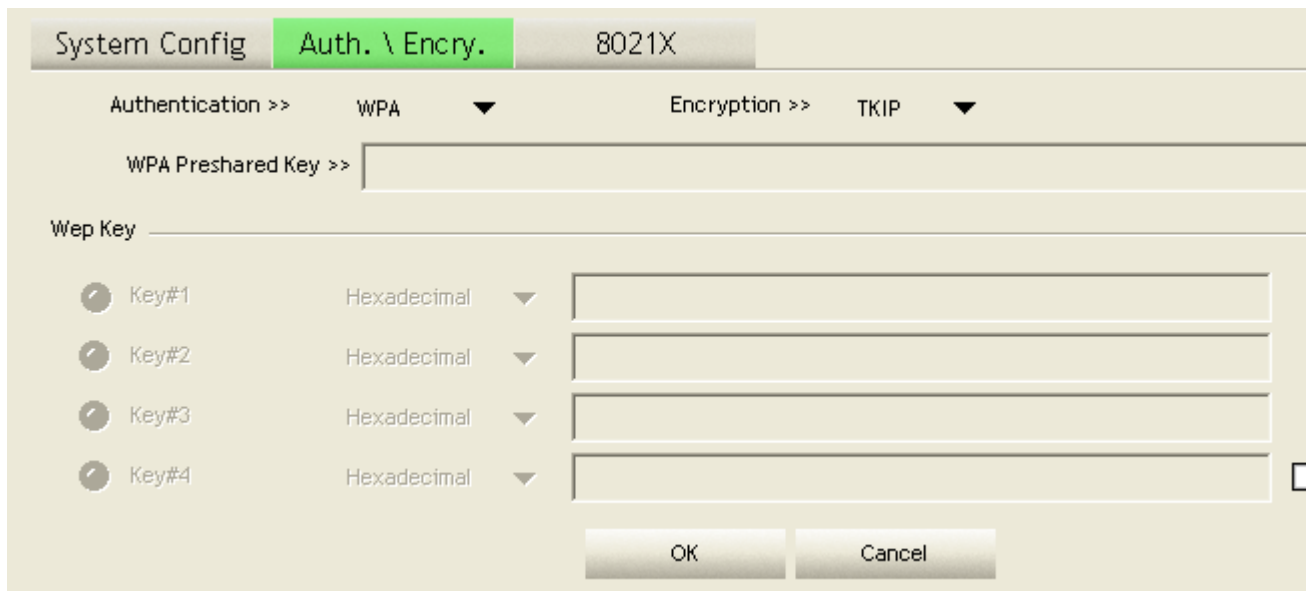


Figure 2-1-16 Configuration

At the mean time of starting RaUI, there is also a small Ralink icon appears within windows taskbar as Figure 2-1-15. You may double click it to bring up the main menu if you selected to close RaUI menu eariler. You may also use mouse's right button to close RaUI utility.



Figure 2-1-17 Ralink icon in system tray

Besides, the small icon will change color to reflect current wireless network connection status. The status indicates as follow:

-  : Indicate Connected and Signal Strength is Good.
-  : Indicate Connected and Signal Strength is Normal.
-  : Indicated not connected yet.
-  : Indicated wireless NIC not detected.
-  : Indicate Connected and Signal Strength is Weak.

Profile

Profile can book keeping your favorite wireless setting among your home, office, and other public hot-spot. You may save multiple profiles, and activate the correct one at your preference. Figure 2-2-1 show the profile function.

The screenshot shows a web interface titled "Profile List". On the left is a large empty box for the profile list. On the right is a list of configuration options, each followed by ">>":

- Profile Name >>
- SSID >>
- Network Type >>
- Authentication >>
- Encryption >>
- Use 802.1x >>
- Channel >>
- Power Save Mode >>
- Tx Power >>
- RTS Threshold >>
- Fragment Threshold >>

At the bottom of the interface are four buttons: "Add", "Edit", "Delete", and "Activate".

Figure 2-2-1 Profile function

Definition of each field :

- ① Profile Name : Name of profile, preset to PROF* (* indicate 1, 2, 3...).
- ② SSID : AP or Ad-hoc name.
- ③ Network Type : Network's type, including infrastructure and Ad-Hoc.
- ④ Authentication : Authentication mode.
- ⑤ Encryption : Encryption Type.
- ⑥ Use 802.1x : Whether or not use 802.1x feature.
- ⑦ Cannel : Channel in use for Ad-Hoc mode.
- ⑧ Power Save Mode : Choose from CAM (Constantly Awake Mode) or Power Saving Mode.
- ⑨ Tx Power : Transmit power, the amount of power used by a radio transceiver to send the signal out.
- ⑩ RTS Threshold : User can adjust the RTS threshold number by sliding the bar or key in the value directly.
- ⑪ Fragment Threshold : User can adjust the Fragment threshold number by sliding the bar

or key in the value directly.

Icons and buttons :



Indicate connection is successful on currently activated profile.



Indicate connection is failed on currently activated profile.




Indicate network type is infrastructure mode.




Indicate network type is Ad-hoc mode.




Indicate security-enabled wireless network.



Add a new profile.



Edit an existing profile.



Delete an existing profile.



Activate selected profile.



Show the information of Status Section.



Hide the information of Status Section.

Add/Edit Profile

There are three methods to open Profile Editor form.

- ① You can open it from "Add to Profile" button in Site Survey function.
- ② You can open it from "Add" button in Profile function.
- ③ You can open it from "Edit" button in Profile function.

System Config | Auth. \ Encry. | 802.1X

Profile Name >> PROF1

SSID >> AP1

Network Type >> Infrastructure

Tx Power >> Auto

Preamble >> Auto

Power Save Mode >> ☒ CAM ☐ PSM

☐ RTS Threshold 0 2347

☐ Fragment Threshold 256 2346

OK Cancel

System Config | Auth. \ Encry. | 802.1X

Authentication >> Open

Encryption >> None

☐ 802.1X

WPA Preshared Key >>

Wep Key

☒ Key#1 Hexadecimal

☒ Key#2 Hexadecimal

☒ Key#3 Hexadecimal

☒ Key#4 Hexadecimal

OK Cancel

Figure 2-2-2 Configuration

- ① Profile Name : User can chose name for this profile, or use default name defined by system.
- ② SSID : User can key in the intended SSID name or use pull down menu to select from available APs.
- ③ Power Save Mode : Choose from CAM; Constantly Awake Mode; or Power Saving

Mode.

④ Network Type : There are two types, infrastructure and 802.11 Ad-hoc mode. Under Ad-hoc mode, user can also choose the preamble type, the available preamble type includes auto and long. In addition to that, the channel field will be available for setup in Ad-hoc mode.

⑤ RTS Threshold : User can adjust the RTS threshold number by sliding the bar or key in the value directly. The default value is 2347.

⑥ Fragment Threshold : User can adjust the Fragment threshold number by sliding the bar or key in the value directly. The default value is 2346.

⑦ Channel : Only available for setting under Ad-hoc mode. User can choose the channel frequency to start their Ad-hoc network.

⑧ Authentication Type : There are 7 type of authentication modes supported by RaUI. They are open, Shared, LEAP, WPA and WPA-PSK, WPA2 and WPA2-PSK.

⑨ Encryption Type : For open and shared authentication mode, the selection of encryption type are None and WEP. For WPA, WPA2, WPA-PSK and WPA2-PSK authentication mode, the encryption type supports both TKIP and AES.

⑩ 802.1x Setting : This is introduced in the topic of "[Section 3-2 : 802.1x Setting](#)".

⑪ WPA Pre-shared Key : This is the shared secret between AP and STA. For WPA-PSK and WPA2-PSK authentication mode, this field must be filled with character longer than 8 and less than 32 length.

⑫ WEP Key : Only valid when using WEP encryption algorithm. The key must matched AP's key. There are several formats to enter the keys.

1. Hexadecimal - 40bits : 10 Hex characters.
2. Hexadecimal - 128bits : 26Hex characters.
3. ASCII - 40bits : 5 ASCII characters.
4. ASCII - 128bits : 13 ASCII characters.

Example to Add Profile in Profile

- 1 Click Add in Profile function.

RaUI

Profile Network Advanced Statistics WMM WPS Radio On/Off

Profile List

Profile Name >>
SSID >>
Network Type >>
Authentication >>
Encryption >>
Use 802.1x >>
Channel >>
Power Save Mode >>
Tx Power >>
RTS Threshold >>
Fragment Threshold >>

Add Edit Delete Activate

Status >> AP1 <--> 00-03-7F-00-D7-A4
Extra Info >> Link is Up [TxPower:100%]
Channel >> 6 <--> 2437000 MHz
Authentication >> Unknown
Encryption >> None
Network Type >> Infrastructure
IP Address >> 192.168.5.60
Sub Mask >> 255.255.255.0
Default Gateway >> 192.168.5.254

HT

BW >> n/a SNR0 >> n/a
GI >> n/a MCS >> n/a SNR1 >> n/a

Link Quality >> 100%
Signal Strength 1 >> 5
Signal Strength 2 >> 1
Signal Strength 3 >> 2
Noise Strength >> 0


Transmit

Link Speed >> 54.0 Mbps
Throughput >> 0.000 Mbps

Receive

Link Speed >> 54.0 Mbps
Throughput >> 0.025 Mbps

- 2 Add Profile page will pop up.

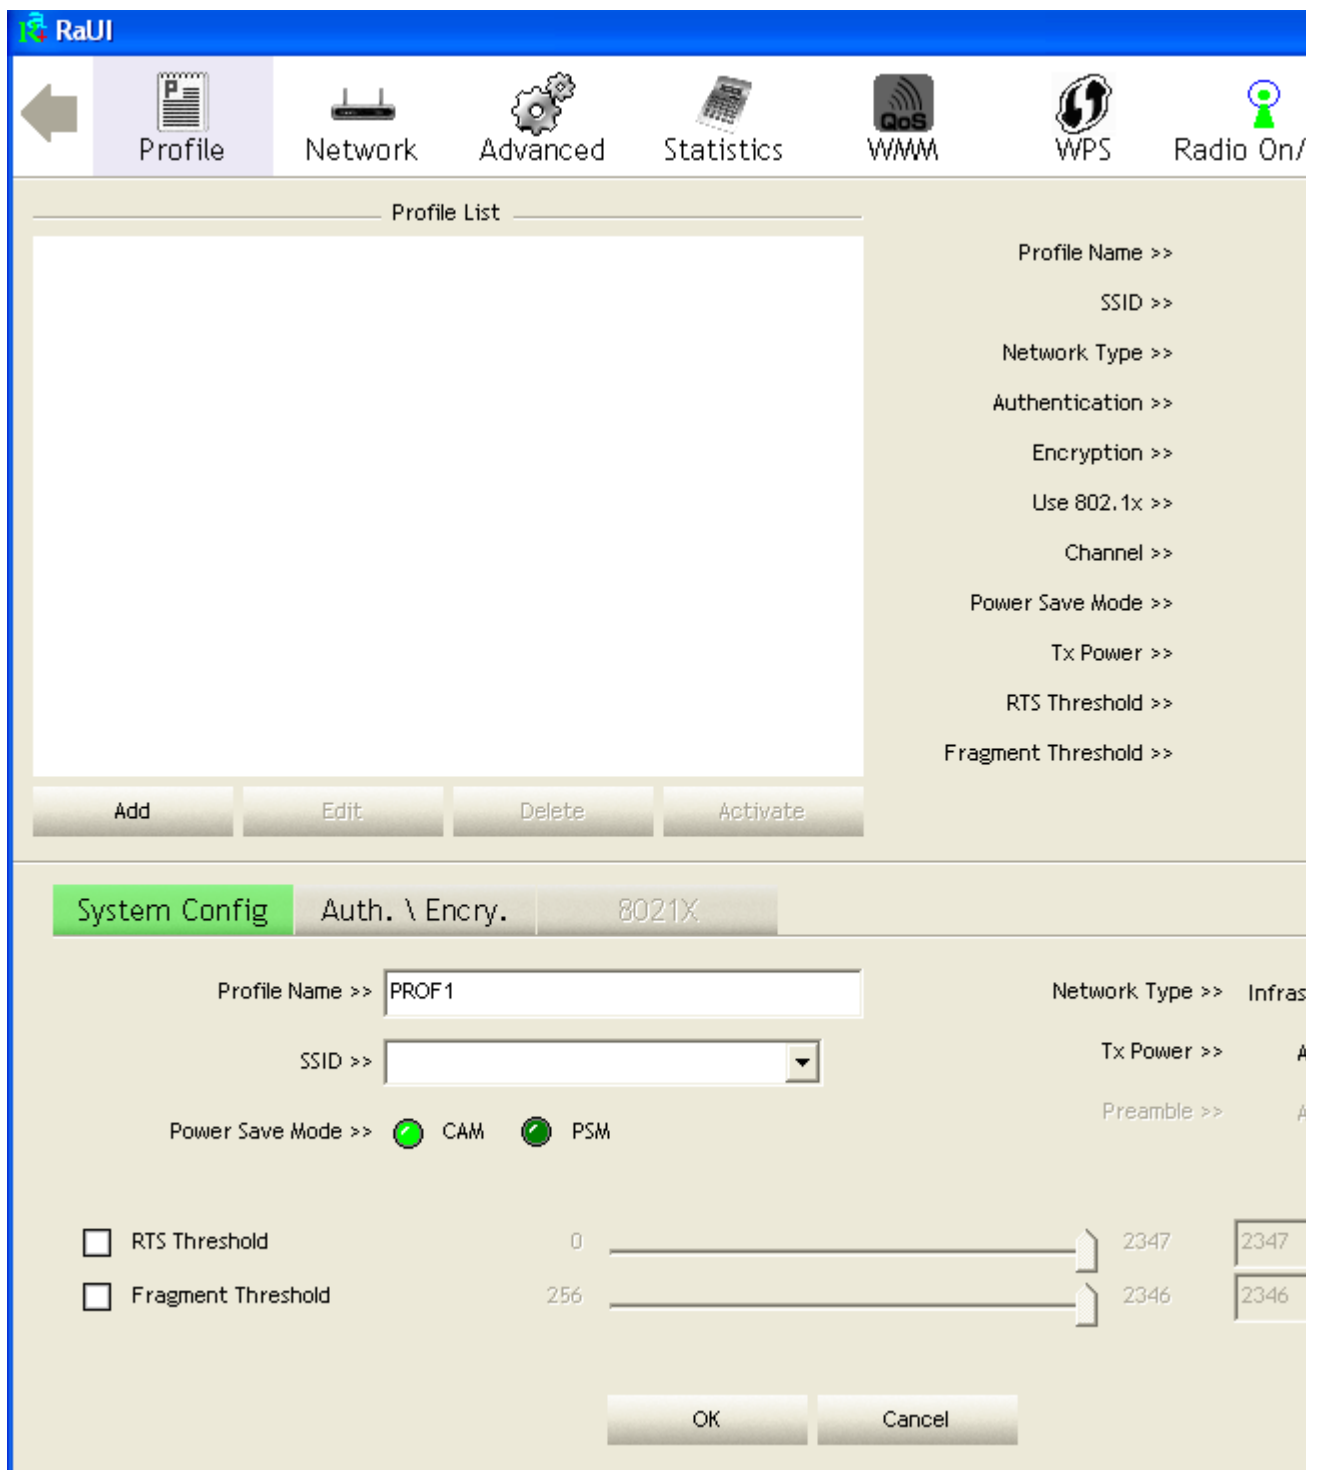

The image shows the RaUI Network Configuration window. The top menu bar includes icons for Profile, Network, Advanced, Statistics, WMM, WPS, and Radio On/Off. The 'Profile' tab is selected, showing a 'Profile List' table with columns for Name, SSID, Network Type, Authentication, Encryption, Use 802.1x, Channel, Power Save Mode, Tx Power, RTS Threshold, and Fragment Threshold. Below the table are 'Add', 'Edit', 'Delete', and 'Activate' buttons. The 'System Config' tab is active, showing configuration options for 'Auth. \ Encry.' and '8021X'. The 'Profile Name' is set to 'PROF1'. The 'SSID' is a dropdown menu. The 'Power Save Mode' has radio buttons for 'CAM' and 'PSM', both of which are selected. The 'RTS Threshold' and 'Fragment Threshold' are set to 0 and 256 respectively, with sliders and numeric input fields. The 'OK' and 'Cancel' buttons are at the bottom.

Profile List

Name	SSID	Network Type	Authentication	Encryption	Use 802.1x	Channel	Power Save Mode	Tx Power	RTS Threshold	Fragment Threshold

Buttons: Add, Edit, Delete, Activate

System Config | Auth. \ Encry. | 8021X

Profile Name >> PROF1

SSID >> [Dropdown]

Power Save Mode >> ☒ CAM ☒ PSM

RTS Threshold ☐ 0 [Slider] 2347 [2347]

Fragment Threshold ☐ 256 [Slider] 2346 [2346]

Buttons: OK, Cancel

③ Change profile name to what you want to connect. Pull down the ssid and select one intended AP. The AP list is the result of last Network.

RaUI

Profile Network Advanced Statistics WMM WPS Radio On/

Profile List

Profile Name >>
SSID >>
Network Type >>
Authentication >>
Encryption >>
Use 802.1x >>
Channel >>
Power Save Mode >>
Tx Power >>
RTS Threshold >>
Fragment Threshold >>

Add Edit Delete Activate

System Config Auth. \ Encry. 8021X

Profile Name >> PROF1 Network Type >> Infrase

SSID >>

Power Save Mode >>

☐ RTS Threshold

☐ Fragment Threshold

_Shiang_2860AP	000C43686016	
AlbertY-200	00AA2E82EB9E	
AP	0007404D0C7E	
AP1	00037F00D7A4	
APPA	0014A549F42F	
Belkin_N1_Wireless_281111	000C43281111	2347 2347
Broadcom	001018902EDA	2346 2346
BroadcomWPS	001018902E27	
ClaudeAP	000C766FC597	
Cobra	000A795C08BD	
DennisAP	000C43102718	
Fiona-Ap	000C43286021	

Preamble >>

4 Then, you can see the profile which you set appear in the profile list. Click "Activate". Activate the profile setting.

RaUI

Profile
 Network
 Advanced
 Statistics
 WMM
 WPS
 Radio On/

Profile List

PROF1
AP1

Add
Edit
Delete
Activate

Profile Name >> PROF1
SSID >> AP1
Network Type >> Infrastructure
Authentication >> Open
Encryption >> None
Use 802.1x >> NO
Channel >> 1
Power Save Mode >> CAM
Tx Power >> Auto
RTS Threshold >> 2347
Fragment Threshold >> 2346

Status >> AP1 <--> 00-03-7F-00-D7-A4
Extra Info >> Link is Up [TxPower:100%]
Channel >> 6 <--> 2437000 MHz
Authentication >> Open
Encryption >> NONE
Network Type >> Infrastructure
IP Address >> 192.168.5.60
Sub Mask >> 255.255.255.0
Default Gateway >> 192.168.5.254

Link Quality >> 100%
Signal Strength 1 >> 10
Signal Strength 2 >> 10
Signal Strength 3 >> 10
Noise Strength >> 26

Transmit
Link Speed >> 54.0 Mbps
Throughput >> 0.000 Mbps

Receive
Link Speed >> 54.0 Mbps
Throughput >> 0.033 Mbps

HT

BW >> n/a
GI >> n/a
MCS >> n/a
SNR0 >> n/a
SNR1 >> n/a

Network

Under the Network function, system will display the information of surrounding APs from last scan result. List informations include SSID, BSSID, Signal, Channel, Encryption algorithm, Authentication and Network type as Figure 2-3-1-1 shown.

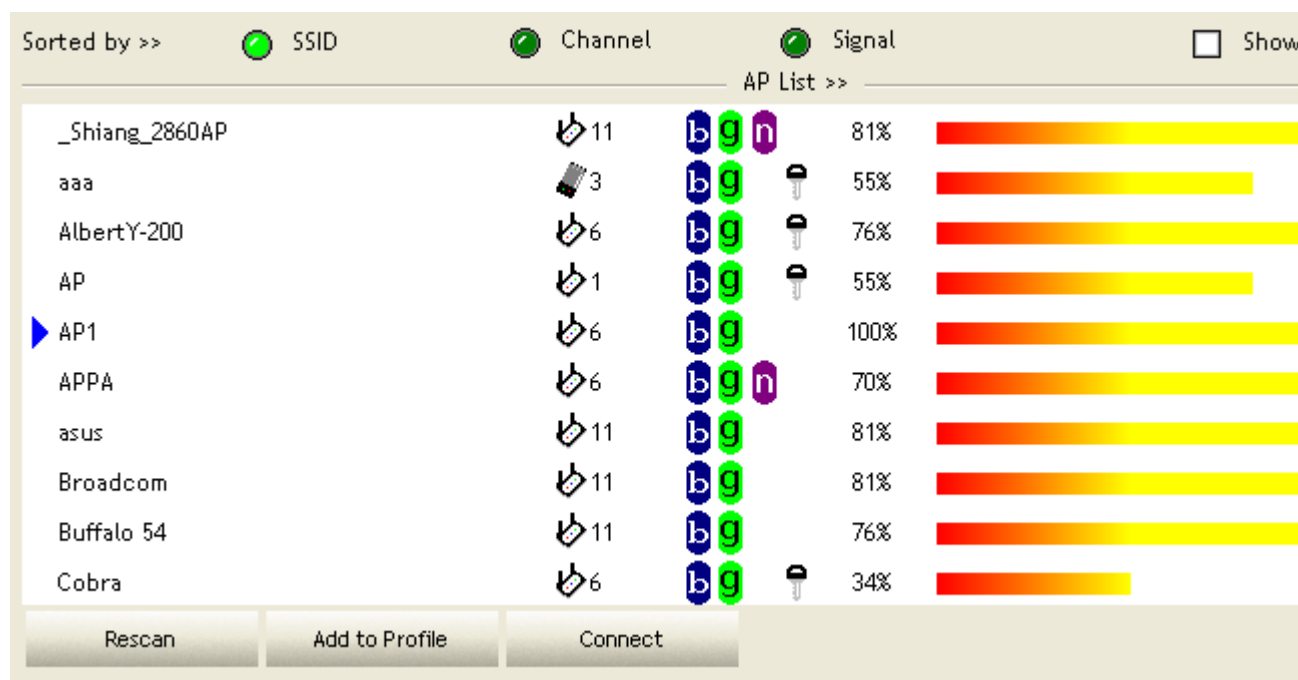


Figure 2-3-1-1 Network fuction

Definition of each field :

- 1 SSID : Name of BSS or IBSS network.
- 2 Network Type : Network type in use, Infrastructure for BSS, Ad-Hoc for IBSS network.
- 3 Channel : Channel in use.
- 4 Wireless Mode : AP support wireless mode. It may support 802.11a, 802.11b, 802.11g or 802.11n wireless mode.
- 5 Security-Enable : Whether AP provides security-enabled wireless network.
- 6 Signal : Receive signal strength of specified network.

Icons and buttons :



Indicate connection is successful.



Indicate network type is infrastructure mode.



Indicate network type is Ad-hoc mode.



Indicate security-enabled wireless network.



Indicate 802.11a wireless mode.



Indicate 802.11b wireless mode.




Indicate 802.11g wireless mode.




Indicate 802.11n wireless mode.




Indicate that AP list are sorted by SSID, Channel or Signal.



Command to connect to the selected network.



Issue an rescan command to wireless NIC to update information on surrounding wireless network.



Add the selected AP to Profile setting. It will bring up profile page and save user's setting to a new profile.



Show the information of Status Section.



Hide the information of Status Section.

Connected network :

- ① When RaUI first ran, it will select the best AP to connect automatically.
- ② If user wants to connect to other AP. He can click "Connect" button for the intended AP to make connection.
- ③ If the intended network has encryption other than "Not Use", RaUI will bring up the security page and let user input the appropriate information to make the connection. Please refer to example on how to fill the security information.

When you double click on the intended AP, you can see AP's detail information.

AP's detail information divide into three parts. They are General, WPS, CCX information and 802.11n ([802.11n button only exists for the AP supported N mode](#)). The introduction is as follow :

- ① General information contain AP's ssid, MAC address, authentication type, encryption type, channel, network type, beacon interval, signal strength and supported rates. It shows as Figure 2-3-1-2.

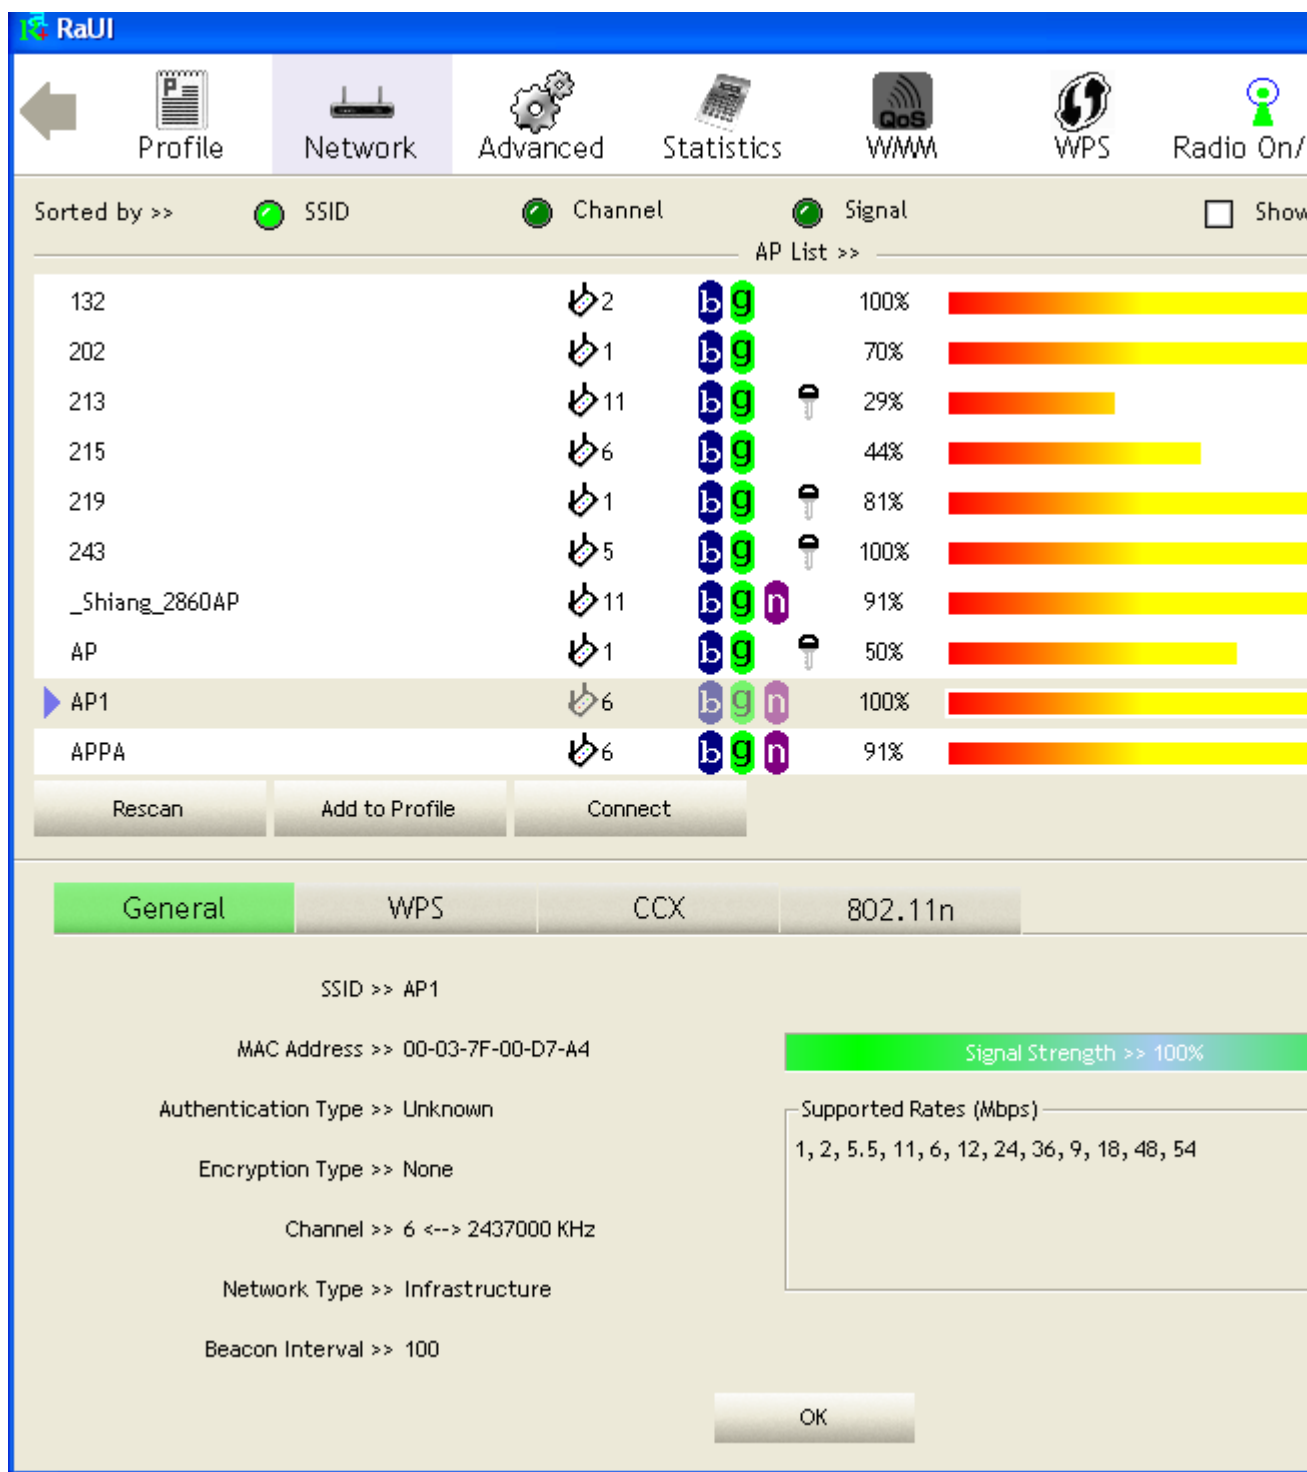


Figure 2-3-1-2 General information about AP's detail information

② WPS information contain authentication type, encryption type, config methods, device password id, selected registrar, state, version, AP setup locked, UUID-E and RF bands as Figure 2-3-1-3. The introduction indicates as follow :

① Authentication Type : There are three type of authentication modes supported by RaConfig. They are open, Shared, WPA-PSK and WPA system.

② Encryption Type : For open and shared authentication mode, the selection of encryption type are None and WEP. For WPA, WPA2, WPA-PSK and WPA2-PSK authentication mode, the encryption type supports both TKIP and AES.

③ Config Methods : Correspond to the methods the AP supports as an Enrollee for adding external Registrars. (a bitwise OR of values)

Value	Hardware Interface
0x0001	USBA (Flash Drive)
0x0002	Ethernet
0x0004	Label
0x0008	Display
0x0010	External NFC Token
0x0020	Integrated NFC Token
0x0040	NFC Interface
0x0080	Push Button
0x0100	Keypad

④ Device Password ID : Indicate the method or identifies the specific password that the selected Registrar intends to use. AP in PBC mode must indicate 0x0004 within two-minute Walk Time.

Value	Description
0x0000	Default (PIN)
0x0001	User-specified
0x0002	Rekey
0x0003	Display
0x0004	PushButton (PBC)
0x0005	Registrar-specified
0x0006-0x000F	Reserved

⑤ Selected Registrar : Indicate if the user has recently activated a Registrar to add an Enrollee. The values are "TRUE" and "FALSE".

⑥ State : The current configuration state on AP. The values are "Unconfigured" and "Configured".

⑦ Version : WPS specified version.

⑧ AP Setup Locked : Indicate if AP has entered a setup locked state.

⑨ UUID-E : The universally unique identifier (UUID) element generated by the Enrollee. There is a value. It is 16 bytes.

⑩ RF Bands : Indicate all RF bands available on the AP. A dual-band AP must provide it. The values are "2.4GHz" and "5GHz".

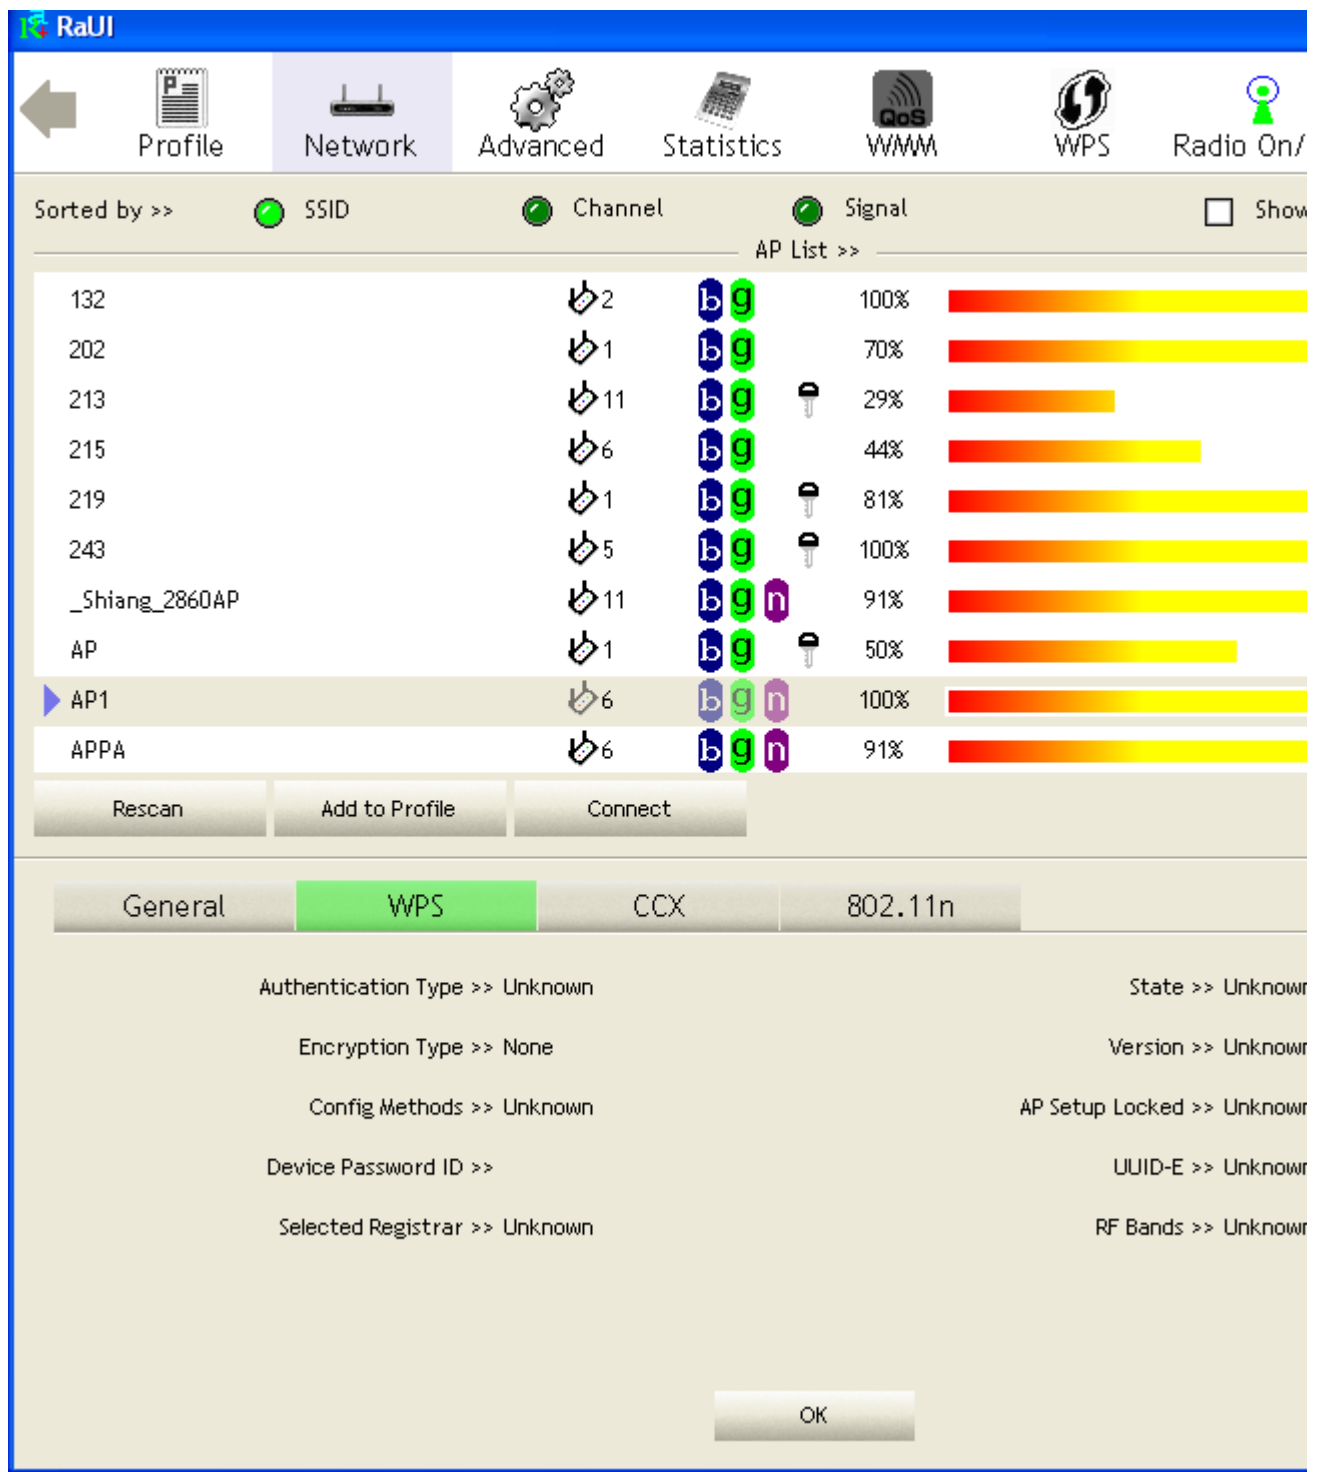


Figure 2-3-1-3 WPS information about AP's detail information

③ CCX information contains CCKM, Cmic and Ckip information. It shows as Figure 2-3-1-4.

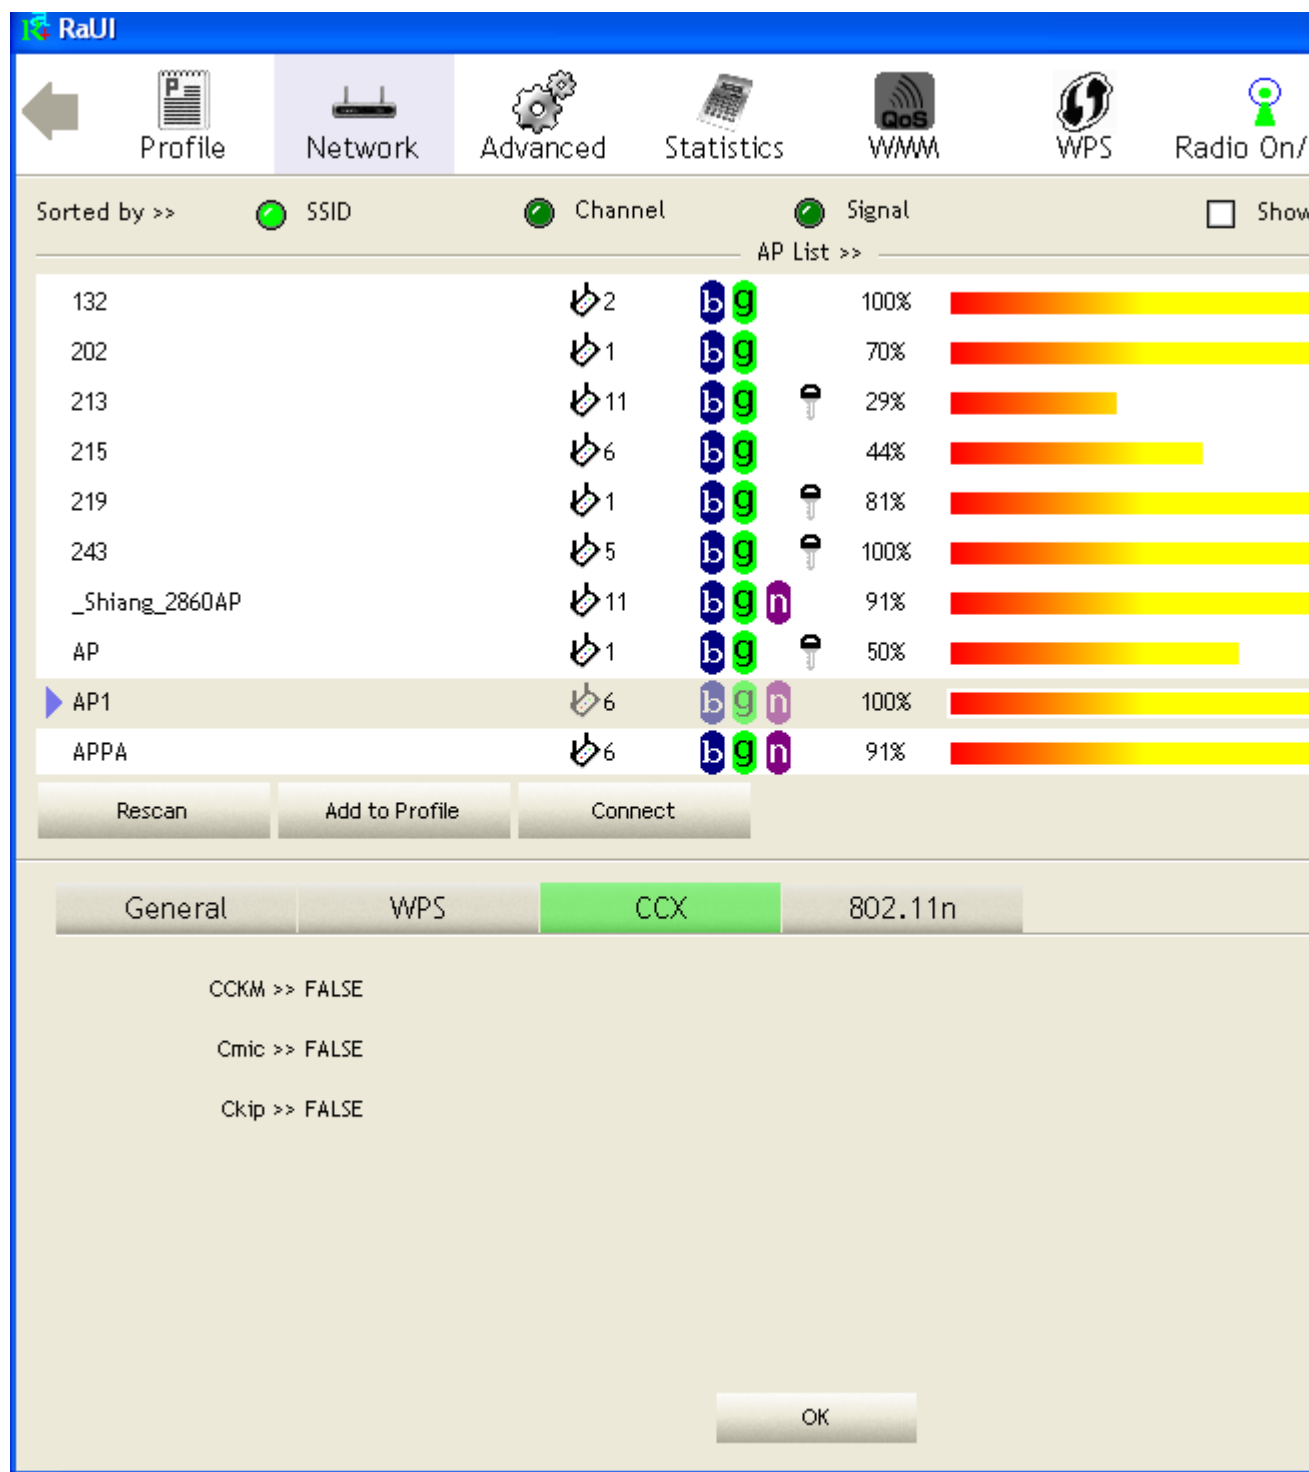


Figure 2-3-1-4 CCX information about AP's detail information

④ 802.11n information contains some related 802.11n information. It shows as Figure 2-3-1-5.

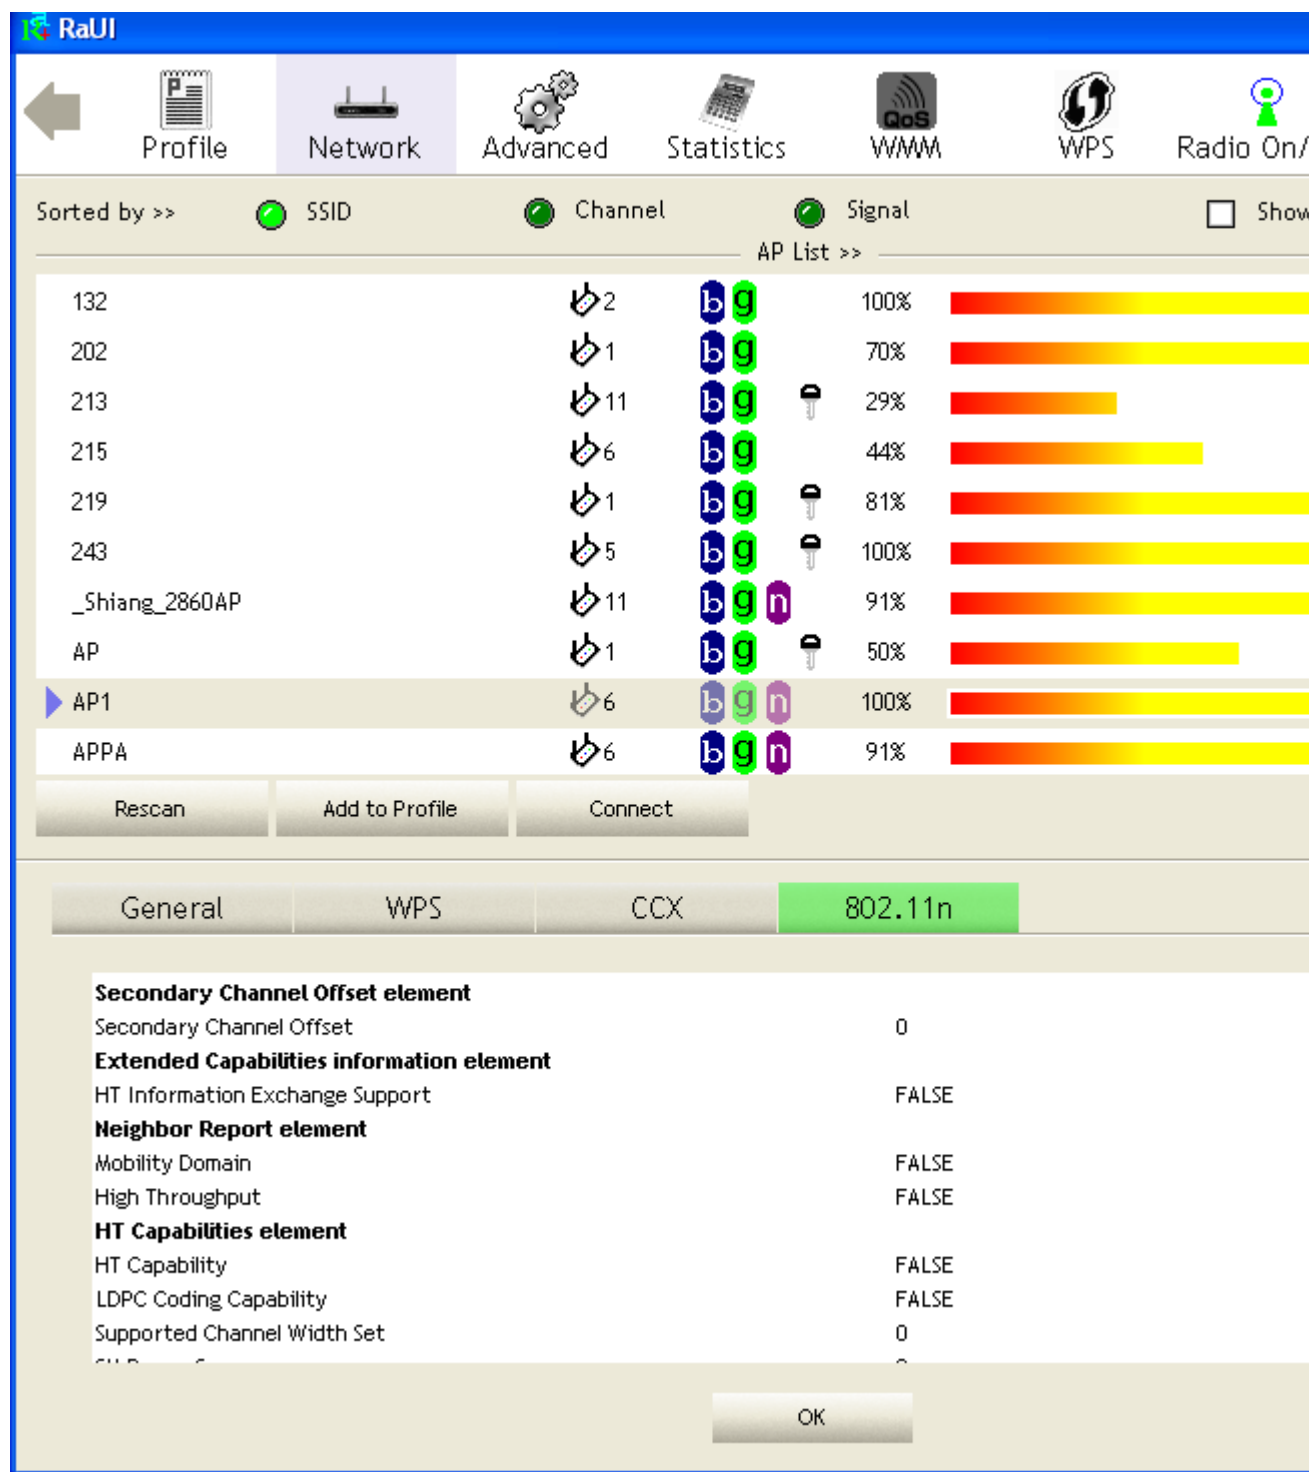


Figure 2-3-1-5 802.11n information

Example on Adding Profile in Network

- 1 Select the intended network from AP list in Network function.

The screenshot displays the RaUI Network function interface. At the top, there are navigation tabs: Profile, Network (selected), Advanced, Statistics, WMM, WPS, and Radio On/Off. Below the tabs, there are sorting options: Sorted by >> SSID, Channel, and Signal. A red box highlights the 'AP List' table, which contains the following data:

AP Name	Channel	Signal	Link Quality
AlbertY-200	6	60%	100%
AP	1	70%	100%
AP1	6	100%	100%
Broadcom	11	70%	100%
BroadcomWPS	1	100%	100%
DennisAP	6	76%	100%
Fiona-Ap	11	44%	100%
ISSI-3F-asus11b	3	20%	100%
knilar	8	60%	100%
NB27-PC_Network	6	81%	100%

Below the table are three buttons: Rescan, Add to Profile, and Connect. The 'Add to Profile' button is highlighted. Below the buttons, there is a section for 'Status >> AP1 <--> 00-03-7F-00-D7-A4'. This section contains various network details:

- Extra Info >> Link is Up [TxPower:100%]
- Channel >> 6 <--> 2437000 MHz
- Authentication >> Unknown
- Encryption >> None
- Network Type >> Infrastructure
- IP Address >> 192.168.5.60
- Sub Mask >> 255.255.255.0
- Default Gateway >> 192.168.5.254

On the right side of the status section, there are several performance metrics:

- Link Quality >> 100%
- Signal Strength 1 >> 10
- Signal Strength 2 >> 10
- Signal Strength 3 >> 10
- Noise Strength >> 26

Below these metrics, there are sections for 'Transmit' and 'Receive' performance:

- Transmit: Link Speed >> 54.0 Mbps, Throughput >> 0.000 Mbps
- Receive: Link Speed >> 48.0 Mbps, Throughput >> 0.104 Mbps

- 2 Click "Add to Profile".


The screenshot shows the RaUI interface with the 'Network' tab selected. The top navigation bar includes icons for Profile, Network, Advanced, Statistics, WMM, WPS, and Radio On/Off. Below the navigation bar, there are filters for 'Sorted by' (SSID, Channel, Signal) and a 'Show' checkbox. The main area displays a table of available APs. The 'AP1' entry is selected and highlighted in blue. Below the table, there are three buttons: 'Rescan', 'Add to Profile' (which is highlighted with a red rectangle), and 'Connect'. The bottom section of the interface shows detailed status and configuration for the selected AP1, including MAC address, link status, channel, authentication, encryption, network type, IP address, and various performance metrics like link quality, signal strength, and throughput.

AP Name	Channel	Signal	Link Quality
AlbertY-200	6	60%	100%
AP	1	70%	100%
AP1	6	100%	100%
Broadcom	11	70%	100%
BroadcomWPS	1	100%	100%
DennisAP	6	76%	100%
Fiona-Ap	11	44%	100%
ISSI-3F-asus11b	3	20%	100%
knilar	8	60%	100%
NB27-PC_Network	6	81%	100%

AP1 Details:

- Status >> AP1 <--> 00-03-7F-00-D7-A4
- Extra Info >> Link is Up [TxPower:100%]
- Channel >> 6 <--> 2437000 MHz
- Authentication >> Unknown
- Encryption >> None
- Network Type >> Infrastructure
- IP Address >> 192.168.5.60
- Sub Mask >> 255.255.255.0
- Default Gateway >> 192.168.5.254
- HT
- BW >> n/a
- GI >> n/a
- MCS >> n/a
- SNR0 >> n/a
- SNR1 >> n/a
- Link Quality >> 100%
- Signal Strength 1 >> 10
- Signal Strength 2 >> 10
- Signal Strength 3 >> 10
- Noise Strength >> 26
- Transmit
 - Link Speed >> 54.0 Mbps
 - Throughput >> 0.000 Mbps
- Receive
 - Link Speed >> 48.0 Mbps
 - Throughput >> 0.104 Mbps

③ System will pop up Add Profile windows. You can change profile name which you like most.

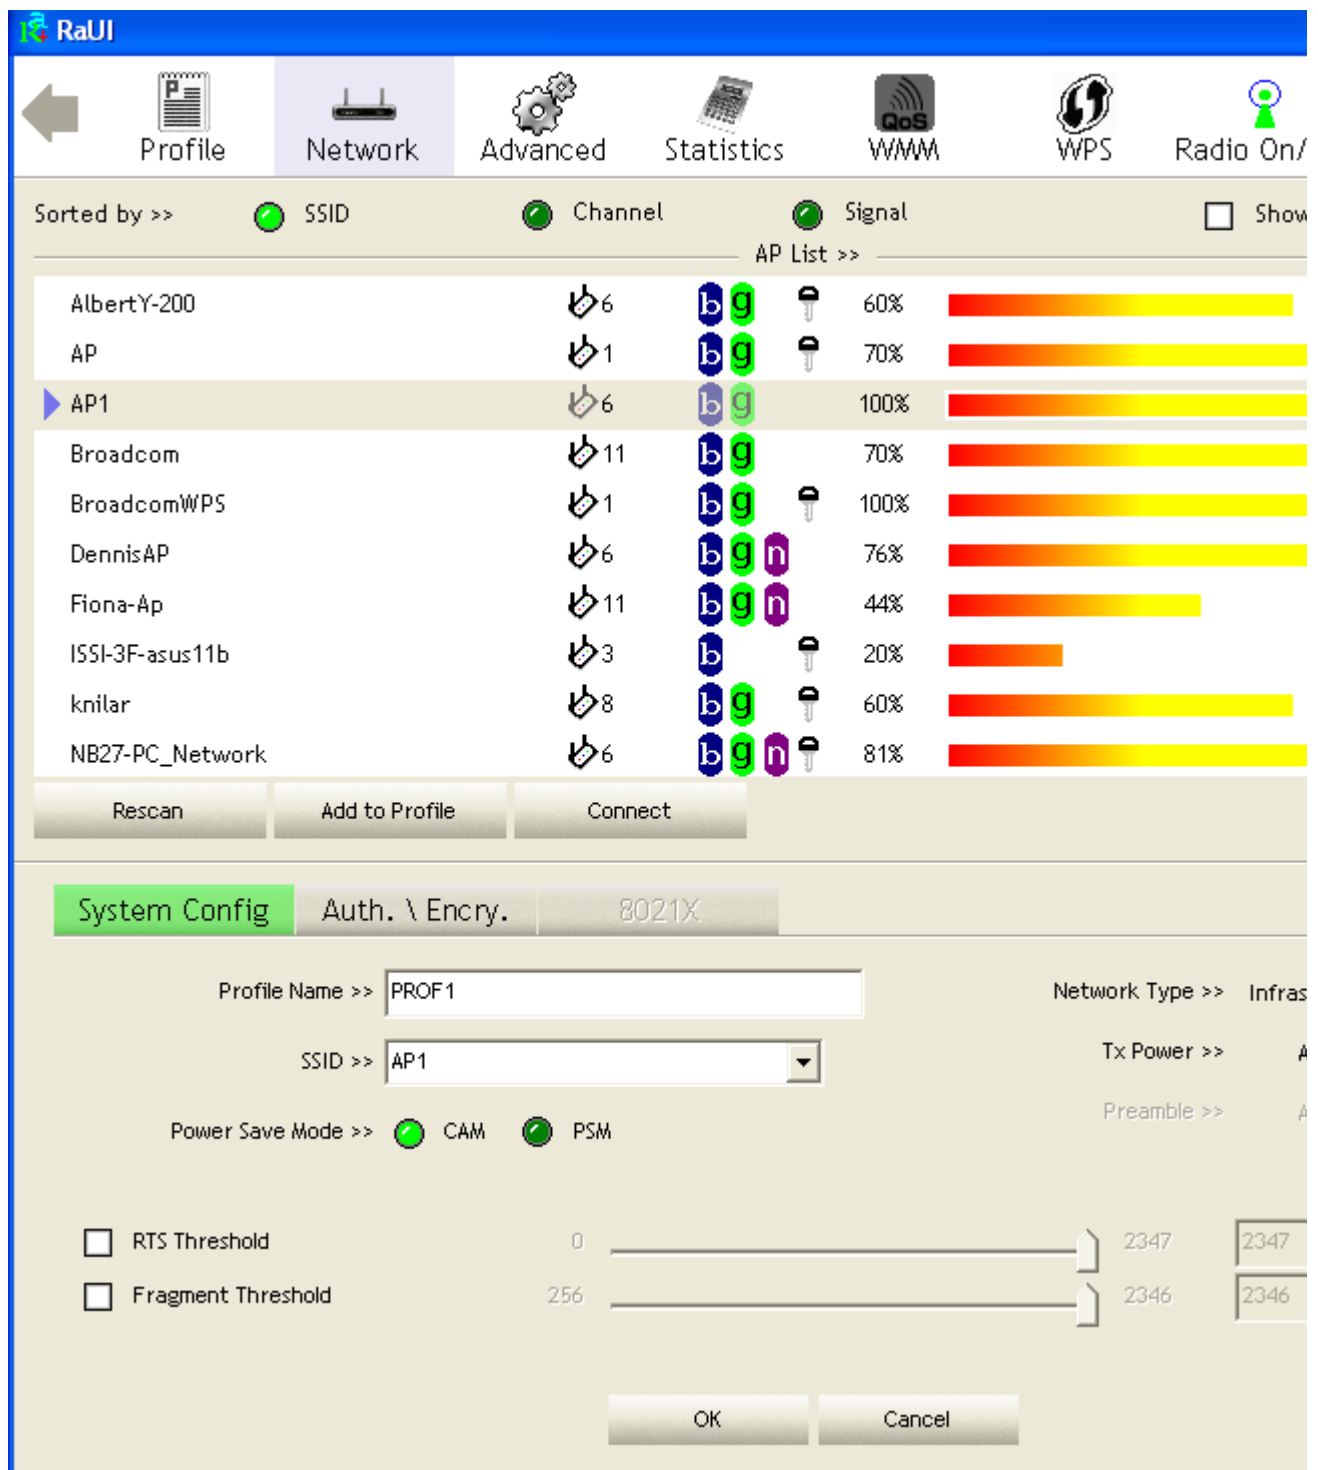

4 Then, you can see the profile which you set appear in the profile list. Click "Activate". Activate the profile setting.

RaUI

Profile
 Network
 Advanced
 Statistics
 WMM
 WPS
 Radio On/

Profile List

PROF1	AP1	
-------	-----	--

Add
Edit
Delete
Activate

Profile Name >> PROF1
SSID >> AP1
Network Type >> Infrastructure
Authentication >> Open
Encryption >> None
Use 802.1x >> NO
Channel >> 6
Power Save Mode >> CAM
Tx Power >> Auto
RTS Threshold >> 2347
Fragment Threshold >> 2346

Status >> AP1 <--> 00-03-7F-00-D7-A4
Extra Info >> Link is Up [TxPower:100%]
Channel >> 6 <--> 2437000 MHz
Authentication >> Unknown
Encryption >> None
Network Type >> Infrastructure
IP Address >> 192.168.5.60
Sub Mask >> 255.255.255.0
Default Gateway >> 192.168.5.254

HT

BW >> n/a
SNR0 >> n/a
GI >> n/a
MCS >> n/a
SNR1 >> n/a

Link Quality >> 100%
Signal Strength 1 >> 10
Signal Strength 2 >> 10
Signal Strength 3 >> 10
Noise Strength >> 26

Transmit

Link Speed >> 54.0 Mbps
Throughput >> 0.000 Mbps

Receive

Link Speed >> 54.0 Mbps
Throughput >> 0.092 Mbps

Advanced

Figure 2-4 shows Advance function of RaUI.

Wireless mode >> 802.11 A/B/G/N mix

☐ Enable CCX (Cisco Compatible eXtensions)

☐ Turn on CCKM

☐ Enable Radio Measurements

☐ Non-Serving Channel Measurements limit 250

☐ Enable TX Burst

☐ Enable TCP Window Size

☐ Fast Roaming at -70 dBm

☐ Show Authentication Status Dialog

Select Your Country Region Code

11 B/G >> 0: CH1-11

11 A >> 7: CH 36,40,44,48,52,56,60,64,100

Apply

Figure 2-4 Advance function

❶ Wireless mode : Select wireless mode. 802.11 B only, 802.11 A only, 802.11 B/G mix, 802.11 B/G/N mix, 802.11 A/B/G mix, and 802.11 A/B/G/N mix modes are supported. (802.11 A/B/G mix selection item only exists for A/B/G adapter ; 802.11 B/G/N mix selection item only exists for B/G/N adapter ; 802.11 A/B/G/N mix selection item only exists for A/B/G/N adapter)

❷ Wireless Protection : User can choose from Auto, On, and Off. (only 802.11n adapter don't support.)

❶ Auto : STA will dynamically change as AP announcement.

❷ On : Always send frame with protection.

❸ Off : Always send frame without protection.

❸ TX Rate : Manually force the Transmit using selected rate. Default is auto. (802.11n wireless card don't support TX Rate now)

❹ Enable TX Burst : Ralink's proprietary frame burst mode.

❺ Enable TCP Window Size : Enhance throughput.

❻ Fast Roaming at : fast to roaming, setup by transmit power.

❼ Select Your Country Region Code : eight countries to choose. Country channel list : Country channel list. (11A ListBox only shows for A/B/G adapter.)

❽ Show Authentication Status Dialog : When you connect AP with authentication, choose

whether show "Authentication Status Dialog" or not. Authentication Status Dialog display the process about 802.1x authentication.

9 Enable CCX (Cisco Compatible eXtensions) : support Cisco Compatible Extensions function.

1 LEAP turn on CCKM.

2 Enable Radio Measurement : can channel measurement every 0~2000 milliseconds.

10 Apply the above changes.

Icons and buttons:



Show the information of Status Section.



Hide the information of Status Section.

Statistics

Statistics page displays the detail counter information based on 802.11 MIB counters. This page translates that MIB counters into a format easier for user to understand. Figure 2-5-1 shows the detail page layout.

Transmit		Receive
Frames Transmitted Successfully	=	
Frames Retransmitted Successfully	=	
Frames Fail To Receive ACK After All Retries	=	
RTS Frames Successfully Receive CTS	=	
RTS Frames Fail To Receive CTS	=	

Reset Counter

Figure 2-5-1 Statistics function

Transmit Statistics :

Transmit		Receive
Frames Transmitted Successfully	=	
Frames Retransmitted Successfully	=	
Frames Fail To Receive ACK After All Retries	=	
RTS Frames Successfully Receive CTS	=	
RTS Frames Fail To Receive CTS	=	

Reset Counter

- ① Frames Transmitted Successfully : Frames successfully sent.
- ② Frames Fail To Receive ACK After All Retries : Frames failed transmit after hitting retry limit.
- ③ RTS Frames Successfully Receive CTS : Successfully receive CTS after sending RTS frame.

- 4 RTS Frames Fail To Receive CTS : Failed to receive CTS after sending RTS.
- 5 Frames Retransmitted Successfully : Successfully retransmitted frames numbers.
- 6 Reset counters to zero.

Receive Statistics :

Transmit	Receive
Frames Received Successfully	=
Frames Received With CRC Error	=
Frames Dropped Due To Out-of-Resource	=
Duplicate Frames Received	=

Reset Counter

- 1 Frames Received Successfully : Frames received successfully.
- 2 Frames Received With CRC Error : Frames received with CRC error.
- 3 Frames Dropped Due To Out-of-Resource : Frames dropped due to resource issue.
- 4 Duplicate Frames Received : Duplicate received frames.
- 5 Reset counters to zero.

Icons and buttons:



Show the information of Status Section.



Hide the information of Status Section.

WMM

Figure 2-6-1 shows WMM function of RaUI. It involves "WMM Enable", "WMM - Power Save Enable" and DLS setup. The introduction indicates as follow :

Figure 2-6-1 WMM function

- ① WMM Enable : Enable Wi-Fi Multi-Media. The setting method follows [Section 2-6-2](#).
- ② WMM - Power Save Enable : Enable WMM Power Save. The setting method follows [Section 2-6-3](#).
- ③ Direct Link Setup Enable : Enable DLS (Direct Link Setup). The setting method follows [Section 2-6-4](#).

Icons and buttons:



Show the information of Status Section.



Hide the information of Status Section.

Example to Configure to Enable DLS (Direct Link Setup)

- 1 Click "Direct Link Setup Enable"

WMM Setup Status

WMM >> Enabled Power Save >> Disabled Direct Link Setup >> Enabled

☒ WMM Enable

☐ WMM - Power Save Enable


☐ AC_BK ☐ AC_BE ☐ AC_VI ☐ AC_VO

☒ Direct Link Setup Enable

MAC Address >> Timeout Value >> sec

Ap Tear

- 2 Change to "Network" function. And add a AP that supports DLS features to a Profile. The result will look like the below figure in Profile page.

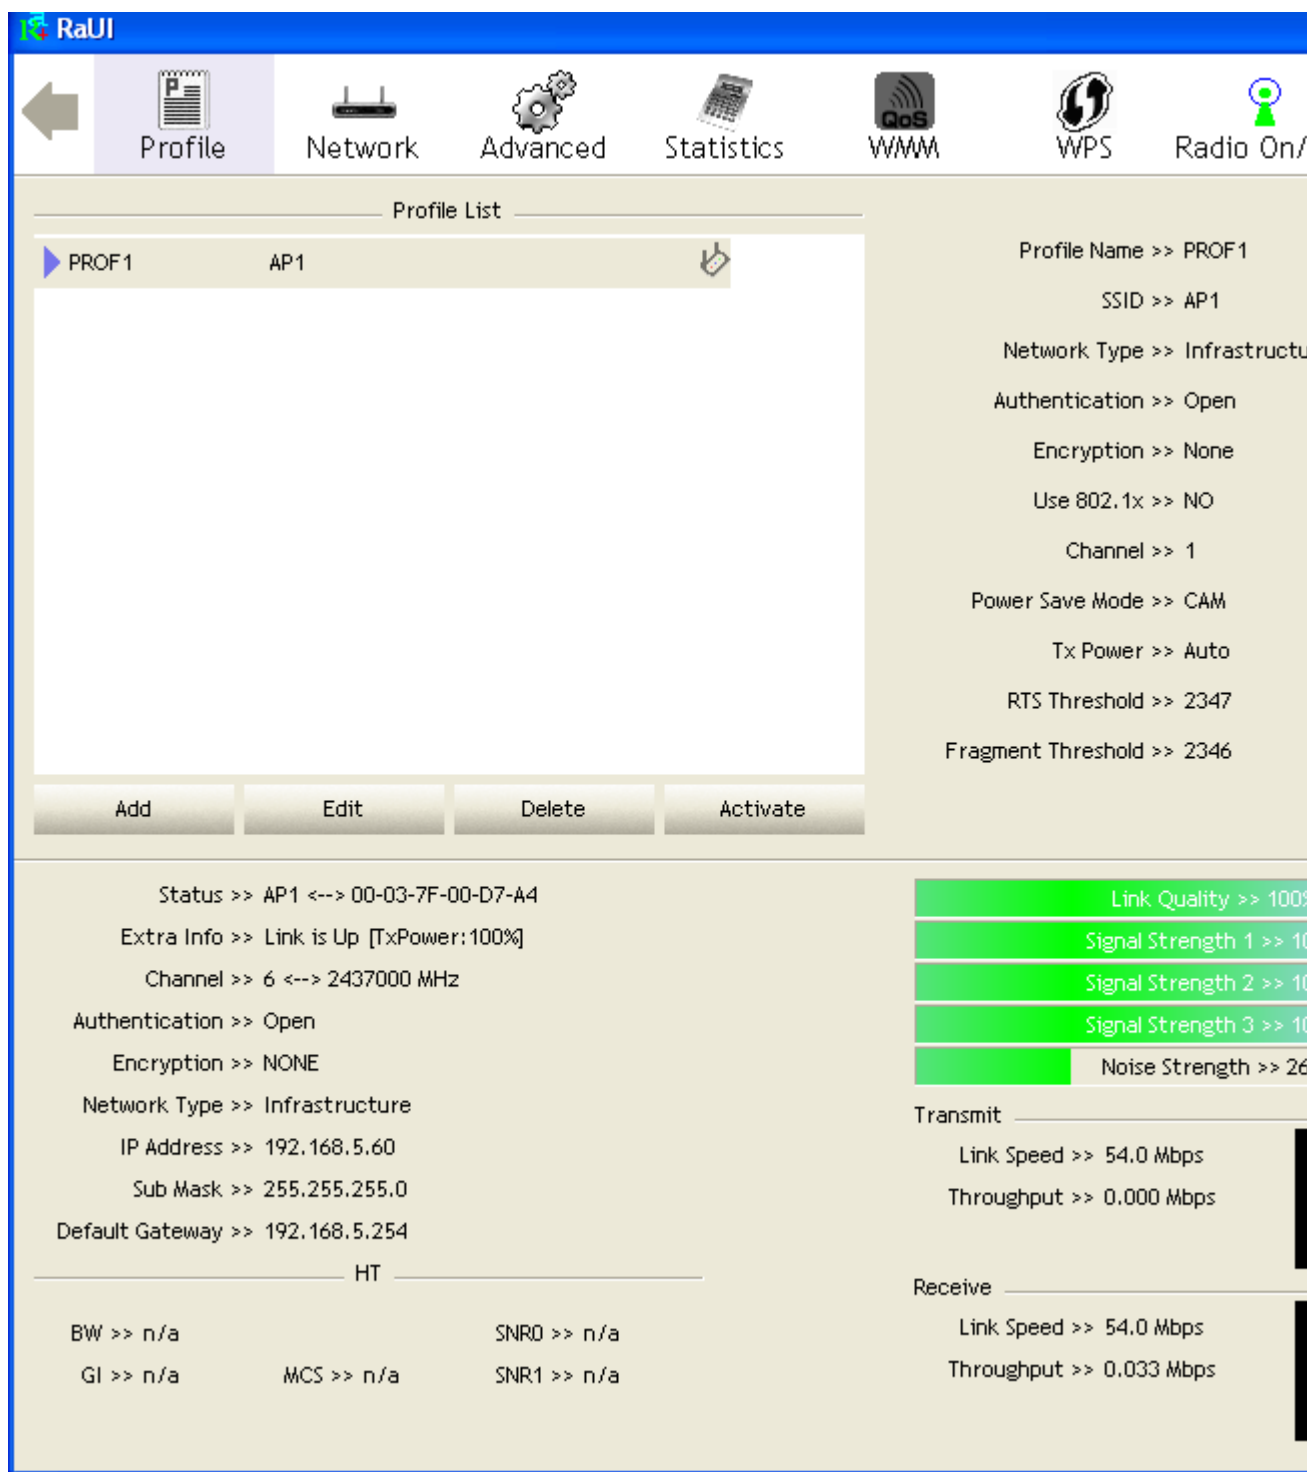

The setting of DLS indicates as follow :

❶ Fill in the blanks of Direct Link with MAC Address of STA. The STA must conform to two conditions as follow :

1. Connect with the same AP that support DLS features.
2. Have to enable DLS.

WMM Setup Status

WMM >> Enabled Power Save >> Disabled Direct Link

☒ WMM Enable

☐ WMM - Power Save Enable

☐ AC_BK ☐ AC_BE ☐ AC_VI ☐ AC_VO

☒ Direct Link Setup Enable

MAC Address >> 00 0c 43 28 60 00 Timeout Value >> 600 sec

Ap Tear

② Timeout Value represents that it disconnect automatically after some seconds. The value is integer. The integer must be between 0~65535. It represents that it always connects if the value is zero. Default value of Timeout Value is 60 seconds.

WMM Setup Status

WMM >> Enabled Power Save >> Disabled Direct Link

☒ WMM Enable

☐ WMM - Power Save Enable

☐ AC_BK ☐ AC_BE ☐ AC_VI ☐ AC_VO

☒ Direct Link Setup Enable

MAC Address >> 00 0c 43 28 60 00 Timeout Value >> 600 sec

Ap Tear

③ Click "Apply" button. The result will look like the below figure.

WMM Setup Status

WMM >> Enabled Power Save >> Disabled Direct Lin

☒ WMM Enable

☐ WMM - Power Save Enable

☐ AC_BK ☐ AC_BE ☐ AC_VI ☐ AC_VO

☒ Direct Link Setup Enable

MAC Address >> 00 0c 43 28 60 00 Timeout Value >> 600 sec

00-0C-43-28-60-00	600

Ap
Tear

Describe "DLS Status" as follow :

① As the up figure, after configuring DLS successfully, show MAC address of the opposite side and Timeout Value of setting in "DLS Status". In "DLS Status" of the opposite side, it shows MAC address of myself and Timeout Value of setting.

② Display the values of "DLS Status" to "Direct Link Setup" as follow :

1. In "DLS Status" select a direct link STA what you want to show it's values in "Direct Link Setup".

WMM Setup Status

WMM >> Enabled Power Save >> Disabled Direct Lin

☒ WMM Enable

☐ WMM - Power Save Enable

☐ AC_BK ☐ AC_BE ☐ AC_VI ☐ AC_VO

☒ Direct Link Setup Enable

MAC Address >> Timeout Value >> 60 sec

00-0C-43-28-60-00	600

Ap
Tear

2. Double click. And the result will look like the below figure.

WMM Setup Status

WMM >> Enabled Power Save >> Disabled Direct Lin

☒ WMM Enable

☐ WMM - Power Save Enable

☐ AC_BK ☐ AC_BE ☐ AC_VI ☐ AC_VO

☒ Direct Link Setup Enable

MAC Address >> 00 0c 43 28 60 00 Timeout Value >> 600 sec

00-0C-43-28-60-00	600

Ap
Tear

3 Disconnect Direct Link Setup as follow :

1. Select a direct link STA.

WMM Setup Status

WMM >> Enabled Power Save >> Disabled Direct Lin

☒ WMM Enable

☐ WMM - Power Save Enable

☐ AC_BK ☐ AC_BE ☐ AC_VI ☐ AC_VO

☒ Direct Link Setup Enable

MAC Address >> 00 0c 43 28 60 00 Timeout Value >> 600 sec

00-0C-43-28-60-00	600

Ap
Tear

2. Click "Tear Down" button. The result will look like the below figure.

WMM Setup Status

WMM >> EnabledPower Save >> DisabledDirect Lin

☒ WMM Enable

☐ WMM - Power Save Enable

☐ AC_BK☐ AC_BE☐ AC_VI☐ AC_VO

☒ Direct Link Setup Enable


MAC Address >>000c43286000Timeout Value >>600sec

ApTear

Example to Configure to Enable Wi-Fi Multi-Media

If you want to use "WMM-Power Save" or "Direct Link" you must enable WMM. The setting method of enabling WMM indicates as follows:

- 1 Click "WMM Enable".

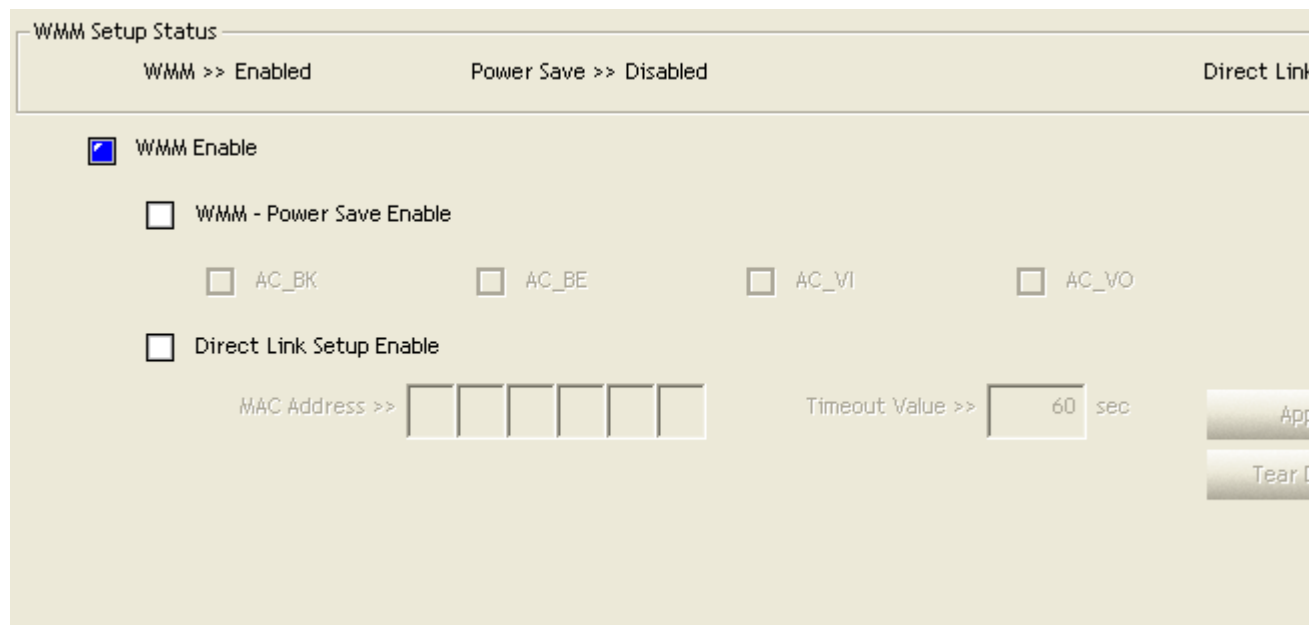

The image shows a "WMM Setup Status" configuration window. At the top, it displays the current status: "WMM >> Enabled", "Power Save >> Disabled", and "Direct Link". Below this, there are several checkboxes and input fields. The "WMM Enable" checkbox is checked. Below it, the "WMM - Power Save Enable" checkbox is unchecked. Under "WMM - Power Save Enable", there are four unchecked checkboxes: "AC_BK", "AC_BE", "AC_VI", and "AC_VO". Below these, the "Direct Link Setup Enable" checkbox is unchecked. At the bottom, there is a "MAC Address >>" field with six empty boxes, and a "Timeout Value >>" field with the value "60" and the unit "sec". On the right side, there are two buttons: "Apply" and "Tear Down".

- 2 Change to "Network" function. And add a AP that supports WMM features to a Profile. The result will look like the below figure in Profile page.

RaUI

Profile
 Network
 Advanced
 Statistics
 WMM
 WPS
 Radio On/

Profile List

▶ PROF1
AP1

Add
Edit
Delete
Activate

Profile Name >> PROF1
SSID >> AP1
Network Type >> Infrastructure
Authentication >> Open
Encryption >> None
Use 802.1x >> NO
Channel >> 1
Power Save Mode >> CAM
Tx Power >> Auto
RTS Threshold >> 2347
Fragment Threshold >> 2346

Status >> AP1 <--> 00-03-7F-00-D7-A4
Extra Info >> Link is Up [TxPower:100%]
Channel >> 6 <--> 2437000 MHz
Authentication >> Open
Encryption >> NONE
Network Type >> Infrastructure
IP Address >> 192.168.5.60
Sub Mask >> 255.255.255.0
Default Gateway >> 192.168.5.254

Link Quality >> 100%
Signal Strength 1 >> 10
Signal Strength 2 >> 10
Signal Strength 3 >> 10
Noise Strength >> 26

Transmit
Link Speed >> 54.0 Mbps
Throughput >> 0.000 Mbps

Receive
Link Speed >> 54.0 Mbps
Throughput >> 0.033 Mbps

HT

BW >> n/a
GI >> n/a
MCS >> n/a
SNR0 >> n/a
SNR1 >> n/a

Example to Configure to Enable WMM Power Save

- 1 Click "WMM-Power Save Enable".

WMM Setup Status

WMM >> Enabled Power Save >> Disabled Direct Link Setup >> Disabled

☒ WMM Enable

☒ WMM - Power Save Enable

☐ AC_BK ☐ AC_BE ☐ AC_VI ☐ AC_VO

☐ Direct Link Setup Enable

MAC Address >> Timeout Value >> sec

Apply Tear Down

- 2 Please select which ACs you want to enable. The setting of enabling WMM-Power Save is successfully.

WMM Setup Status

WMM >> Enabled Power Save >> Enabled Direct Link Setup >> Disabled

☒ WMM Enable

☒ WMM - Power Save Enable

☒ AC_BK ☐ AC_BE ☐ AC_VI ☐ AC_VO

☐ Direct Link Setup Enable

MAC Address >> Timeout Value >> sec

Apply Tear Down

WPS

Figure 2-7-1 shows WPS function of RaUI. The introduction indicates as follow:

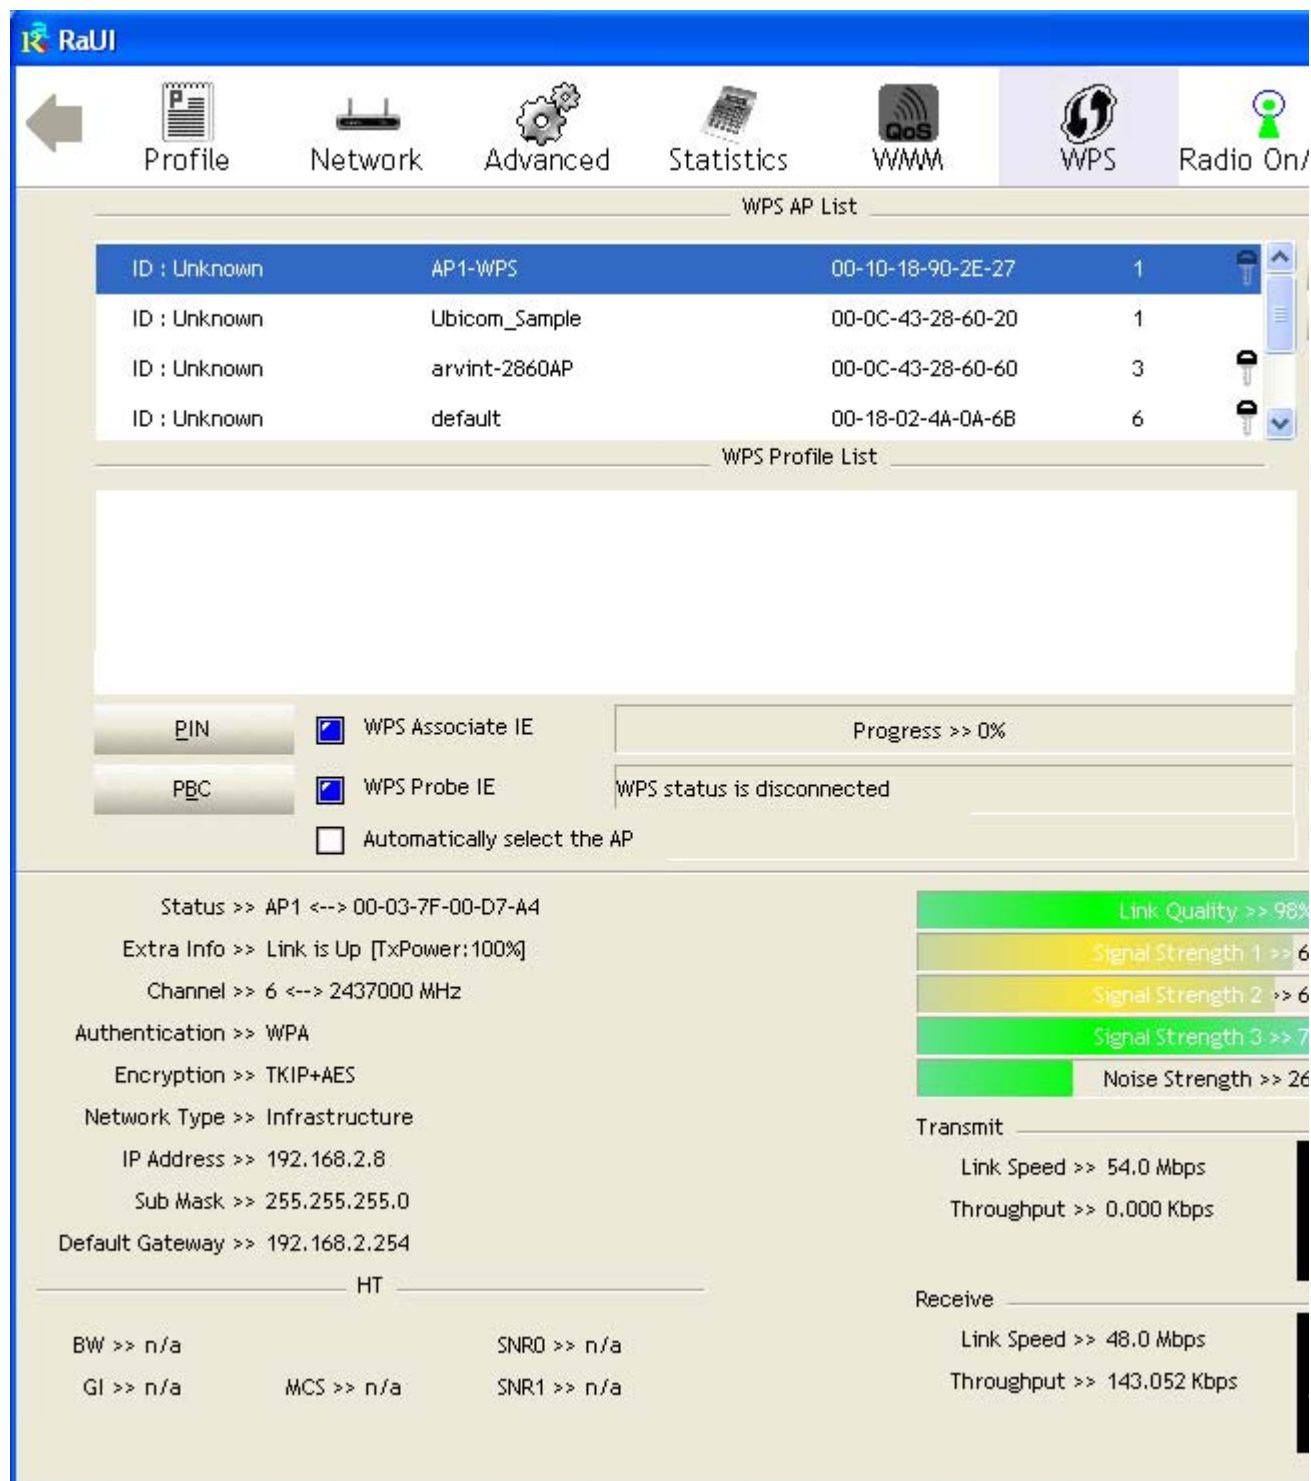


Figure 2-7-1 WPS function

❶ **WPS Configuration** : The primary goal of Wi-Fi Protected Setup (Wi-Fi Simple Configuration) is to simplify the security setup and management of Wi-Fi networks. Ralink STA as an Enrollee or external Registrar supports the configuration setup using PIN configuration method or PBC configuration method through an internal or external Registrar.

② WPS AP List : Display the information of surrounding APs with WPS IE from last scan result. List information include SSID, BSSID, Channel, ID (Device Password ID), Security-Enabled.

③ Rescan : Issue a rescan command to wireless NIC to update information on surrounding wireless network.

④ Information : Display the information about WPS IE on the selected network. List information include Authentication Type, Encryption Type, Config Methods, Device Password ID, Selected Registrar, State, Version, AP Setup Locked, UUID-E and RF Bands. It's detail follows [WPS Information on AP](#).

⑤ PIN Code : 8-digit numbers. It is required to enter PIN Code into Registrar using PIN method. When STA is Enrollee, you can use "Renew" button to re-generate new PIN Code.

⑥ Config Mode : Our station role-playing as an Enrollee or an external Registrar.

⑦ Table of Credentials: Display all of credentials got from the Registrar. List information include SSID, MAC Address, Authentication and Encryption Type. If STA Enrollee, credentials are created as soon as each WPS success. If STA Registrar, RaUI creates a new credential with WPA2-PSK/AES/64Hex-Key and doesn't change until next switching to STA Registrar.

⑧ Control items on credentials

1. Detail : Information about Security and Key in the credential.

2. Connect : Command to connect to the selected network inside credentials. The active selected credential is as like as the active selected Profile.

3. Rotate : Command to rotate to connect to the next network inside credentials.

4. Disconnect : Stop WPS action and disconnect this active link. And then select the last profile at the Profile Page of RaUI if exist. If there is an empty profile page, the driver will select any non-security AP.

5. Export Profile: Export all credentials to Profile.

6. Delete : Delete an existing credential. And then select the next credential if exist. If there is an empty credential, the driver will select any non-security AP.

⑨ PIN : Start to add to Registrar using PIN configuration method. If STA Registrar, remember that enter PIN Code read from your Enrollee before starting PIN.

⑩ PBC : Start to add to AP using PBC configuration method.

**When you click PIN or PBC, please don't do any rescan within two-minute connection. If you want to abort this setup within the interval, restart PIN/PBC or press Disconnect to stop WPS action.*

⑪ WPS associate IE : Send the association request with WPS IE during WPS setup. It is optional for STA.

12 WPS probe IE : Send the probe request with WPS IE during WPS setup. It is optional for STA.

13 Progress Bar : Display rate of progress from Start to Connected status.

14 Status Bar: Display currently WPS Status.

15 Automatically select the AP: Start to add to AP by using to select the AP automatically in PIN method.

****There are examples in [section 2-7-3\(PIN Enrollee Setup\)](#), [section 2-7-4\(PBC Enrollee Setup\)](#) and [section 2-7-5\(Registrar Configures and AP\)](#)****

Icons and buttons:



Show the information of Status Section.



Hide the information of Status Section.

WPS Information on AP

WPS information contain authentication type, encryption type, config methods, device password id, selected registrar, state, version, AP setup locked, UUID-E and RF bands. The introduction indicates as follow :

The screenshot shows the RaUI interface with the 'Network' tab selected. It displays a list of detected APs with columns for BSSID, Channel, SSID, Security, Signal, and a visual signal strength bar. Below the list are buttons for 'Rescan', 'Add to Profile', and 'Connect'. The 'WPS' sub-tab is active, showing various WPS-related fields.

BSSID	Channel	SSID	Security	Signal
132	2	b g	100%	
202	1	b g	70%	
213	11	b g	29%	
215	6	b g	44%	
219	1	b g	81%	
243	5	b g	100%	
_Shiang_2860AP	11	b g n	91%	
AP	1	b g	50%	
AP1	6	b g n	100%	
APPA	6	b g n	91%	

Field	Value
Authentication Type	Unknown
Encryption Type	None
Config Methods	Unknown
Device Password ID	
Selected Registrar	Unknown
State	Unknown
Version	Unknown
AP Setup Locked	Unknown
UUID-E	Unknown
RF Bands	Unknown

① Authentication Type : There are three type of authentication modes supported by RaConfig. They are open, Shared, WPA-PSK and WPA system.

② Encryption Type : For open and shared authentication mode, the selection of encryption type are None and WEP. For WPA, WPA2, WPA-PSK and WPA2-PSK authentication mode, the encryption type supports both TKIP and AES.

③ Config Methods : Correspond to the methods the AP supports as an Enrollee for adding external Registrars. (a bitwise OR of values)

Value	Hardware Interface
0x0001	USBA (Flash Drive)
0x0002	Ethernet
0x0004	Label
0x0008	Display
0x0010	External NFC Token
0x0020	Integrated NFC Token
0x0040	NFC Interface
0x0080	Push Button
0x0100	Keypad

④ Device Password ID : Indicate the method or identifies the specific password that the selected Registrar intends to use. AP in PBC mode must indicate 0x0004 within two-minute Walk Time.

Value	Description
0x0000	Default (PIN)
0x0001	User-specified
0x0002	Rekey
0x0003	Display
0x0004	PushButton (PBC)
0x0005	Registrar-specified
0x0006-0x000F	Reserved

⑤ Selected Registrar : Indicate if the user has recently activated a Registrar to add an Enrollee. The values are "TRUE" and "FALSE".

⑥ State : The current configuration state on AP. The values are "Unconfigured" and "Configured".

⑦ Version : WPS specified version.


⑧ AP Setup Locked : Indicate if AP has entered a setup locked state.

⑨ UUID-E : The universally unique identifier (UUID) element generated by the Enrollee. There is a value. It is 16 bytes.

⑩ RF Bands : Indicate all RF bands available on the AP. A dual-band AP must provide it. The values are "2.4GHz" and "5GHz".

Example to Add to Registrar Using PIN Method

The user obtains a device password (PIN Code) from the STA and enters the password into the Registrar. Both the Enrollee and the Registrar use PIN Config method for the configuration setup. The detail indicates as follows.

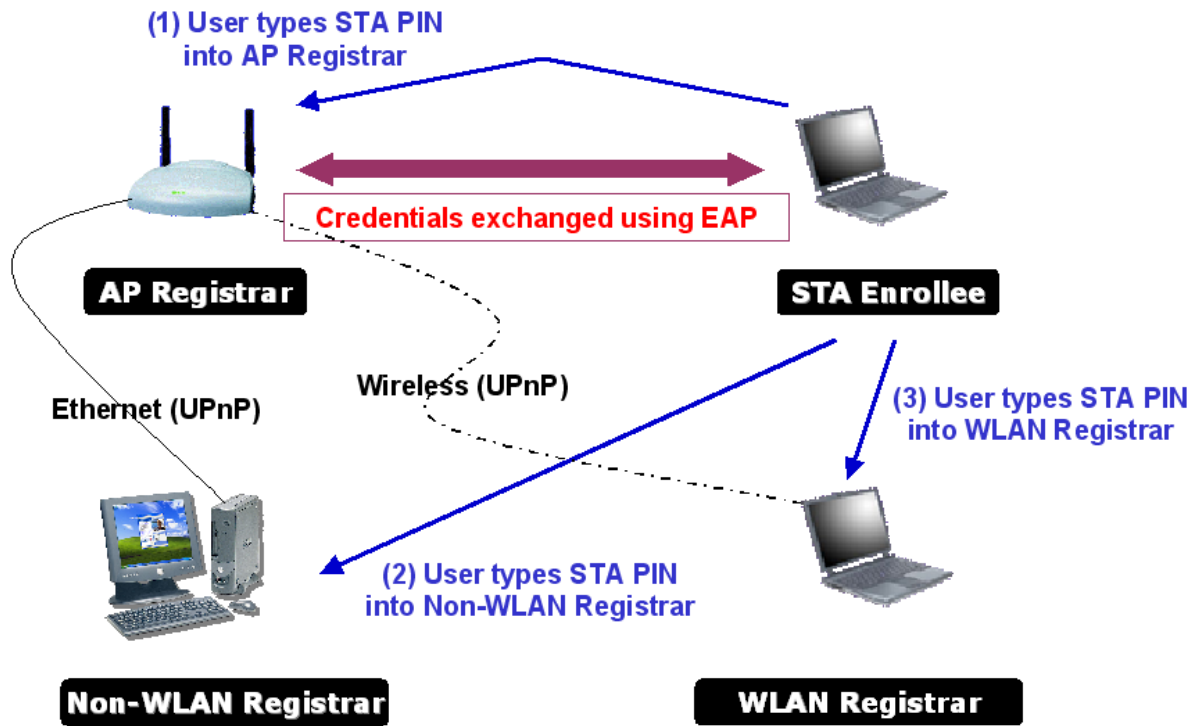

① Go to the box of Config Mode and select Enrollee.

WPS AP List				
ID : Unknown	Ubicom_Sample	00-0C-43-28-60-20	1	
ID : Unknown	AP1-WPS	00-10-18-90-2E-27	1	
ID : Unknown	arvint-2860AP	00-0C-43-28-60-60	3	
ID : Unknown	default	00-18-02-4A-0A-6B	6	

WPS Profile List	

PIN


PBC

☒ WPS Associate IE
☒ WPS Probe IE
☐ Automatically select the AP


Progress >> 0%

WPS status is disconnected

② Click "Rescan" button to update available WPS APs.

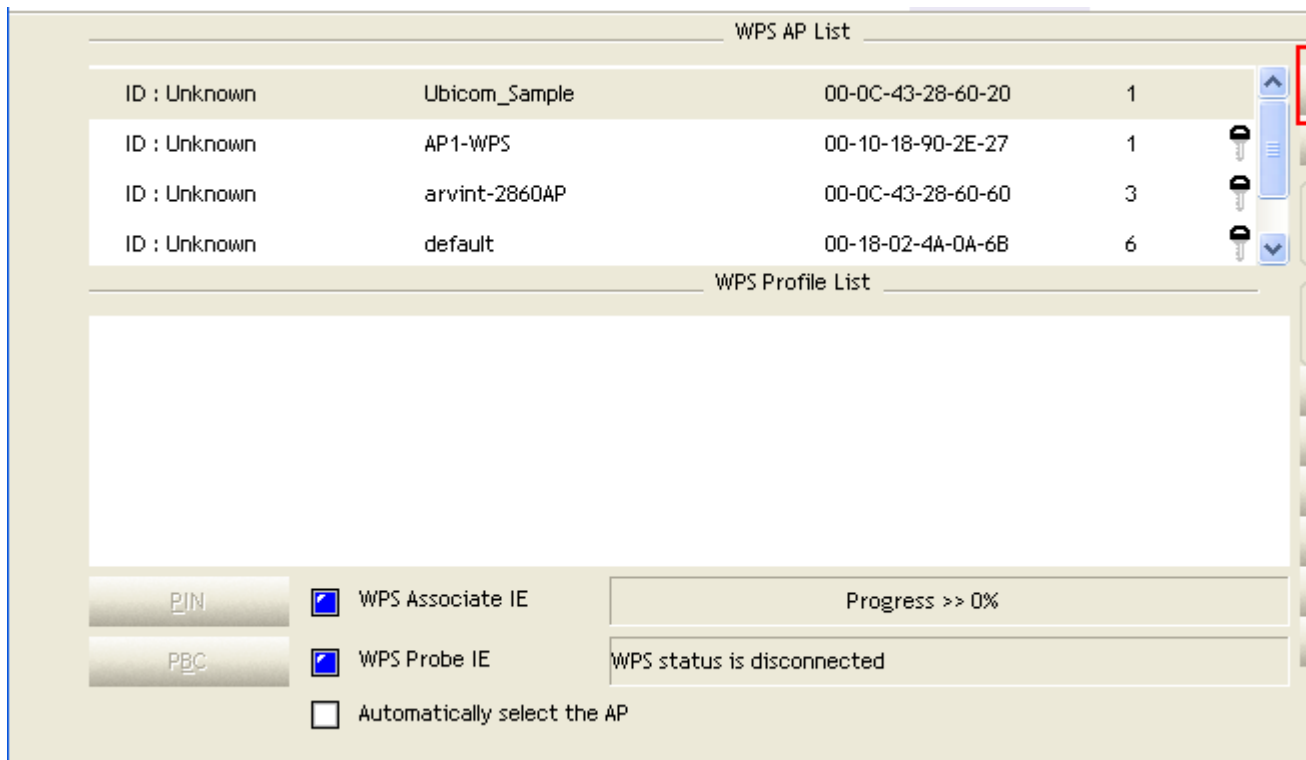


3 Select an AP (SSID/BSSID) that STA will join to.

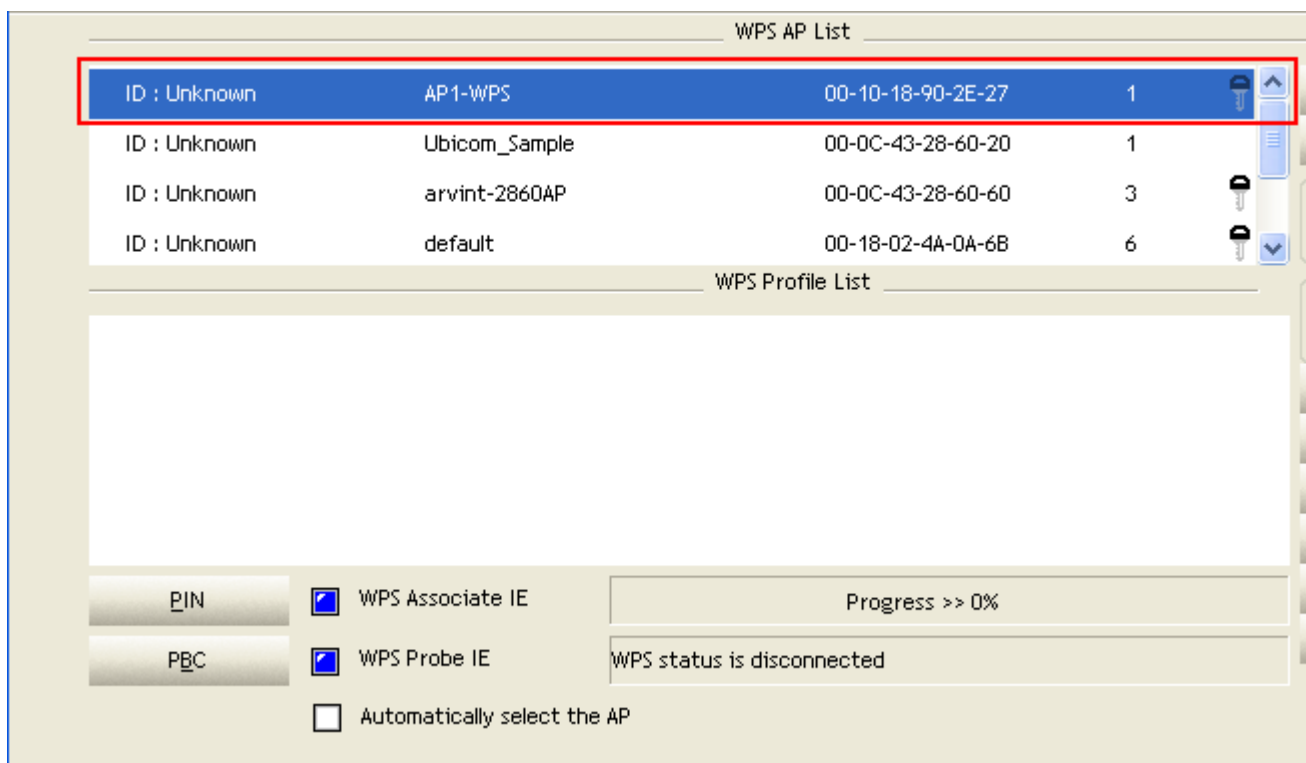

4 Click "PIN" button to start PIN connection.


5 Enter PIN Code of STA into the Registrar when prompted by the Registrar.

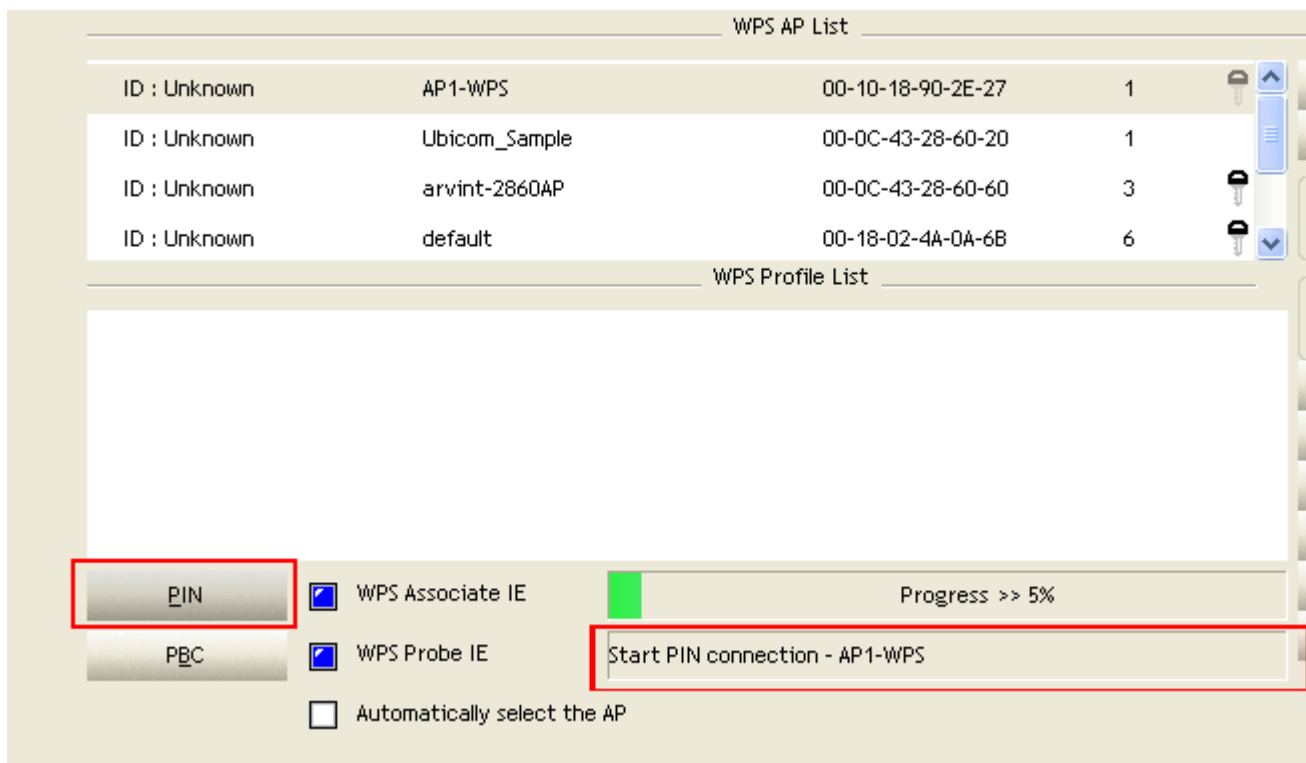


*Allow of an exchange between Step 4 and Step 5.

*If you use Microsoft Window Connection Now as an External Registrar, you must start PIN connection at STA first. After that, search out your WPS Device name and MAC address at Microsoft Registrar. Add a new device and enter PIN Code of STA at Microsoft Registrar when prompted.


6 The result will look like the below figure.

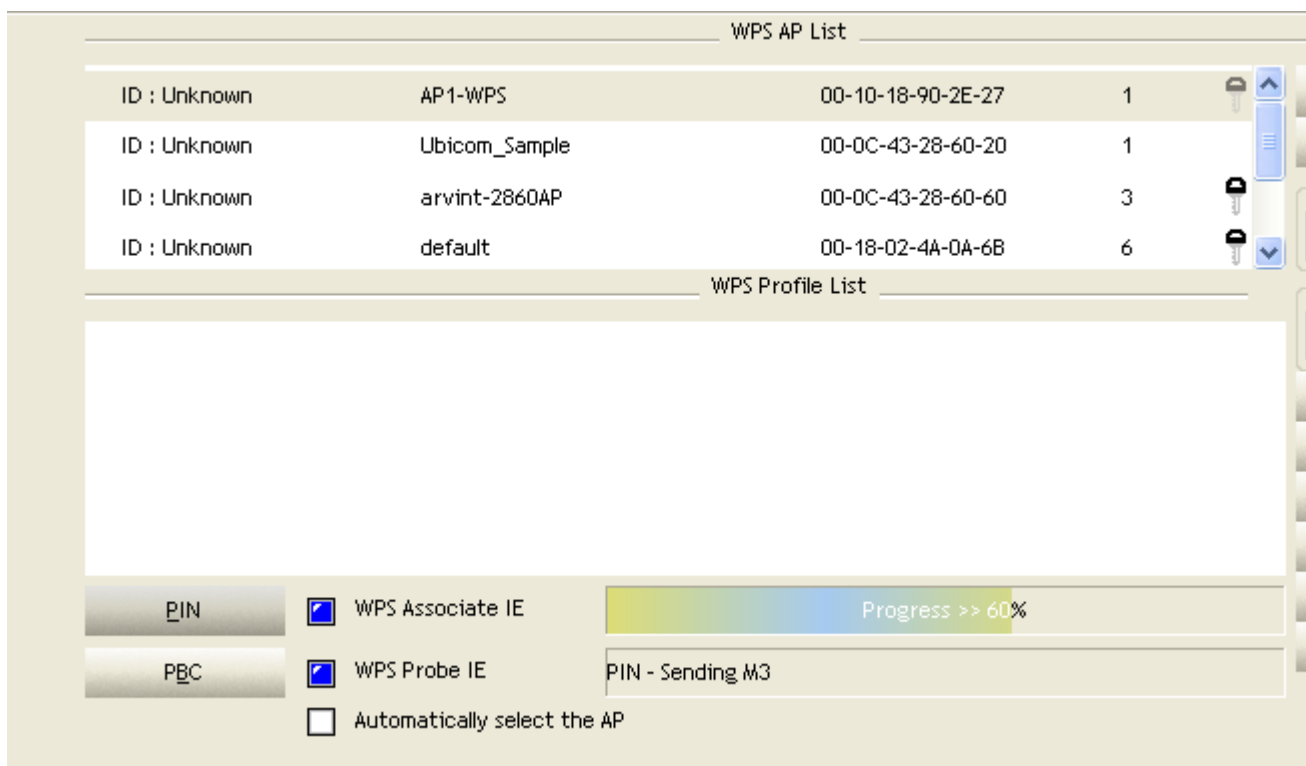


7 Configured and got one or multiple credential(s).

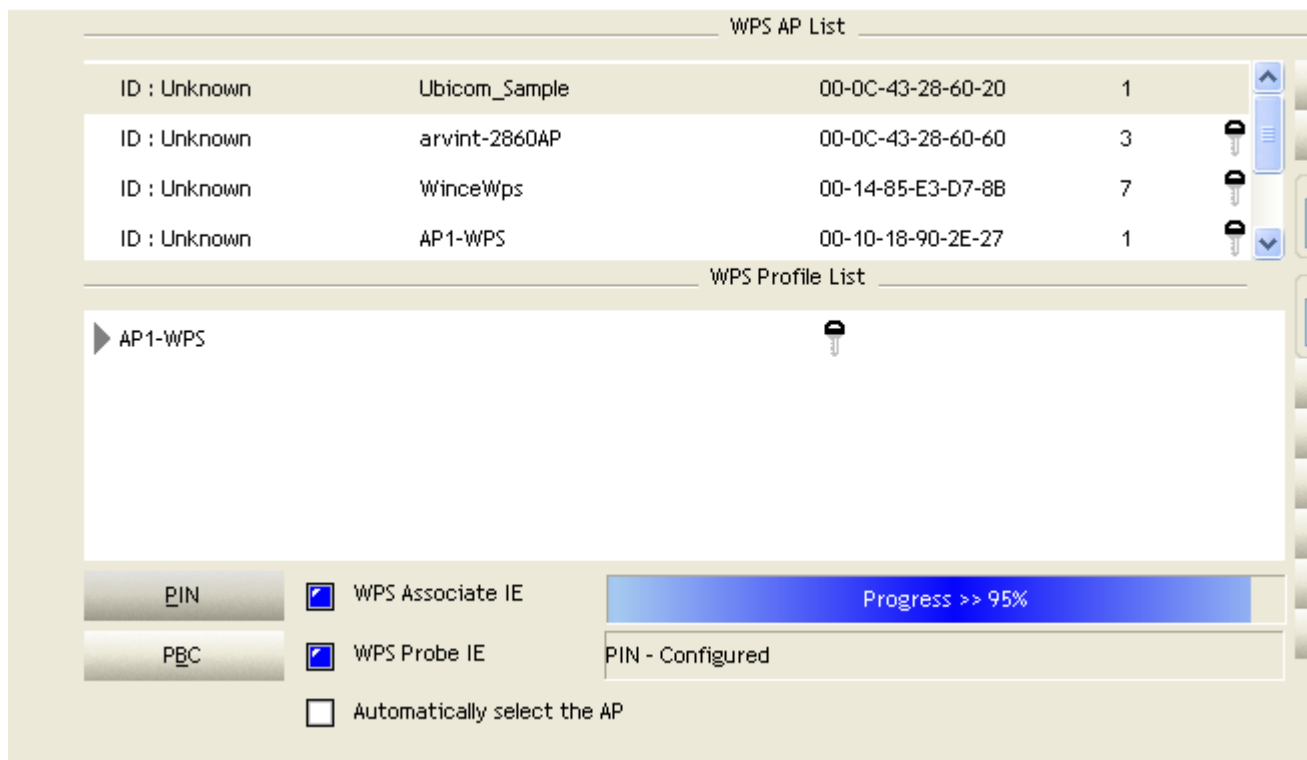


8 Then connect successfully. The result will look like the below figure.

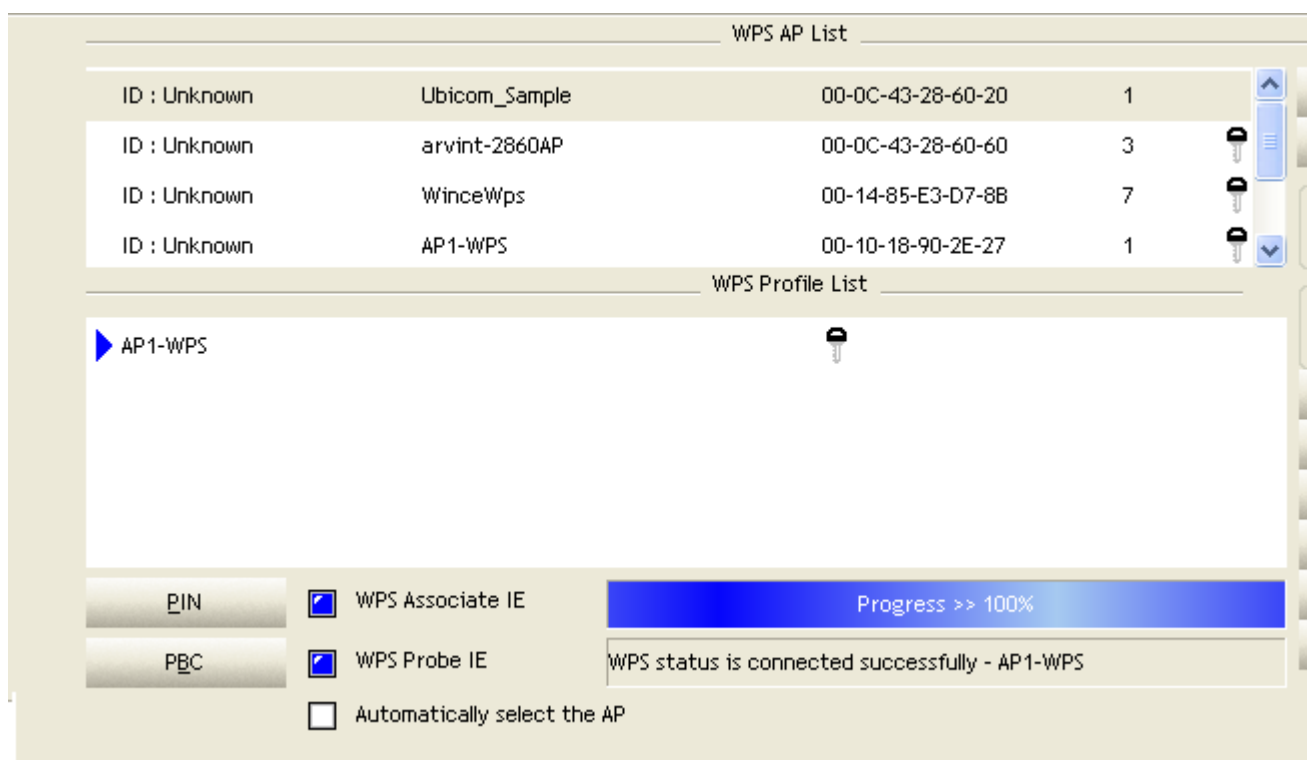

9 Click "Detail" button.

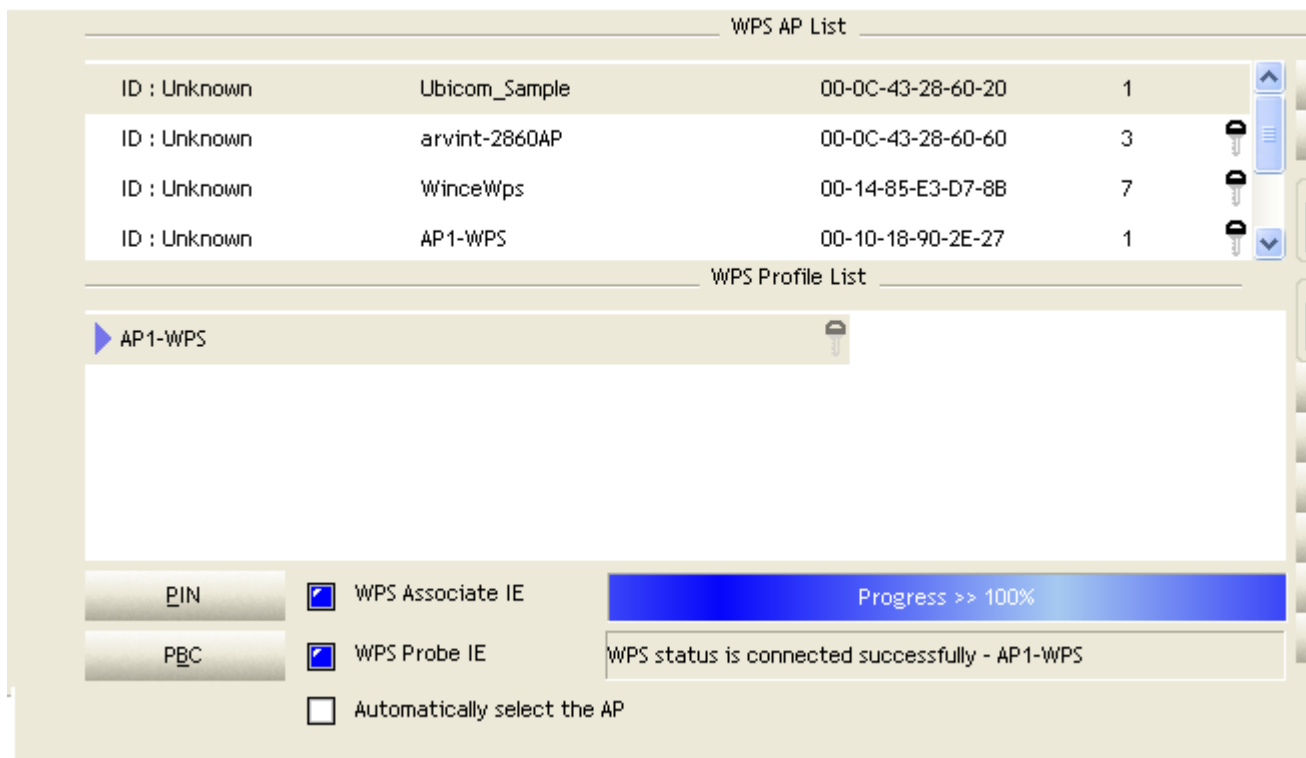

10 You will look like the below figure.

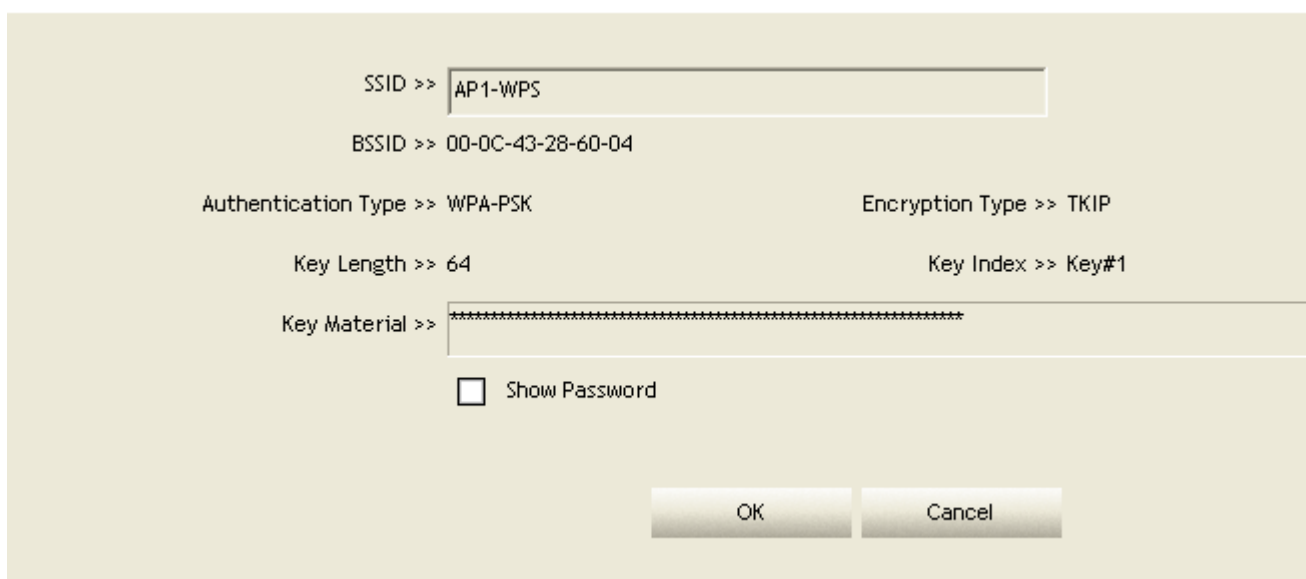

*If Credential#1 is reliable and present, system will connect with Credential#1. On the contrary, system will auto rotate to the next existed credential.

*Also you can click "Rotate" button. Command to rotate to the next credential you want to use.

Describe "WPS Status Bar" - "PIN - xxx" as follow :

1 A successful PIN Configuration :

Start PIN connection - SSID ~> Begin associating to WPS AP ~> Associated to WPS AP ~> Sending EAPOL-Start ~> Sending EAP-Rsp (ID) ~> Receive EAP-Req (Start) ~> Sending M1 ~> Received M2 ~> (Received M2D ~> Sending EAP-Rsp (ACK)) ~> Sending

M3 ~> Received M4 ~> Sending M5 ~> Received M6 ~> Sending M7 ~> Received M8 ~> Sending EAP-Rsp(Done) ~> Configured ~> WPS status is disconnected ~> WPS status is connected successfully-SSID

② WPS configuration doesn't complete after **two-minute connection** :

WPS Eap process failed.

③ When Errors occur within **two-minute connection**, the WPS status bar might report on "WPS Eap process failed".

Error messages might be :

1. Receive EAP with wrong NONCE.
2. Receive EAP without integrity.
3. Error PIN Code.
4. An inappropriate EAP-FAIL received.


Example to Add to Registrar Using PBC Method

The PBC method requires the user to press a PBC button on both the Enrollee and the Registrar within a two-minute interval called the Walk Time. If only one Registrar in PBC mode, which PBC mode is obtained from ID 0x0004, is found after a complete scan, the Enrollee can immediately begin running the Registration Protocol.

If the Enrollee discovers more than one Registrar in PBC mode, it MUST abort its connection attempt at this scan and continue searching until two-minute timeout.

**Before you press PBC on STA and candidate AP. Make sure all of APs aren't PBC mode or APs using PBC mode have left their Walk Time.*

Push PBC button on both Registrar and Enrollee

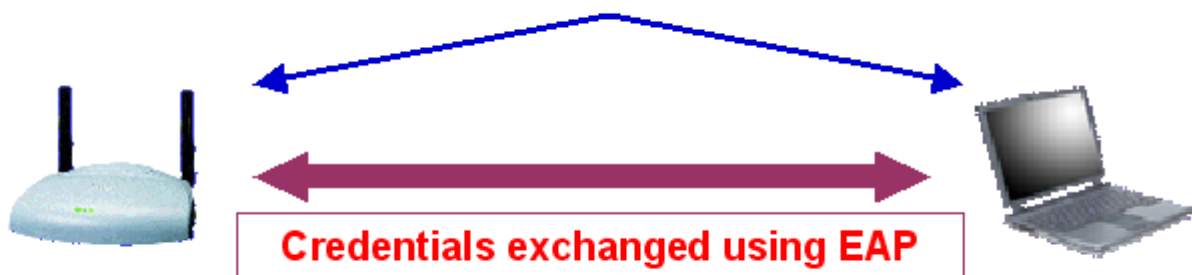

AP Registrar

STA Enrollee

① Go to the box of Config Mode and select Enrollee.


The screenshot shows a web-based configuration interface for WPS. At the top, there is a 'WPS AP List' table with the following data:

ID	AP Name	MAC Address	Count	Action
ID : Unknown	Ubicom_Sample	00-0C-43-28-60-20	1	Up arrow
ID : Unknown	AP1-WPS	00-10-18-90-2E-27	1	Key icon
ID : Unknown	arvint-2860AP	00-0C-43-28-60-60	3	Key icon
ID : Unknown	default	00-18-02-4A-0A-6B	6	Key icon

Below the table is a 'WPS Profile List' section, which is currently empty. At the bottom of the interface, there are two buttons: 'PIN' and 'PBC'. To the right of these buttons are two checkboxes: 'WPS Associate IE' (checked) and 'WPS Probe IE' (checked). Below these is an unchecked checkbox labeled 'Automatically select the AP'. To the right of the checkboxes is a 'Progress >> 0%' indicator and a status box that says 'WPS status is disconnected'.


② Click PBC to start PBC connection.

3 Push PBC on AP.

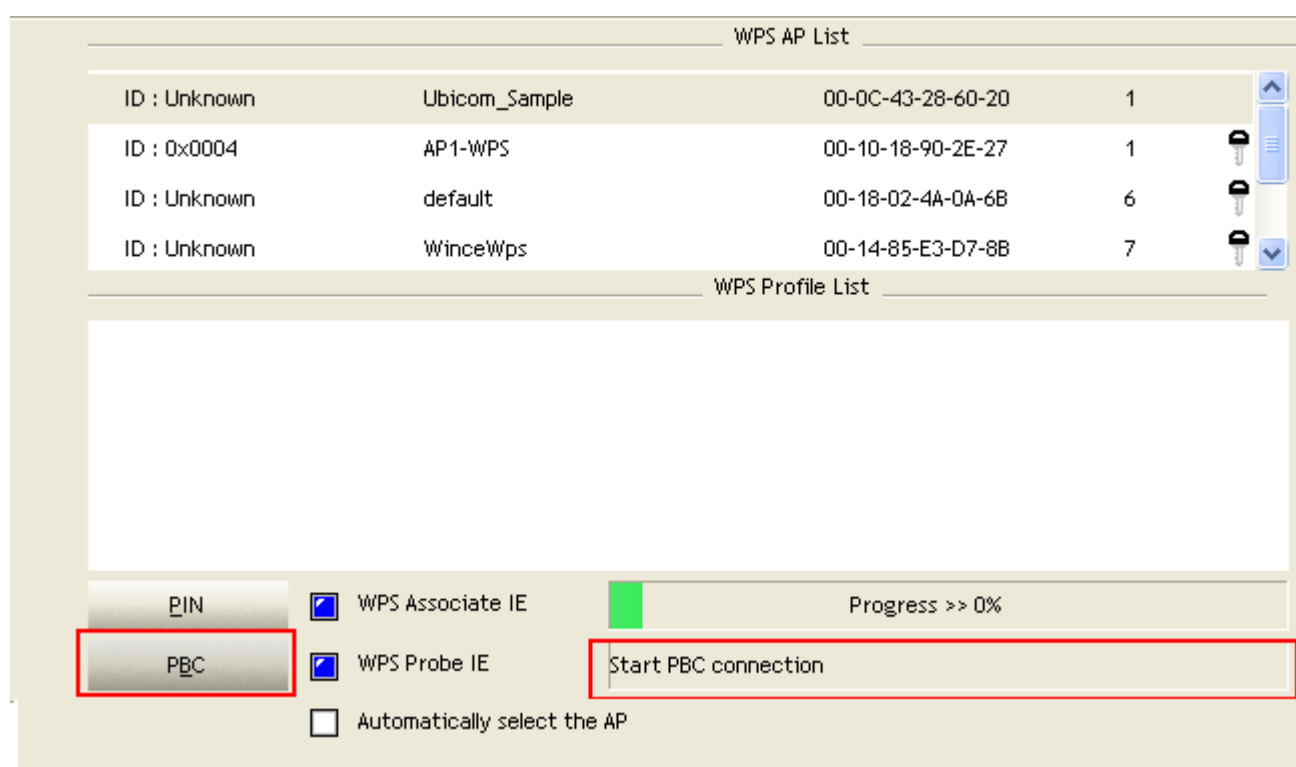

*Allow of an exchange between Step 2 and Step 3.

4 Then it can be shown "Rcanning AP" as the below figure.

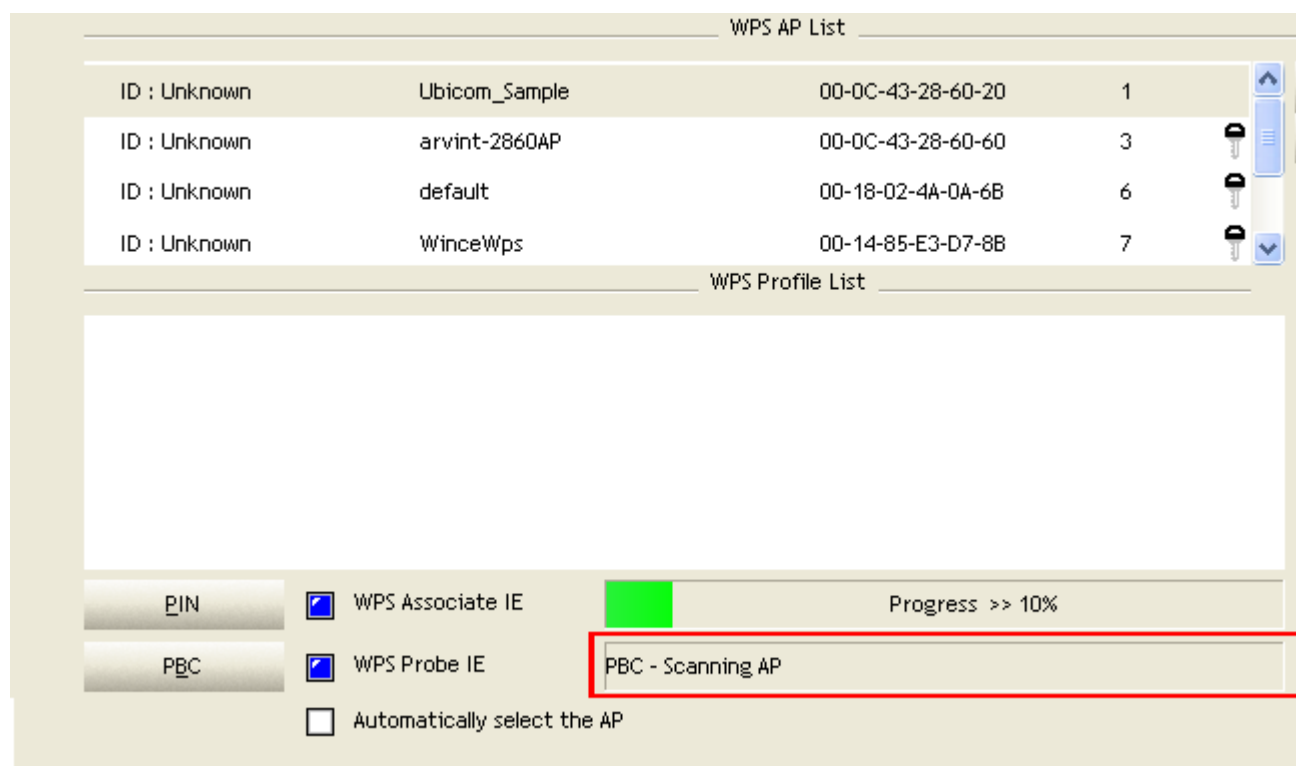

5 When finding only one AP, join it.

WPS AP List

ID : Unknown	AP1-WPS	00-10-18-90-2E-27	1	
ID : Unknown	arvint-2860AP	00-0C-43-28-60-60	3	
ID : Unknown	dlink	00-19-5B-05-0B-96	10	

WPS Profile List

PIN

☒ WPS Associate IE

Progress >> 15%

PBC

☒ WPS Probe IE

PBC - Begin associating to WPS AP

☐ Automatically select the AP

6 Check WPS Information on available WPS APs

General WPS CCX

Authentication Type >> WPA-PSK State >> Configure

Encryption Type >> TKIP Version >> 1.0


Config Methods >> 0x0088 AP Setup Locked >> Unknown

Device Password ID >> 0x0004 UUID-E >> Unknown


Selected Registrar >> TRUE RF Bands >> Unknown

OK

7 Configured and got one or multiple credential(s).

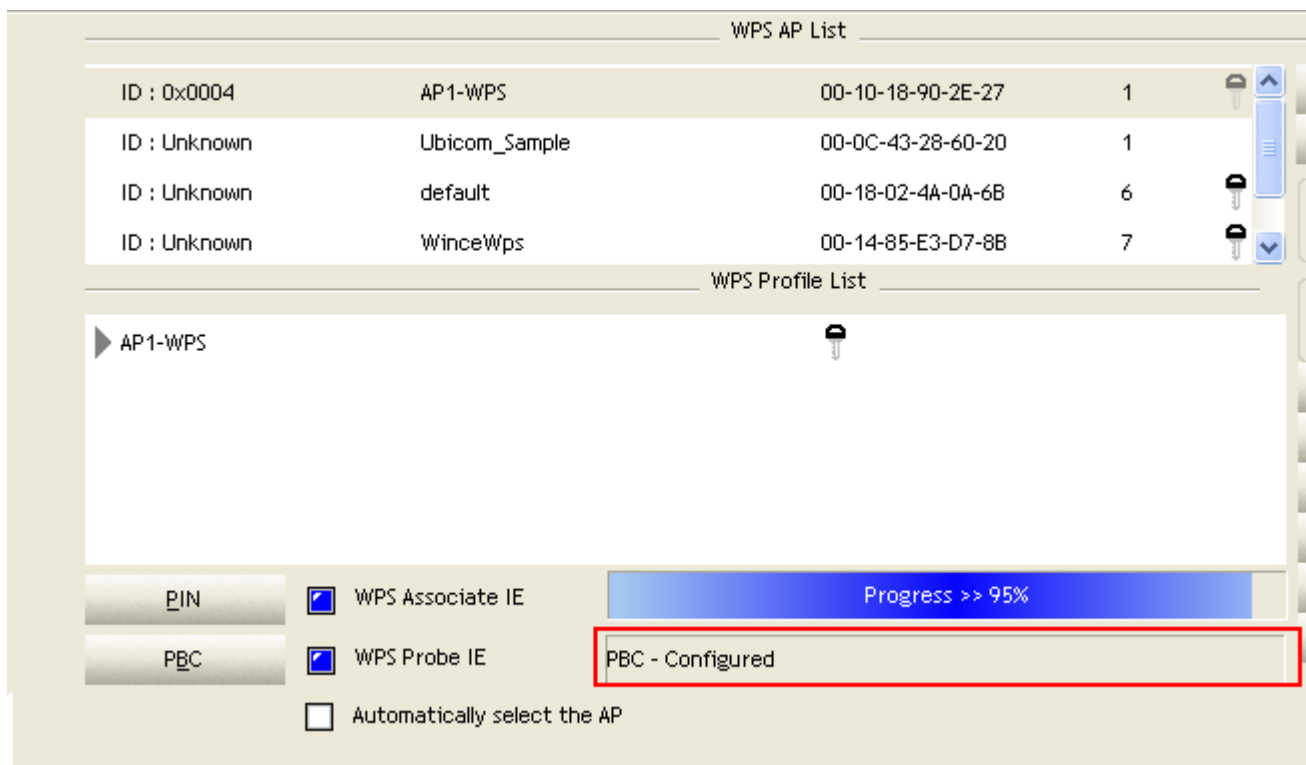

8 Then connect successfully. The result will look like the below figure.

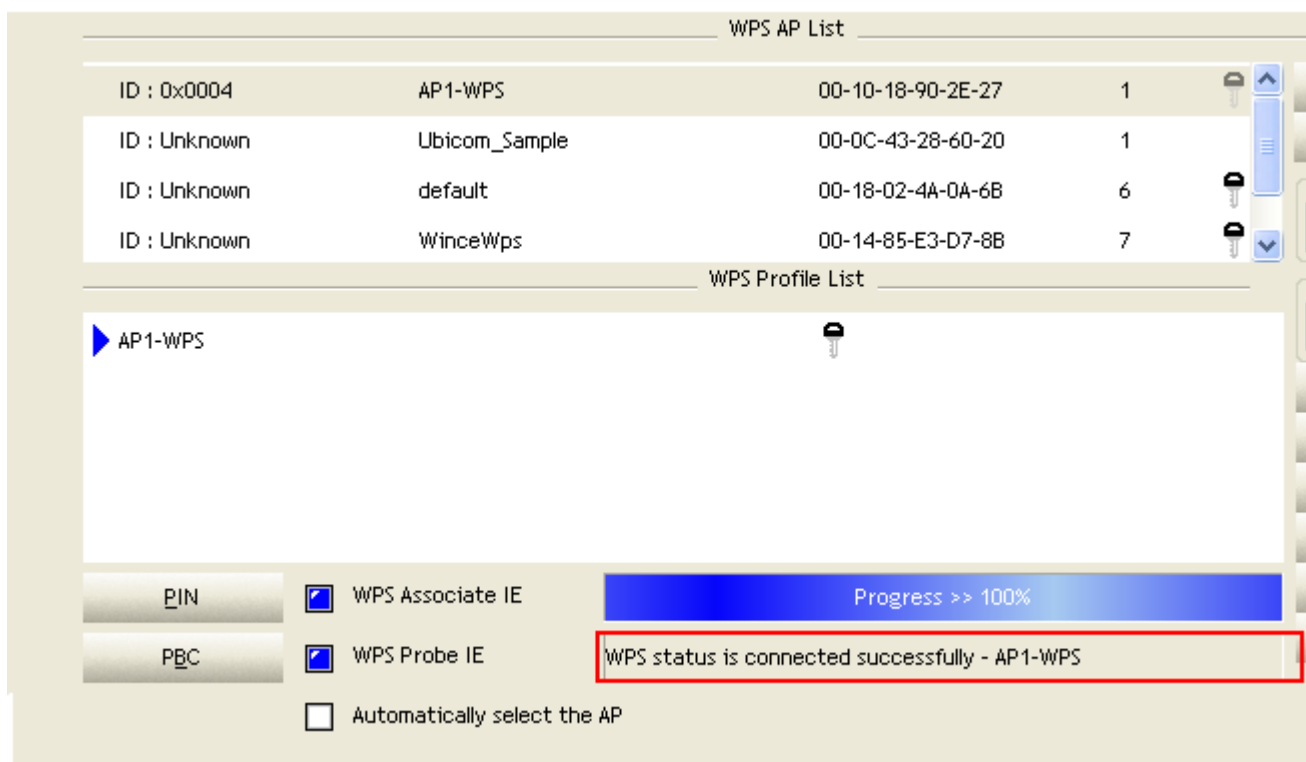

Describe "WPS Status Bar" - "PBC - xxx" as follow :

1 A successful PBC Configuration :

Start PBC connection ~> Scanning AP ~> Begin associating to WPS AP ~> Associated to WPS AP ~> Sending EAPOL-Start ~> Sending EAP-Rsp (ID) ~> Receive EAP-Rsp (Start) ~> Sending M1 ~> Received M2 ~> Sending M3 ~> Received M4 ~> Sending M5 ~> Received M6 ~> Sending M7 ~> Received M8 ~> Sending EAP-Rsp (Done) ~> Configured

~> WPS status is disconnected ~> WPS status is connected successfully-SSID

② No PBC AP available :

Scanning AP ~> No PBC AP available ~> Scanning AP ~> No PBC AP available ~>...

③ Too Many PBC AP available :

Scanning AP ~> Too Many PBC AP available ~> Scanning AP ~> Too Many PBC AP available ~>...

④ WPS configuration doesn't complete after **two-minute connection** :

WPS Eap process failed.

⑤ When Errors occur within **two-minute connection**, the WPS status bar might report on "WPS Eap process failed".

Error messages might be :

1. Receive EAP with wrong NONCE.
2. Receive EAP without integrity.
3. An inappropriate EAP-FAIL received.

Describe "Multiple PBC session overlaps" as follow :

① Dual bands :

AP1 is a G-Band AP using PBC mode. (ID = 0x0004)

AP2 is a A-Band AP using PBC mode. (ID = 0x0004)

They have the same UUID-E.

STA would regard these two APs as a dual-radio AP and select one band to connect.

② Different UUID-E :

AP1 is a G-Band AP using PBC mode. (ID = 0x0004)


AP2 is a G-Band AP using PBC mode. (ID = 0x0004)

They have the different UUID-E.


STA would regard these two APs as two different APs and wait until only one PBC AP is available.

Example to Configure a Network/AP Using PIN or PBC Method

Push PBC button on both Registrar and Enrollee

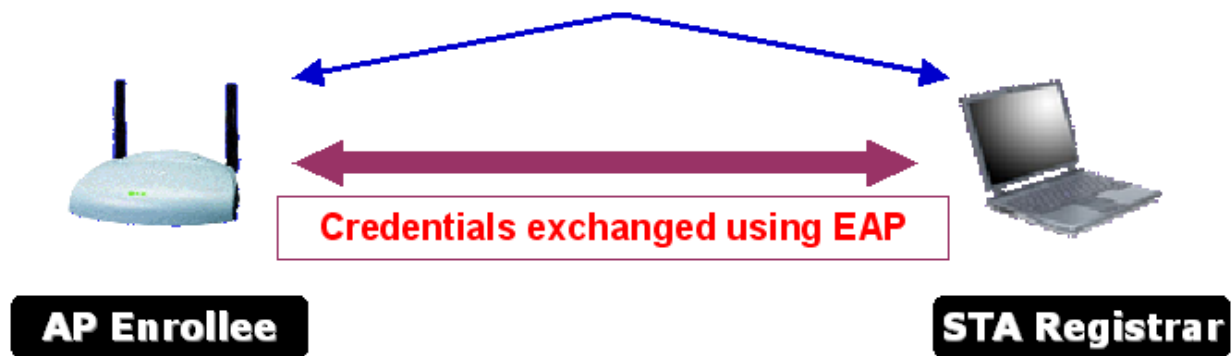

User types AP PIN into external Registrar

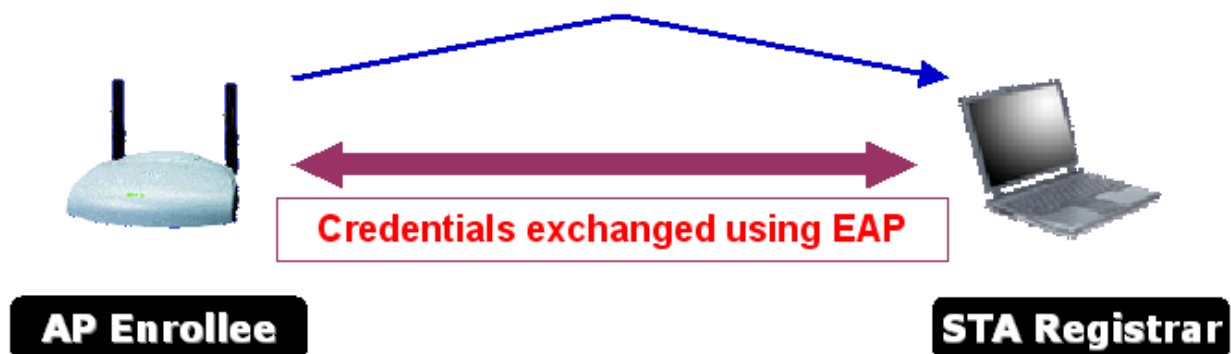


- 1 Go to the box of Config Mode and select Registrar.

WPS AP List				
ID :	ClaudeWpsAP	00-14-85-E3-D7-8B	1	
ID : Unknown	AP1-WPS	00-10-18-90-2E-27	1	

WPS Profile List	
ExRegNW286004	

PIN	☒ WPS Associate IE	Progress >> 0%
PBC	☒ WPS Probe IE	
☐ Automatically select the AP		WPS status is disconnected


- ② Enter "Detail" of the credential and change configurations (SSID, Authentication, Encryption and Key) manually if need.

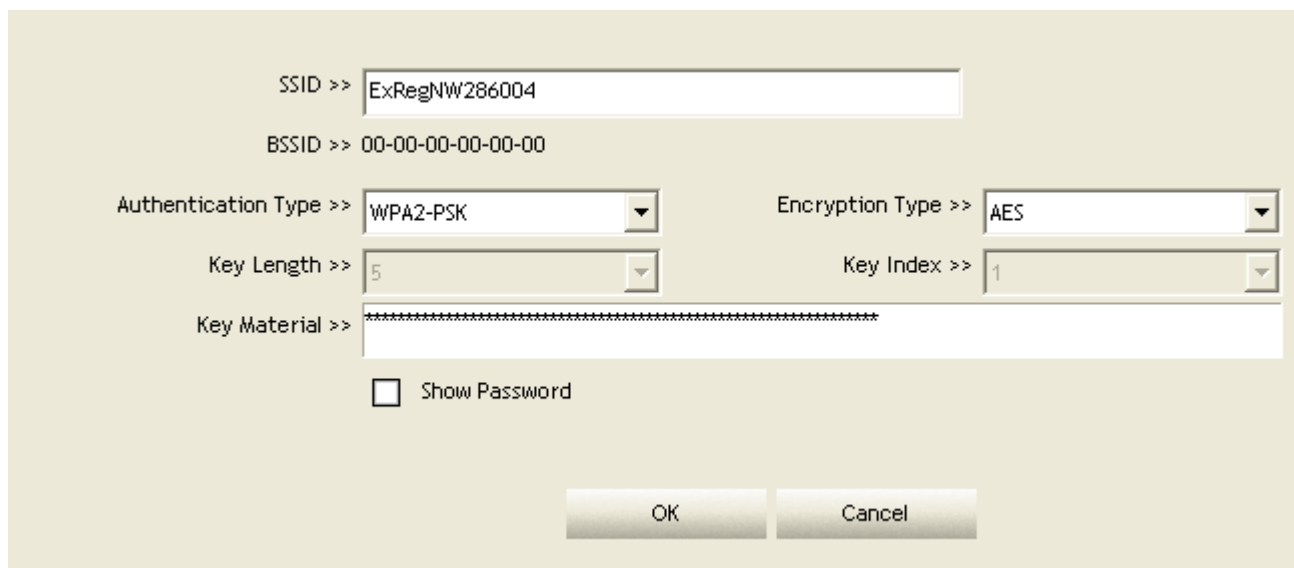

WPS configuration dialog box. Fields include:

- SSID >> ExRegNW286004
- BSSID >> 00-00-00-00-00-00
- Authentication Type >> WPA2-PSK
- Encryption Type >> AES
- Key Length >> 5
- Key Index >> 1
- Key Material >> [Redacted]
- ☐ Show Password
- Buttons: OK, Cancel

- ③ If PIN configuration setup, enter Pin Code read from your Enrollee.

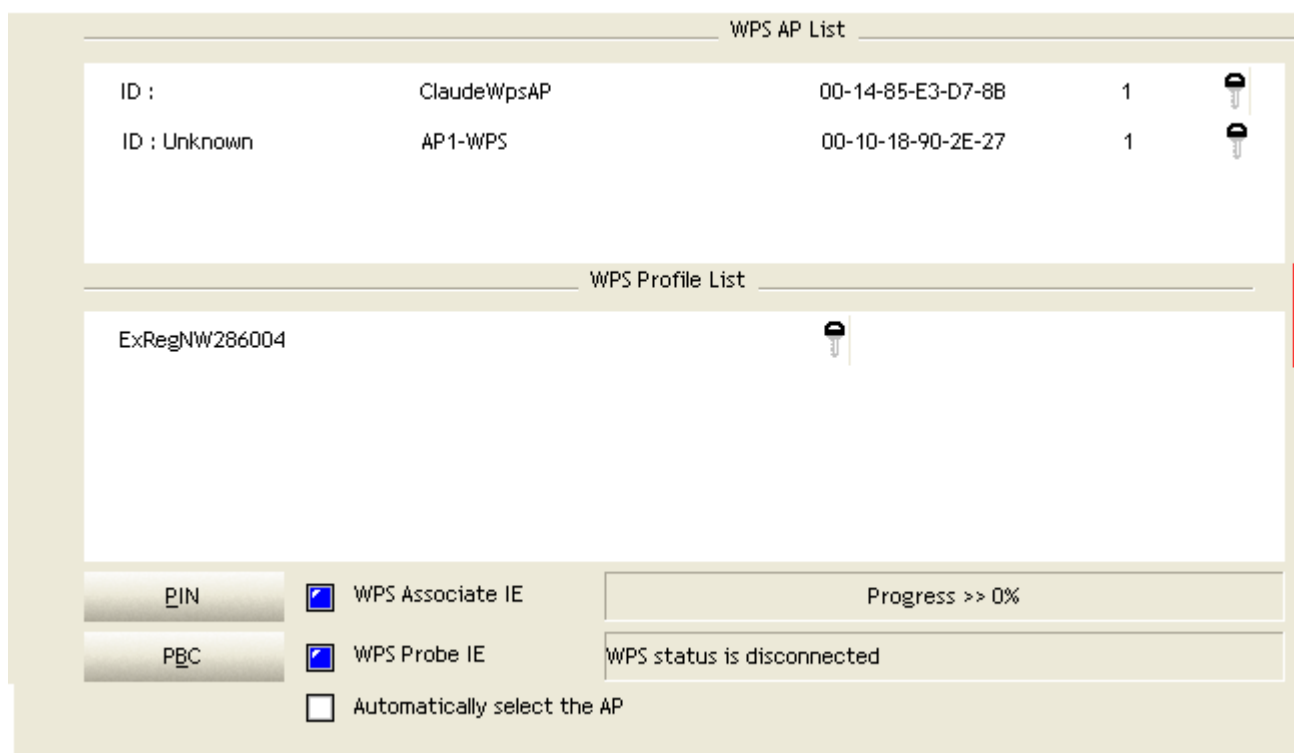

WPS configuration window. It contains two lists:


- WPS AP List**

ID	AP Name	BSSID	Priority	Icon
ClaudeWpsAP	00-14-85-E3-D7-8B	1	[Key Icon]	
Unknown	AP1-WPS	00-10-18-90-2E-27	1	[Key Icon]
- WPS Profile List**

ExRegNW286004	[Key Icon]
---------------	------------

At the bottom, there are buttons for PIN and PBC, checkboxes for WPS Associate IE, WPS Probe IE, and Automatically select the AP. A progress bar shows 0% and a status message says "WPS status is disconnected".

- ④ Start PIN or PBC. The following procedures are as similar as [section 2-7-3](#)(PIN Enrollee Setup) or [section 2-7-4](#)(PBC Enrollee Setup),
- ⑤ If your AP Enrollee has been configured before WPS process, the credential you set in advance will be updated to AP itself. Otherwise, after a successful registration, the AP Enrollee will be re-configured with the new parameters, and STA Registrar will connect to the AP Enrollee with these new parameters.

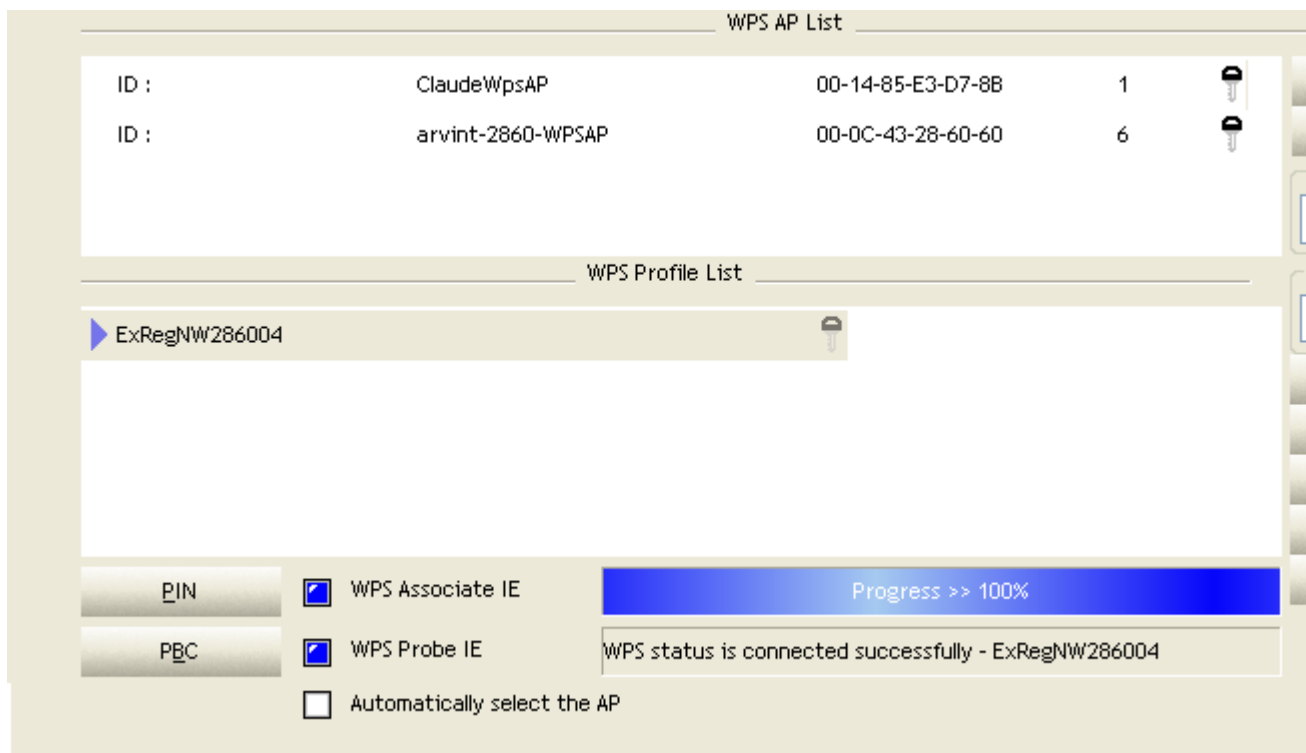

Describe "WPS Status Bar" - "PIN - xxx" as follow :

A successful PIN Configuration :

Start PIN connection - SSID ~> Begin associating to WPS AP ~> Associated to WPS AP ~> Sending EAPOL-Start ~> Sending EAP-Rsp (ID) ~> Receive M1 ~> Sending M2 ~> Receive M3 ~> Sending M4 ~> Receive M5 ~> Sending M6 ~> Receive M7 ~> Sending M8 ~> Receive EAP Rsp (Done) ~> Sending EAP Rsp (ACK) ~> Configured ~> WPS status is disconnected ~> WPS status is connected successfully-SSID

Describe "WPS Status Bar" - "PBC - xxx" as follow :

A successful PBC Configuration :

Start PBC connection ~> Scanning AP ~> Begin associating to WPS AP ~> Associated to WPS AP ~> Sending EAPOL-Start ~> Sending EAP-Rsp (ID) ~> Receive M1 ~> Sending M2 ~> Receive M3 ~> Sending M4 ~> Receive M5 ~> Sending M6 ~> Receive M7 ~> Sending M8 ~> Receive EAP Rsp (Done) ~> Sending EAP Rsp (ACK) ~> Configured ~> WPS status is disconnected ~> WPS status is connected successfully-SSID

Link Status

Figure 2-9 is the link status page, it displays the detail information current connection.

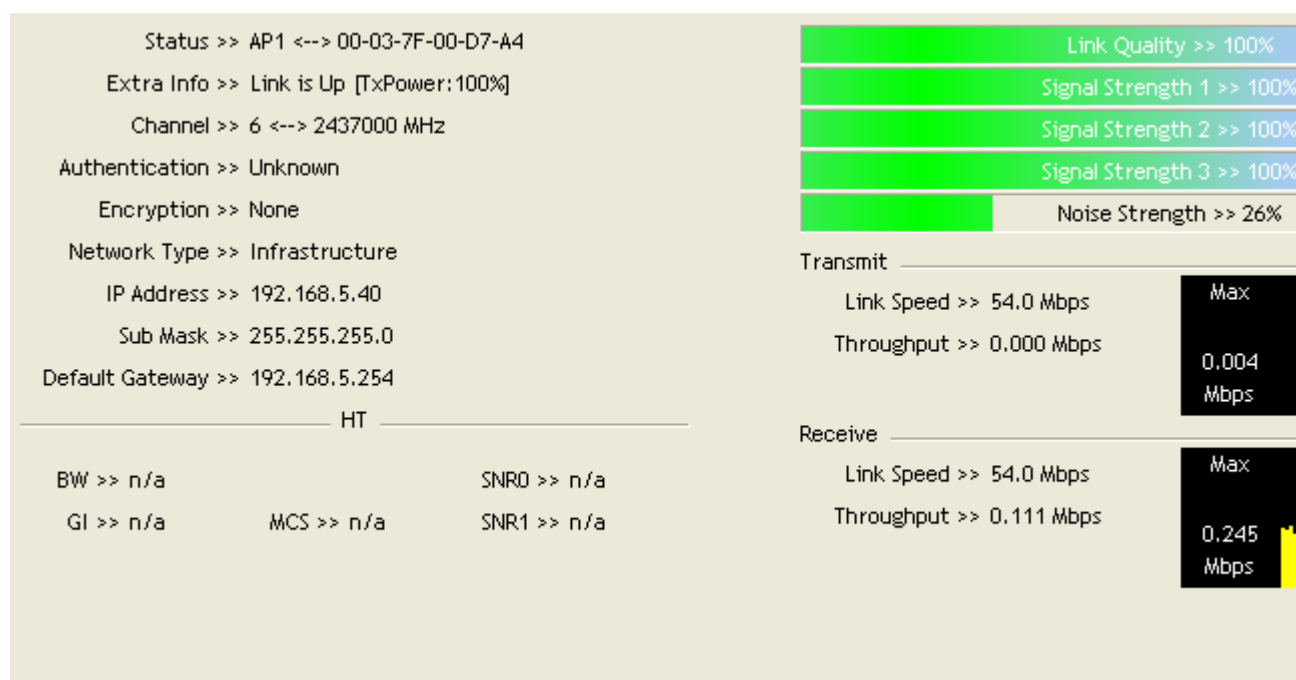


Figure 2-9 Link Status function

- ① Status : Current connection status. If no connection, it will show Disconnected. Otherwise, the SSID and BSSID will show here.
- ② Extra Info : Display link status in use.
- ③ Channel : Display current channel in use.
- ④ Authentication : Authentication mode in use.
- ⑤ Encryption : Encryption type in use.
- ⑥ Network Type : Network type in use.
- ⑦ IP Address : IP address about current connection.
- ⑧ Sub Mask : Sub mask about current connection.
- ⑨ Default Gateway : Default gateway about current connection.
- ⑩ Link Speed : Show current transmit rate and receive rate.
- ⑪ Throughput : Display transmits and receive throughput in unit of Mbps.
- ⑫ Link Quality : Display connection quality based on signal strength and TX/RX packet error rate.
- ⑬ Signal Strength 1 : Receive signal strength 1, user can choose to display as percentage or dBm format.

- 14 Signal Strength 2 : Receive signal strength 2, user can choose to display as percentage or dBm format.
- 15 Signal Strength 3 : Receive signal strength 3, user can choose to display as percentage or dBm format.
- 16 Noise Strength : Display noise signal strength.
- 17 HT : Display current HT status in use, containing BW, GI, MCS, SNR0, and SNR1 value.
([Show the information only for 802.11n wireless card.](#))

Auth. \ Encry. Setting - WEP/TKIP/AES

Auth. \ Encry. Setting, shown as Figure 3-1.

The screenshot shows a configuration window titled "Auth. \ Encry." with a subtitle "8021X". The window contains the following elements:

- Authentication >>**: A dropdown menu currently showing "WPA-PSK".
- Encryption >>**: A dropdown menu currently showing "AES".
- WPA Preshared Key >>**: A text input field.
- Wep Key**: A section containing four rows, each with a radio button, a dropdown menu (all set to "Hexadecimal"), and a text input field. The rows are labeled "Key#1", "Key#2", "Key#3", and "Key#4".
- Buttons**: "OK" and "Cancel" buttons at the bottom right.

Figure 3-1 Auth. \ Encry. Setting

- ❶ Authentication Type : There are 7 type of authentication modes supported by RaUI. They are open, Shared, LEAP, WPA and WPA-PSK, WPA2 and WPA2-PSK.
- ❷ Encryption Type : For open and shared authentication mode, the selection of encryption type are None and WEP. For WPA, WPA2, WPA-PSK and WPA2-PSK authentication mode, the encryption type supports both TKIP and AES.
- ❸ 8021X : This is introduced in the topic of [Section 3-2](#).
- ❹ WPA Pre-shared Key : This is the shared secret between AP and STA. For WPA-PSK and WPA2-PSK authentication mode, this field must be filled with character longer than 8 and less than 32 length.
- ❺ WEP Key : Only valid when using WEP encryption algorithm. The key must matched AP's key. There are several formats to enter the keys.
 - ❶ Hexadecimal - 40bits : 10 Hex characters.
 - ❷ Hexadecimal - 128bits : 32Hex characters.
 - ❸ ASCII - 40bits : 5 ASCII characters.
 - ❹ ASCII - 128bits : 13 ASCII characters.

****Powered by Meetinghouse.**

802.1x Setting

802.1x is a authentication for "WPA" and "WPA2" certificate to server.

The screenshot shows a configuration window for 802.1x authentication. The 'Auth. \ Encry.' tab is selected, and the '8021X' sub-tab is active. The 'EAP Method >>' dropdown is set to 'PEAP', and the 'Tunnel Authentication >>' dropdown is set to 'EAP-MSCHAP v2'. A 'Sess' checkbox is present. The 'ID \ PASSWORD' tab is selected, showing fields for 'Authentication ID / Password' (Identity, Password, Domain Name) and 'Tunnel ID / Password' (Identity, Password). 'OK' and 'Cancel' buttons are at the bottom.

Authentication type :

- ① PEAP : Protect Extensible Authentication Protocol. PEAP transport securely authentication data by using tunneling between PEAP clients and an authentication server. PEAP can authenticate wireless LAN clients using only server-side certificates, thus simplifying the implementation and administration of a secure wireless LAN.
- ② TLS/Smart Card : Transport Layer Security. Provides for certificate-based and mutual authentication of the client and the network. It relies on client-side and server-side certificates to perform authentication and can be used to dynamically generate user-based and session-based WEP keys to secure subsequent communications between the WLAN client and the access point.
- ③ TTLS : Tunneled Transport Layer Security. This security method provides for certificate-based, mutual authentication of the client and network through an encrypted channel. Unlike EAP-TLS, EAP-TTLS requires only server-side certificates.
- ④ EAP-FAST : Flexible Authentication via Secure Tunneling. It was developed by Cisco. Instead of using a certificate, mutual authentication is achieved by means of a PAC (Protected Access Credential) which can be managed dynamically by the authentication server. The PAC can be provisioned (distributed one time) to the client either manually or automatically. Manual provisioning is delivery to the client via disk or a secured network distribution method. Automatic provisioning is an in-band, over the air, distribution. [For tunnel authentication, only support "Generic Token Card" authentication now.](#)
- ⑤ LEAP : Light Extensible Authentication Protocol. It is an EAP authentication type used primarily in Cisco Aironet WLANs. It encrypts data transmissions using dynamically generated WEP keys, and supports mutual authentication.
- ⑥ MD5-Challenge: Message Digest Challenge. Challenge is an EAP authentication type that provides base-level EAP support. It provides for only one-way authentication - there is no mutual authentication of wireless client and the network.

Session Resumption : user can choose "Disable" and "Enable".

Tunnel Authentication :

① Protocol : Tunnel protocol, List information include "EAP-MSCHAP v2", "EAP-TLS/Smart card", "Generic Token Card", "CHAP", "MS-CHAP", "MS-CHAP-V2", "PAP" and "EAP-MD5".

② Tunnel Identity : Identity for tunnel.

③ Tunnel Password : Password for tunnel.

- ID \ PASSWORD -

① Authentication ID / Password : Identity, password and domain name for server. Only "EAP-FAST" and "LEAP" authentication can key in domain name. Domain name can be keyed in blank space.

② Tunnel ID / Password : Identity and Password for server.

- Client Certification -


The screenshot shows a dialog box titled "Client Certification". At the top, there are tabs for "Auth. \ Encry." (selected), "8021X", "ID \ PASSWORD", "Client Certification" (active), and "Server Certification". Below the tabs, there is a checkbox labeled "Use Client certificate" which is currently unchecked. To the right of this checkbox is a table with three columns: "Issued To", "Issued By", and "Expired On". The table contains the following data:

Issued To	Issued By	Expired On
wpatest2	2003serv	4/9/2008

Below the table, there are labels for "Issued To >> wpatest2", "Issued By >> 2003serv", "Expired On >> 4/9/2008", and "Friendly Name >>". At the bottom of the dialog box are "OK" and "Cancel" buttons.

① Use Client certificate : Client certificate for server authentication.


- EAP Fast -

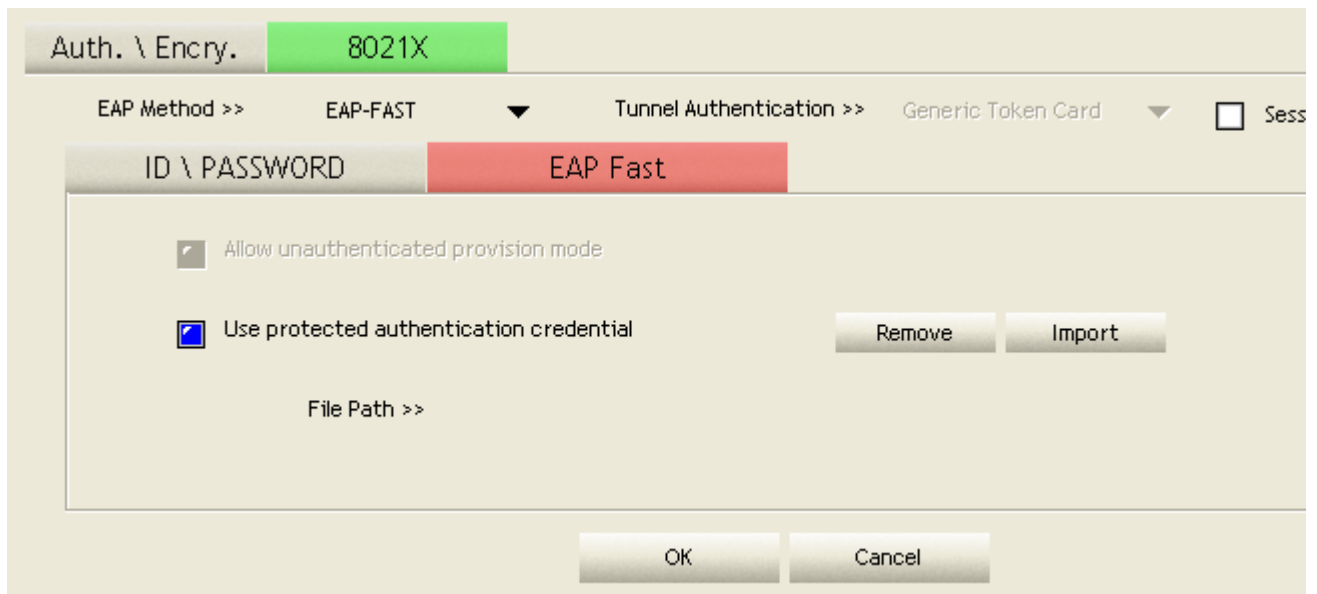

① Allow unauthenticated provision mode : During the PAC can be provisioned (distributed one time) to the client automatically. [It only supported "Allow unauthenticated provision mode" and use "EAP-MSCHAP v2" authentication to authenticate now.](#) It causes to continue with the establishment of the inner tunnel even though it is made with an unknown server.

② Use protected authentication credential : During the PAC can be provisioned to the client manually via disk or a secured network distribution method.

- Server Certification -

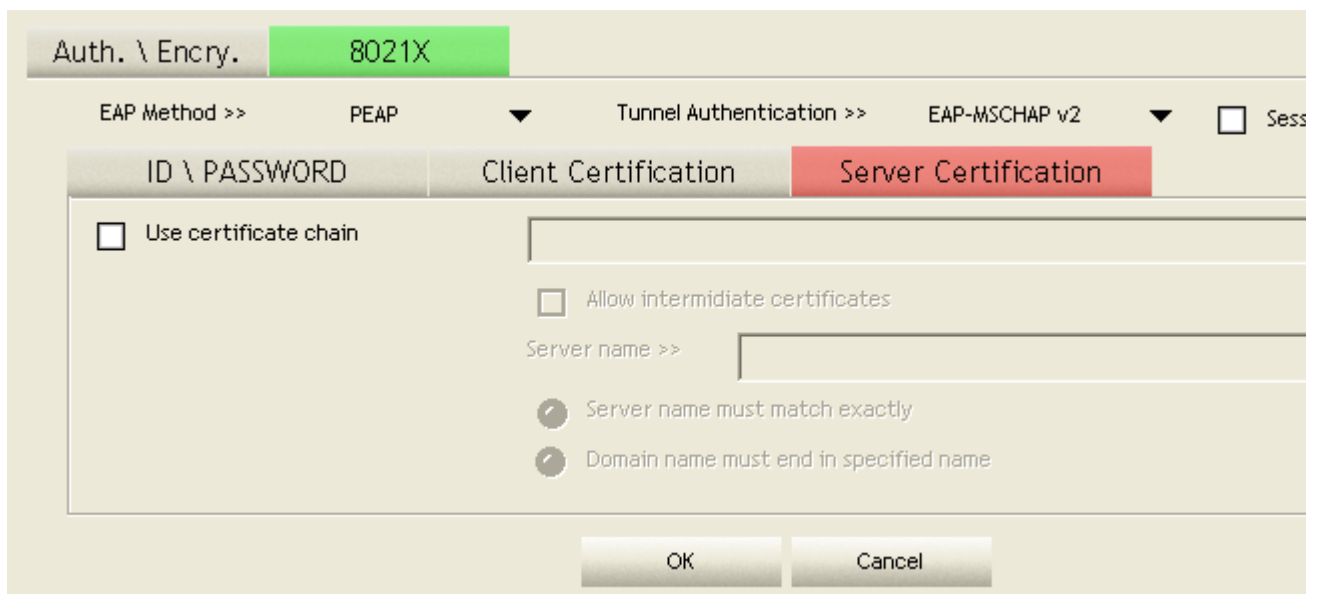

① Certificate issuer : Choose use server that issuer of certificates.

② Allow intimidate certificates : It must be in the server certificate chain between the server certificate and the server specified in the certificate issuer must be field.

③ Server name : Enter an authentication sever root.

Example to Reconnect 802.1x Authenticated Connection after 802.1x Authenticated connection Is Failed in Profile

There are two situations to be able to reconnect 802.1x authenticated connection and authenticate successfully after 802.1x authenticated connection is failed in profile page. Two examples about this case are as follows:

When keying in error identity, password or domain name :

① Authentication type chooses "PEAP", key identity into test. Tunnel Protocol is "EAP-MSCHAP-v2", and tunnel identity is test and tunnel password is test. Those setting are same as our intended AP's setting.

The screenshot shows the '8021X' configuration window. At the top, there are tabs: 'System Config', 'Auth. \ Encry.', and '8021X' (which is highlighted in green). Below the tabs, there are two dropdown menus: 'EAP Method >>' set to 'PEAP' and 'Tunnel Authentication >>' set to 'EAP-MSCHAP v2'. There is also a checkbox labeled 'Se'. Below these, there are three tabs: 'ID \ PASSWORD' (highlighted in red), 'Client Certification', and 'Server Certification'. Under the 'ID \ PASSWORD' tab, there are two sections: 'Authentication ID / Password' and 'Tunnel ID / Password'. In the 'Authentication ID / Password' section, the 'Identity >>' field contains 'test', the 'Password >>' field is empty, and the 'Domain Name >>' field is empty. In the 'Tunnel ID / Password' section, the 'Identity >>' field contains 'test' and the 'Password >>' field contains 'test'. At the bottom of the window, there are 'OK' and 'Cancel' buttons.

② Because keying error identity and error password, the result will look like the below figure.

The screenshot shows an 'Authentication Failure' dialog box. It has a light beige background. At the top, there are two fields: 'Card Name >>' with the value 'Ralink 802.11n Wireless LAN Card' and 'Identity >>' with an empty field. Below these, there are two more fields: 'Profile Name >>' with the value 'PROF1' and 'Password >>' with an empty field. At the bottom left, there is a 'Message >>' field with the text 'Invalid identity or password'. At the bottom right, there are 'OK' and 'Cancel' buttons.

③ If you want to disconnect, click cancel button in Authentication Failure dialog. If you want to reconnect, key identity into wpatest2. And tunnel identity is wpatest2 and tunnel password is test2. Those setting are same as our intended AP's setting.

Card Name >> Ralink 802.11n Wireless LAN Card

Profile Name >> PROF1

Message >> Invalid identity or password

Identity >> wpatest2

Password >> test2

OK Cancel

4 Click "OK" button. If it connected successfully, the result will look like the below figure..

RaUI

Profile | Network | Advanced | Statistics | WMM | WPS | Radio On/Off

Profile List

Profile Name	AP	Actions
PROF1	AP1	[Edit] [Delete]

Configuration Details:

- Profile Name >> PROF1
- SSID >> AP1
- Network Type >> Infrastructure
- Authentication >> WPA
- Encryption >> AES
- Use 802.1x >> YES
- Channel >> 6
- Power Save Mode >> CAM
- Tx Power >> Auto
- RTS Threshold >> 2347
- Fragment Threshold >> 2346

Status & Extra Info:

- Status >> AP1 <--> 00-03-7F-00-D7-A4
- Extra Info >> Link is Up [TxPower:100%]
- Channel >> 6 <--> 2437000 MHz
- Authentication >> WPA
- Encryption >> AES
- Network Type >> Infrastructure
- IP Address >> 192.168.5.91
- Sub Mask >> 255.255.255.0
- Default Gateway >> 192.168.5.254

HT (High Throughput) Settings:

- BW >> n/a
- GI >> n/a
- MCS >> n/a
- SNR0 >> n/a
- SNR1 >> n/a

Link Quality & Signal Strength:

- Link Quality >> 100%
- Signal Strength 1 >> 10
- Signal Strength 2 >> 10
- Signal Strength 3 >> 10
- Noise Strength >> 26

Transmit Statistics:

- Link Speed >> 54.0 Mbps
- Throughput >> 0.000 Kbps

Receive Statistics:

- Link Speed >> 54.0 Mbps
- Throughput >> 90.016 Kbps

Buttons: Add, Edit, Delete, Activate

When occurring "Timeout" :

① Authentication type chooses "PEAP", key identity into wpatest2. Tunnel Protocol is "EAP-MSCHAP-v2, and tunnel identity is wpatest2 and tunnel password is test2. Those setting are same as our intended AP's setting.

System Config Auth. \ Encry. **8021X**

EAP Method >> PEAP Tunnel Authentication >> EAP-MSCHAP v2 ☐ Ses

ID \ PASSWORD Client Certification Server Certification

Authentication ID / Password

Identity >> wpatest2 Password >> Domain Name >>

Tunnel ID / Password

Identity >> wpatest2 Password >> test2

OK Cancel

② Because occurring "Timeout", the result will look like the below figure.

Card Name >> Ralink 802.11n Wireless LAN Card

Profile Name >> PROF1

Message >> Unable to PEAP authenticate the wireless user in the specified amount of time. Network infrastructure might be down. Please press OK to reconnect.

OK Cancel

③ If it connected successfully, the result will look like the below figure.

RaUI

Profile
 Network
 Advanced
 Statistics
 WMM
 WPS
 Radio On/

Profile List

PROF1
AP1

Add
Edit
Delete
Activate

Profile Name >> PROF1
SSID >> AP1
Network Type >> Infrastructure
Authentication >> WPA
Encryption >> AES
Use 802.1x >> YES
Channel >> 6
Power Save Mode >> CAM
Tx Power >> Auto
RTS Threshold >> 2347
Fragment Threshold >> 2346

Status >> AP1 <--> 00-03-7F-00-D7-A4
Extra Info >> Link is Up [TxPower:100%]
Channel >> 6 <--> 2437000 MHz
Authentication >> WPA
Encryption >> AES
Network Type >> Infrastructure
IP Address >> 192.168.5.91
Sub Mask >> 255.255.255.0
Default Gateway >> 192.168.5.254

HT

BW >> n/a
GI >> n/a

MCS >> n/a

SNR0 >> n/a
SNR1 >> n/a

Link Quality >> 100%
Signal Strength 1 >> 10
Signal Strength 2 >> 10
Signal Strength 3 >> 10
Noise Strength >> 26

Transmit

Link Speed >> 54.0 Mbps
Throughput >> 0.000 Kbps

Receive

Link Speed >> 54.0 Mbps
Throughput >> 90.016 Kbps

Example to Configure Connection with WEP on

- 1 Select AP with WEP encryption and click "Connect" button.

The screenshot shows the RaUI interface with the 'Network' tab selected. The 'AP List' table displays various access points, with 'arcsadre' selected. Below the table, the 'Status' and 'Extra Info' sections provide details about the selected AP, including its MAC address, channel, and encryption status. The 'Transmit' and 'Receive' sections show link quality, signal strength, and throughput.

AP List >>				
202	1	b g	60%	
219	1	b g	65%	
230	2	b g	50%	
243	5	b g	81%	
99	6	b g n	81%	
AP1	6	b g	100%	
arcsadre	1	b g n	100%	
Broadcom	11	b g	60%	
BroadcomWPS	1	b g	60%	
BUFFALO_A	44	a n	29%	

Rescan Add to Profile Connect

Status >> arcsadre <--> 00-0C-43-28-70-11
Extra Info >> Link is Up [TxPower:100%]
Channel >> 1 <--> 2412000 MHz; central channel : 3
Authentication >> Unknown
Encryption >> None
Network Type >> Infrastructure
IP Address >> 169.254.73.184
Sub Mask >> 255.255.0.0
Default Gateway >> HT


Link Quality >> 100%
Signal Strength 1 >> 1
Signal Strength 2 >> 10
Signal Strength 3 >> 0
Noise Strength >> 26

Transmit
Link Speed >> 270.0 Mbps
Throughput >> 0.000 Mbps


Receive
Link Speed >> 1.0 Mbps
Throughput >> 0.026 Mbps

BW >> 40 SNR0 >> n/a
GI >> long MCS >> 15 SNR1 >> n/a

- 2 Auth. \ Encry. function pop up.

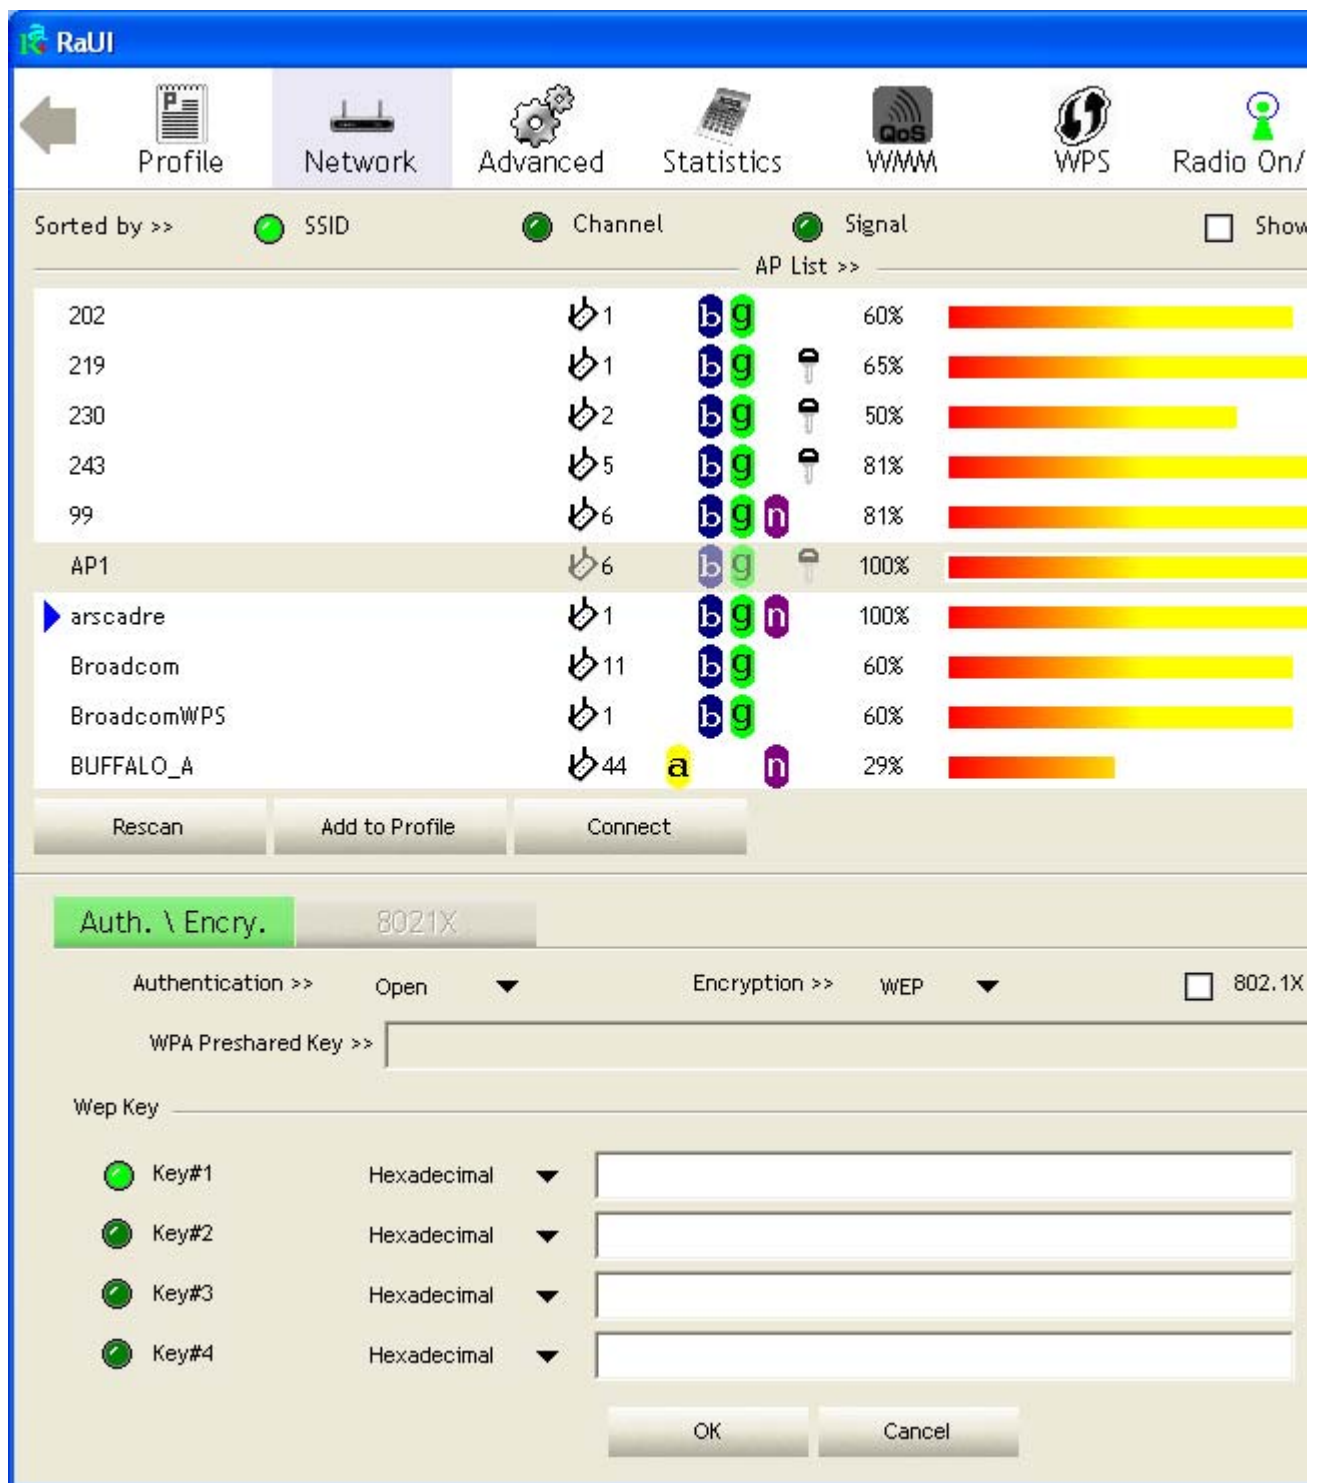

3 Enter 1234567890 at Key#1 which is same as our intended AP's setting.

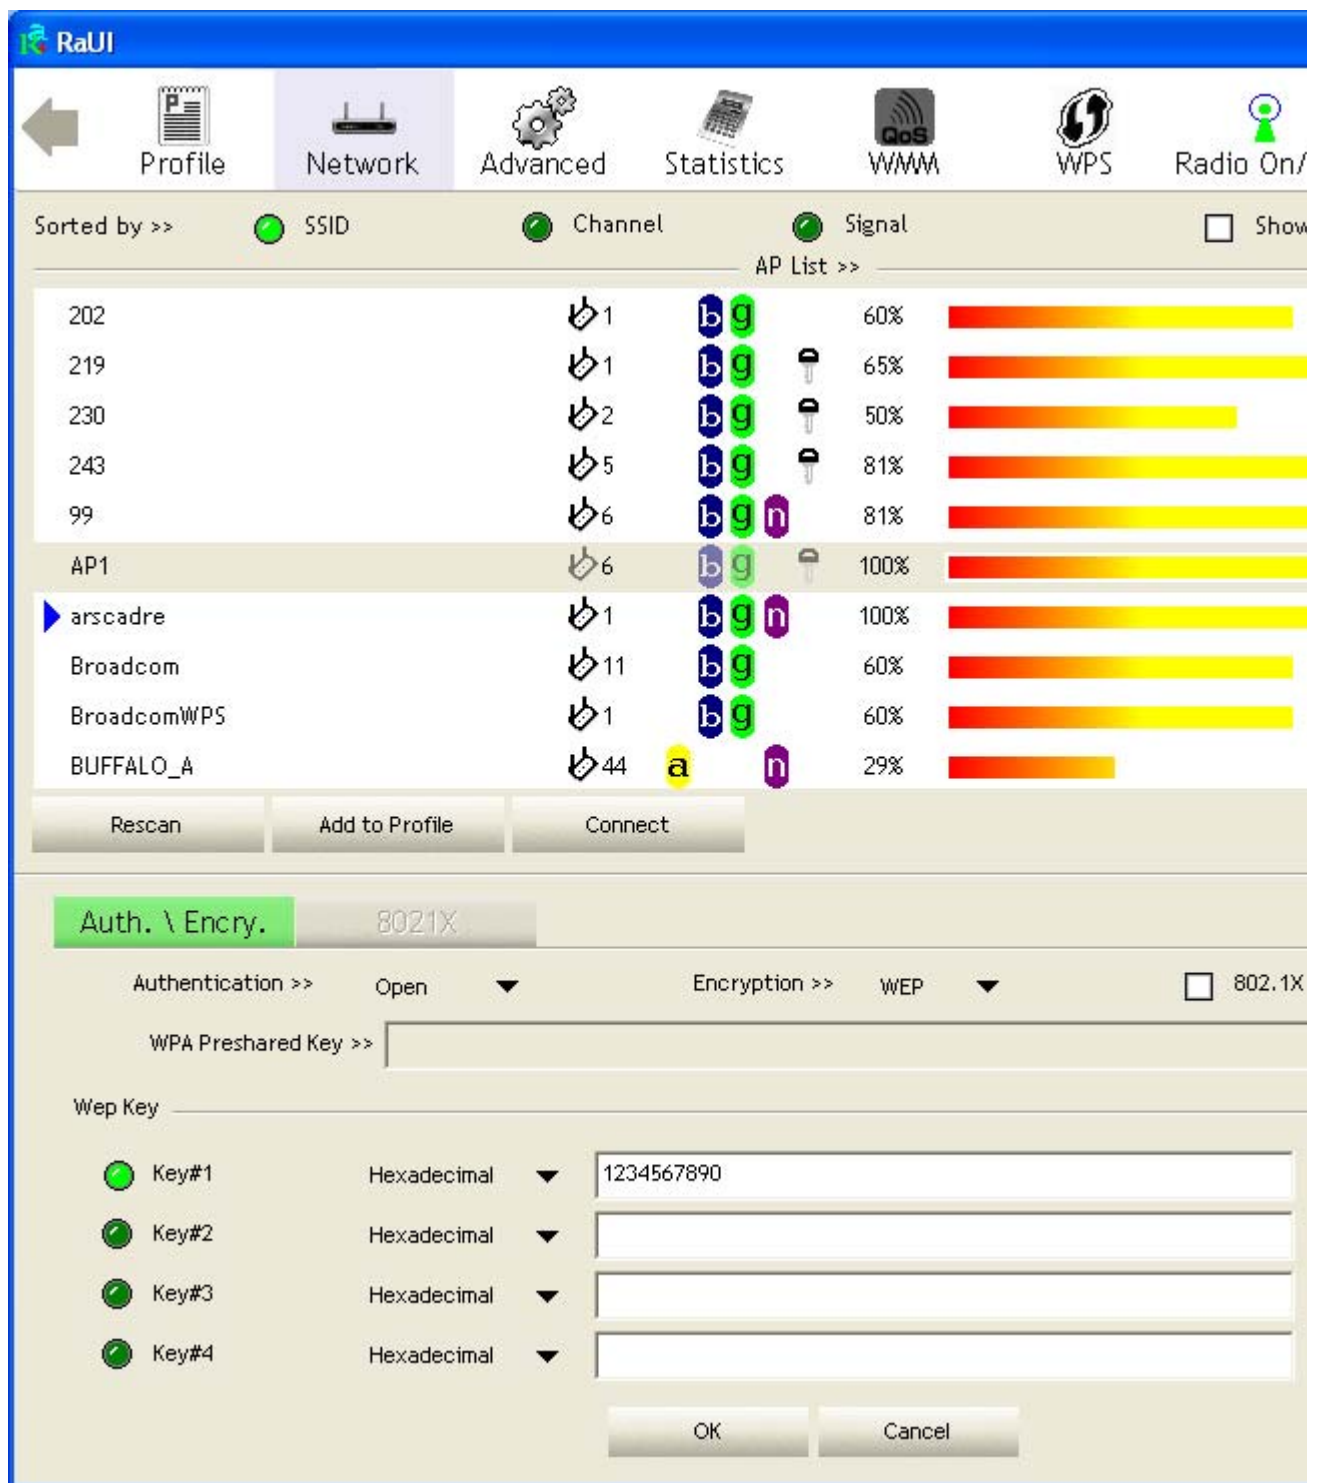

4 Click "OK" button. The result will look like the below figure.

RaUI

Profile
Network
Advanced
Statistics
WMM
WPS
Radio On/

Sorted by >>
SSID
Channel
Signal
Show

AP List >>

219	1	bg	76%	
223	1	bg	50%	
243	5	bg	94%	
99	6	bg n	65%	
_Shiang_2860AP	11	bg n	60%	
AP1	6	bg	100%	
arscadre	1	bg n	89%	
BroadcomWPS	1	bg	70%	
BUFFALO_A	44	a n	44%	
ClaudeAP	1	bg	60%	

Rescan
Add to Profile
Connect

Status >> AP1 <--> 00-03-7F-00-D7-A4
Extra Info >> Link is Up [TxPower:100%]
Channel >> 6 <--> 2437000 MHz
Authentication >> Unknown
Encryption >> WEP
Network Type >> Infrastructure
IP Address >> 192.168.5.113
Sub Mask >> 255.255.255.0
Default Gateway >> 192.168.5.254
HT

Link Quality >> 98%
Signal Strength 1 >> 5
Signal Strength 2 >> 10
Signal Strength 3 >> 3
Noise Strength >> 26

Transmit
Link Speed >> 54.0 Mbps
Throughput >> 0.000 Mbps

Receive
Link Speed >> 54.0 Mbps
Throughput >> 0.022 Mbps

BW >> n/a
GI >> n/a

MCS >> n/a
SNR1 >> n/a

SNR0 >> n/a

Example to Configure Connection with WPA-PSK


- 1 Select the AP with WPA-PSK authentication mode and click "Connect" button.

The screenshot shows the RaUI Network tab with the following components:


- Navigation Bar:** Profile, Network (selected), Advanced, Statistics, WMM, WPS, Radio On/Off.
- Sort Options:** Sorted by >> SSID, Channel, Signal. AP List >> Show.
- AP List Table:**

SSID	Channel	Security	Signal	Bar
0148-1	60	a	20%	
11n	1	b g n	50%	
132	2	b g	60%	
202	1	b g	60%	
219	1	b g	76%	
243	5	b g	91%	
99	6	b g n	81%	
_Shiang_2860AP	11	b g n	65%	
AP1	6	b g	100%	
arscadre	1	b g n	99%	
- Buttons:** Rescan, Add to Profile, Connect.
- Status >> arscadre <--> 00-0C-43-28-70-11**
- Extra Info >> Link is Up [TxPower:100%]**
- Channel >> 1 <--> 2412000 MHz; central channel : 3**
- Authentication >> Open**
- Encryption >> NONE**
- Network Type >> Infrastructure**
- IP Address >> 0.0.0.0**
- Sub Mask >> 0.0.0.0**
- Default Gateway >>**
- HT**
- Transmit:**
 - Link Speed >> 270.0 Mbps
 - Throughput >> 0.000 Mbps
- Receive:**
 - Link Speed >> 54.0 Mbps
 - Throughput >> 0.012 Mbps
- Link Quality >> 100%**
- Signal Strength 1 >> 1**
- Signal Strength 2 >> 9**
- Signal Strength 3 >> 0**
- Noise Strength >> 26**


- 2 Auth. \ Encry. function pop up. (If AP setup security to Both (TKIP + AES), system defines is AES that security is severely.)

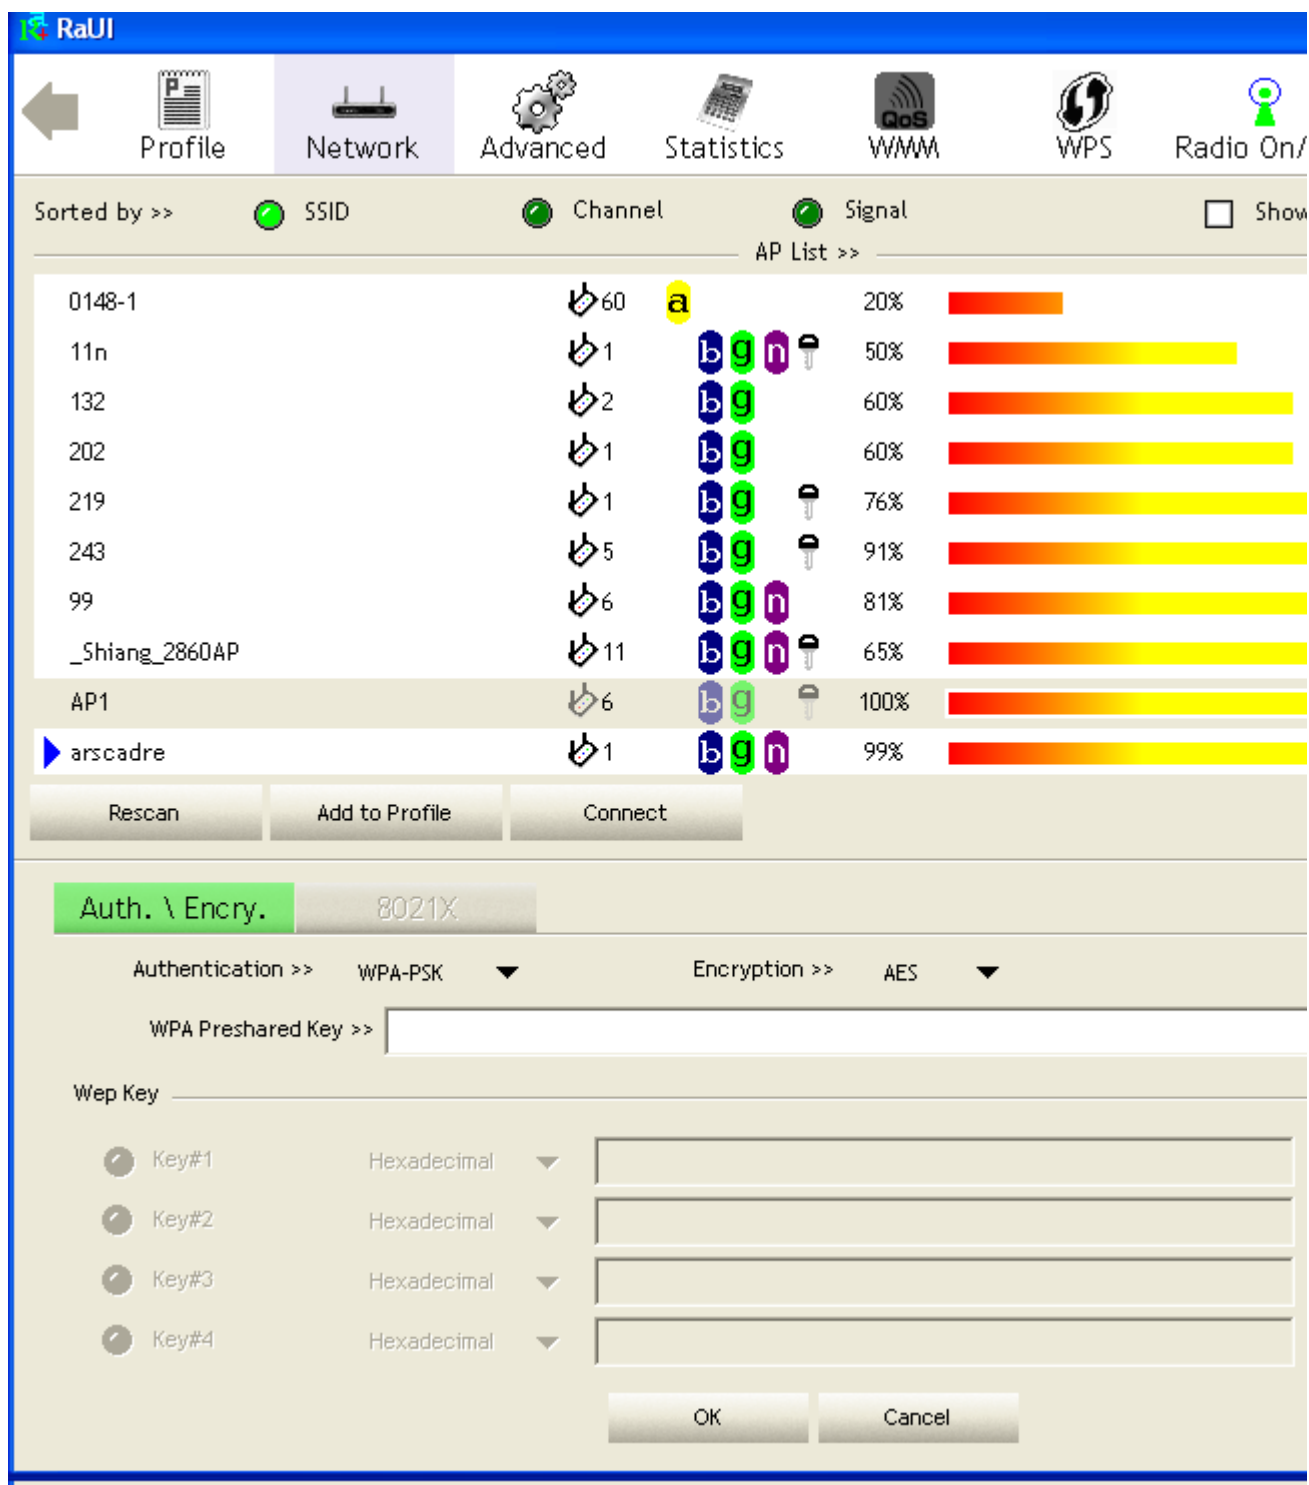

3 Authentication Type is WPA-PSK. Select correct encryption (TKIP or AES). Enter WPA Pre-Shared Key secret as 12345678.

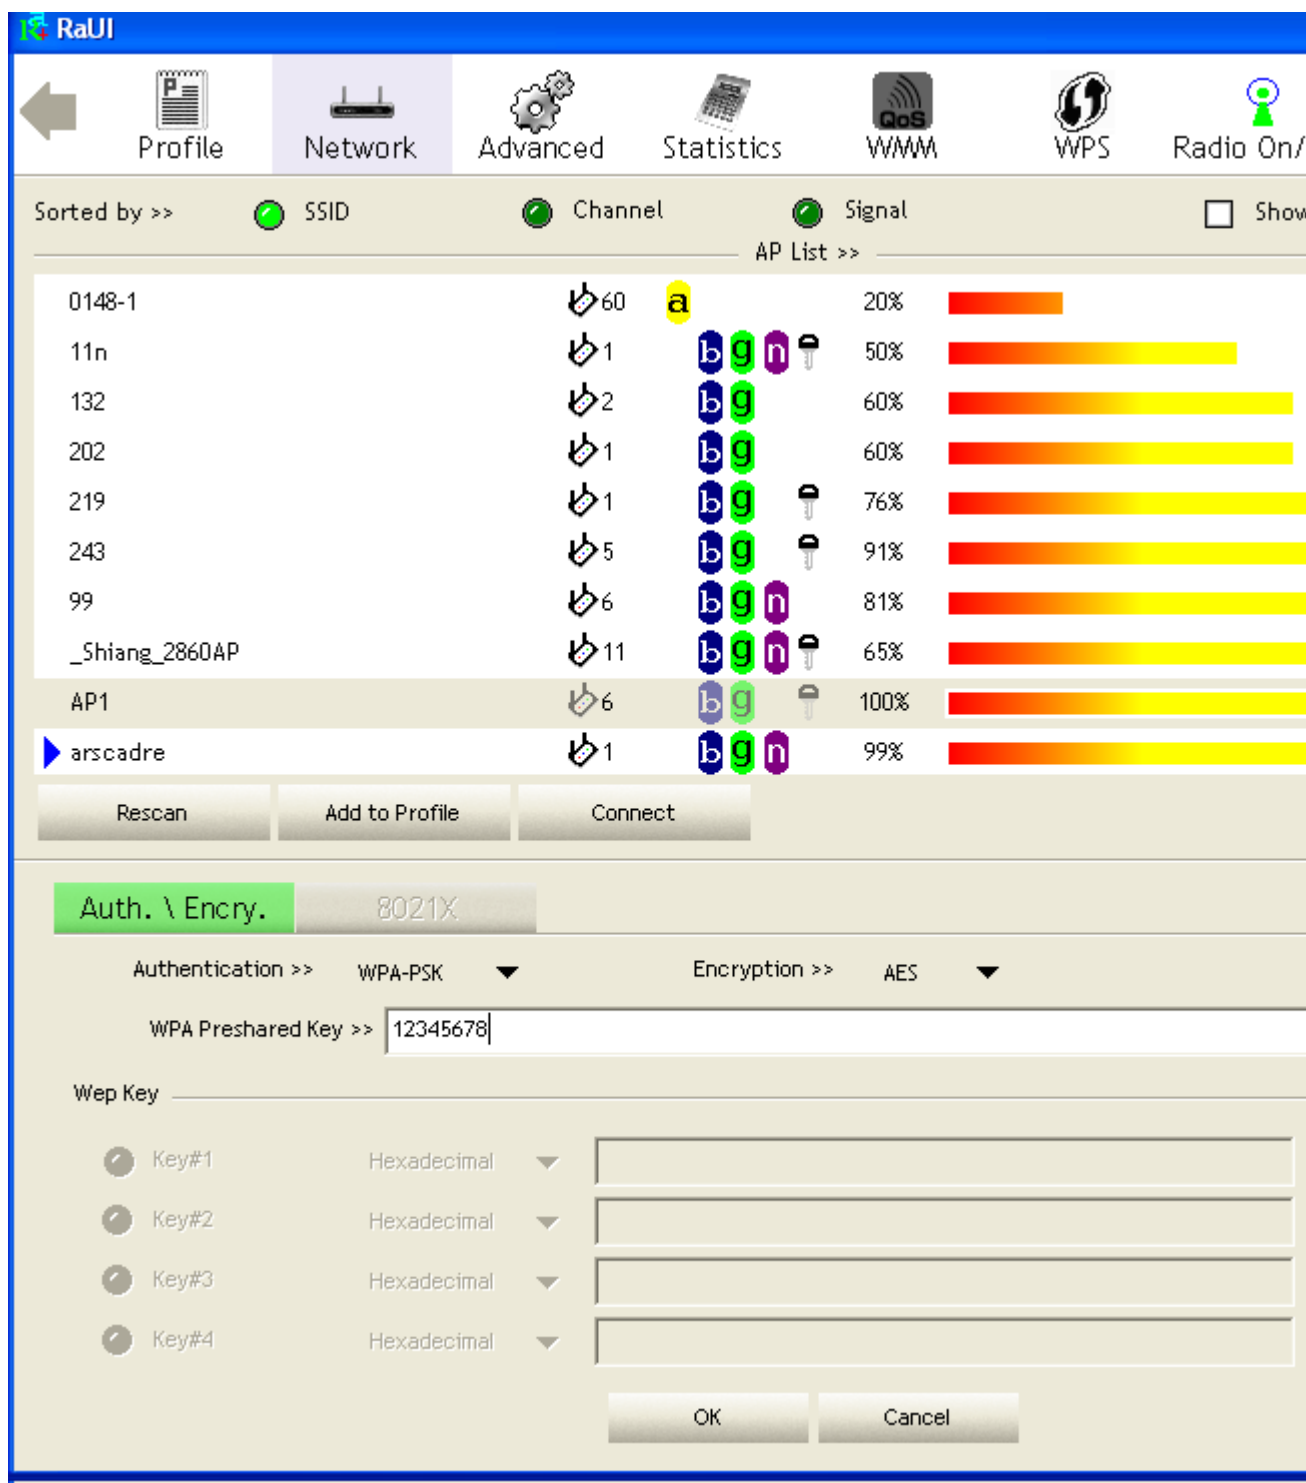

4 Click "OK" button. Be careful, if the WPA Pre-Shared Key entered is not correct, even though the AP can be connected, but you won't be able to exchange any data frames.

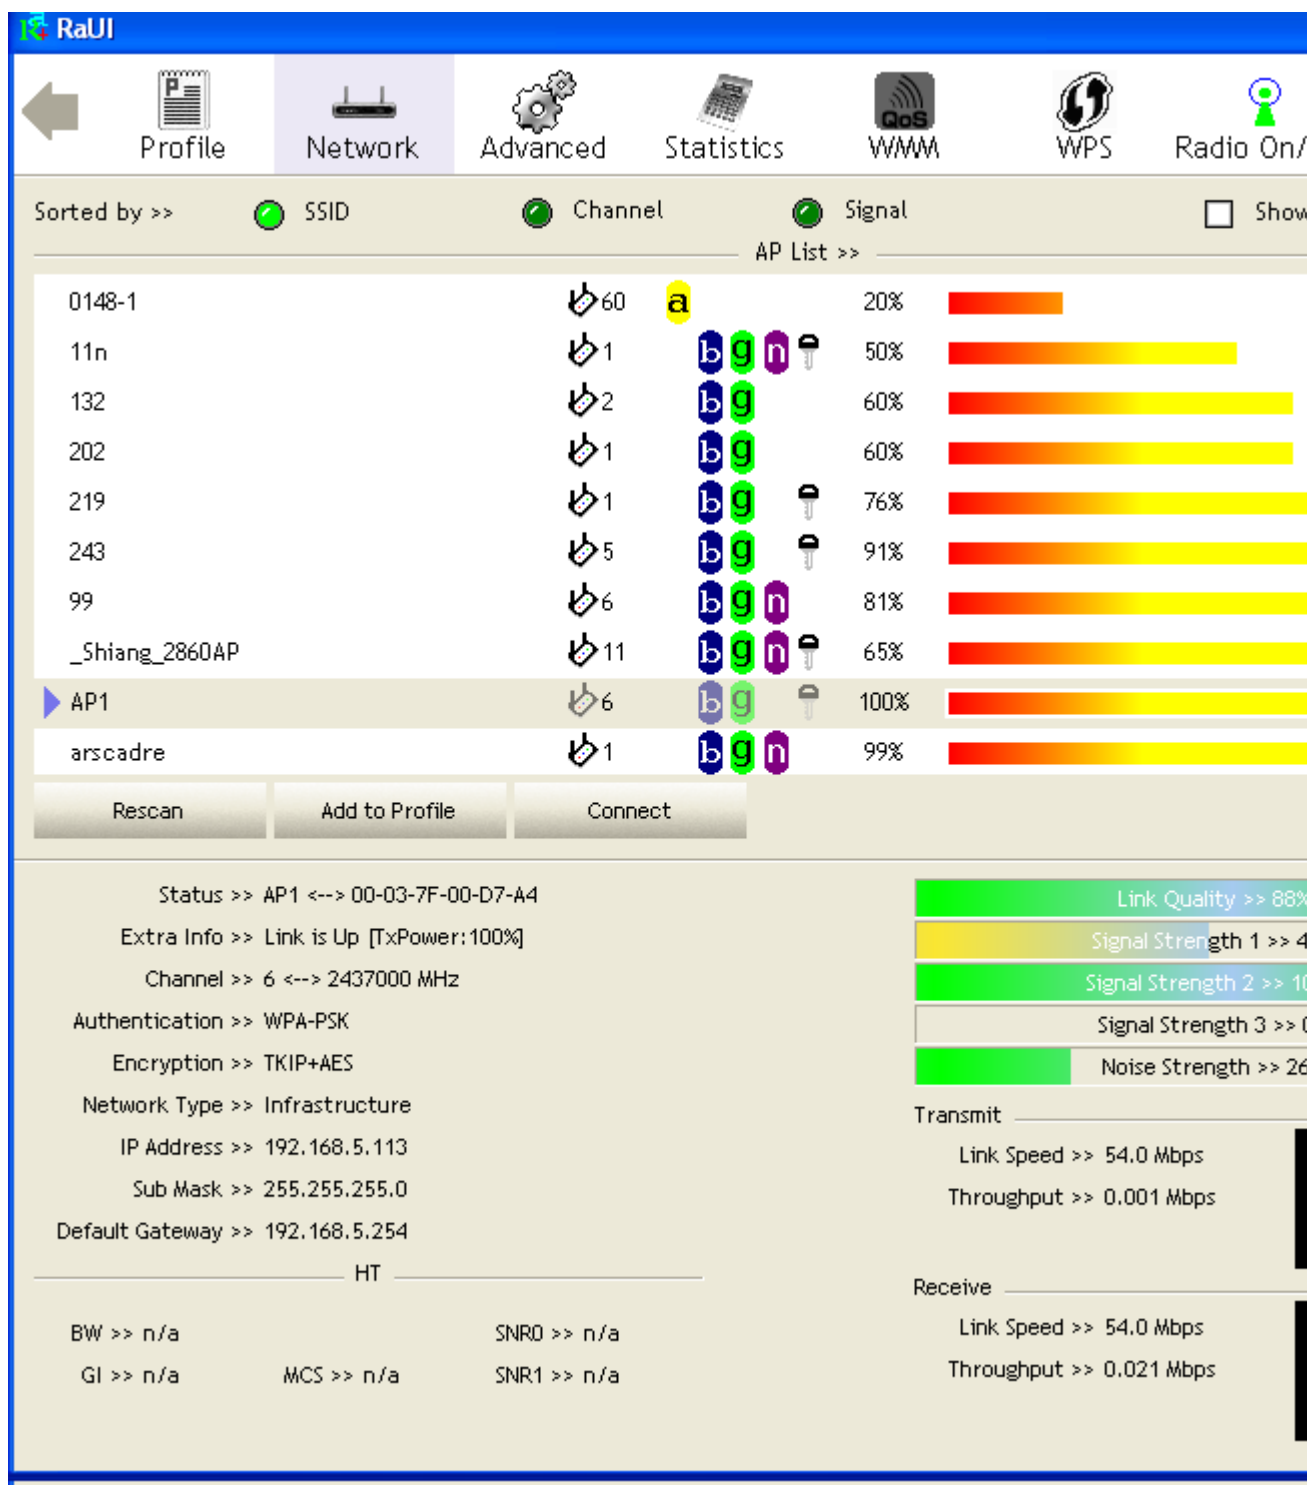

Example to Configure Connection with WPA


- 1 Select AP with WPA authentication mode and click "Connect" button.

The screenshot shows the RaUI Network tab interface. At the top, there are navigation tabs: Profile, Network (selected), Advanced, Statistics, WMM, WPS, and Radio On/Off. Below the tabs, there are sorting options: Sorted by >>, SSID, Channel, and Signal. A checkbox for 'Show' is also present. The main area displays an 'AP List >>' table with columns for AP Name, Channel, Security, Signal, and a visual signal strength bar.


AP Name	Channel	Security	Signal	Visual Bar
223	11	b g	65%	[Bar]
240	11	b g n	91%	[Bar]
243	4	b g	29%	[Bar]
99	6	b g n	91%	[Bar]
_Shiang_2860AP	11	b g n	91%	[Bar]
Ap-03	11	b g	70%	[Bar]
AP1	6	b g	100%	[Bar]
AP47-g	1	b g	29%	[Bar]
arscadre	1	b g n	100%	[Bar]
arvint-2860AP	7	b g n	86%	[Bar]

Below the table are three buttons: Rescan, Add to Profile, and Connect. The bottom section of the interface shows configuration options for the selected AP (AP1). On the left, there are expandable sections: Status >> (Disconnected), Extra Info >>, Channel >>, Authentication >>, Encryption >>, Network Type >>, IP Address >>, Sub Mask >>, and Default Gateway >>. On the right, there are sections for Link Quality >> (0%), Signal Strength 1 >>, Signal Strength 2 >>, Signal Strength 3 >>, Noise Strength >>, Transmit (Link Speed >>, Throughput >>), and Receive (Link Speed >>, Throughput >>).

- 2 Auth. \ Encry. function pop up. (If AP setup security to Both (TKIP + AES), system defines is AES that security is severely.)

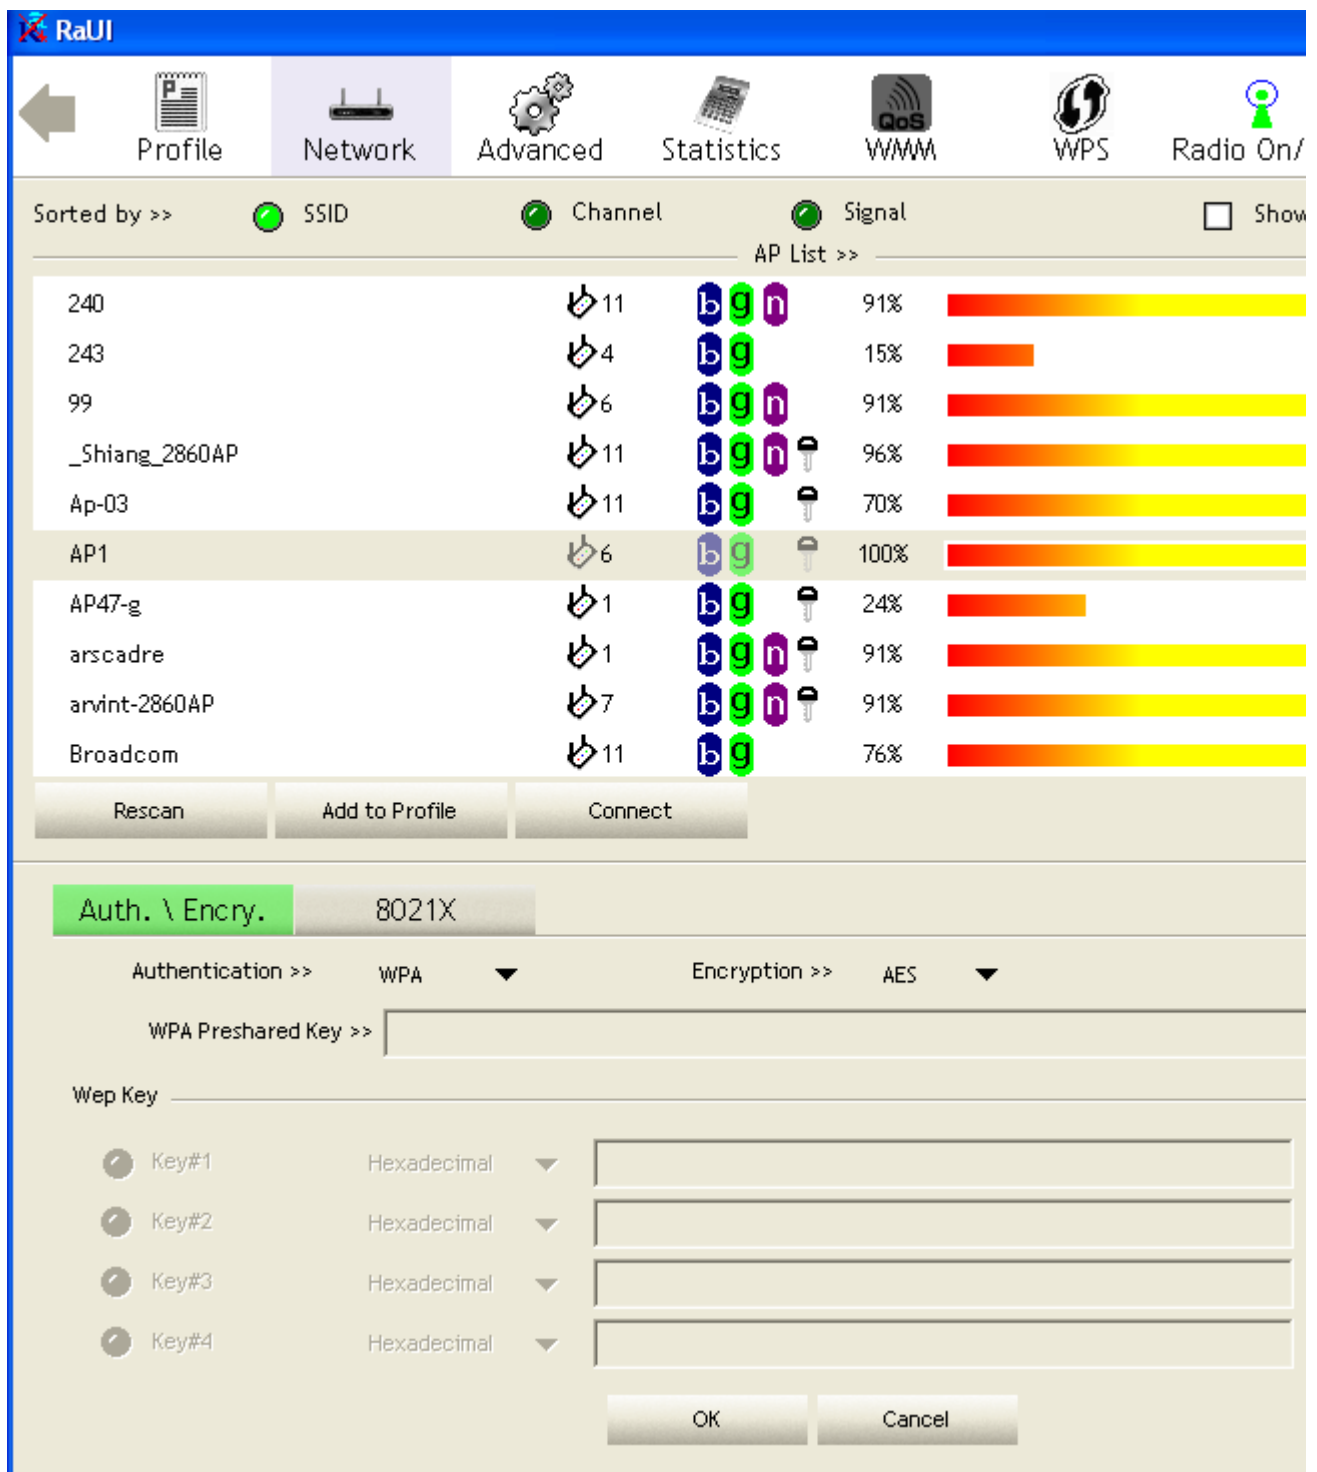


- 3 Click "8021X" button and 802.1x setting page will pop up.

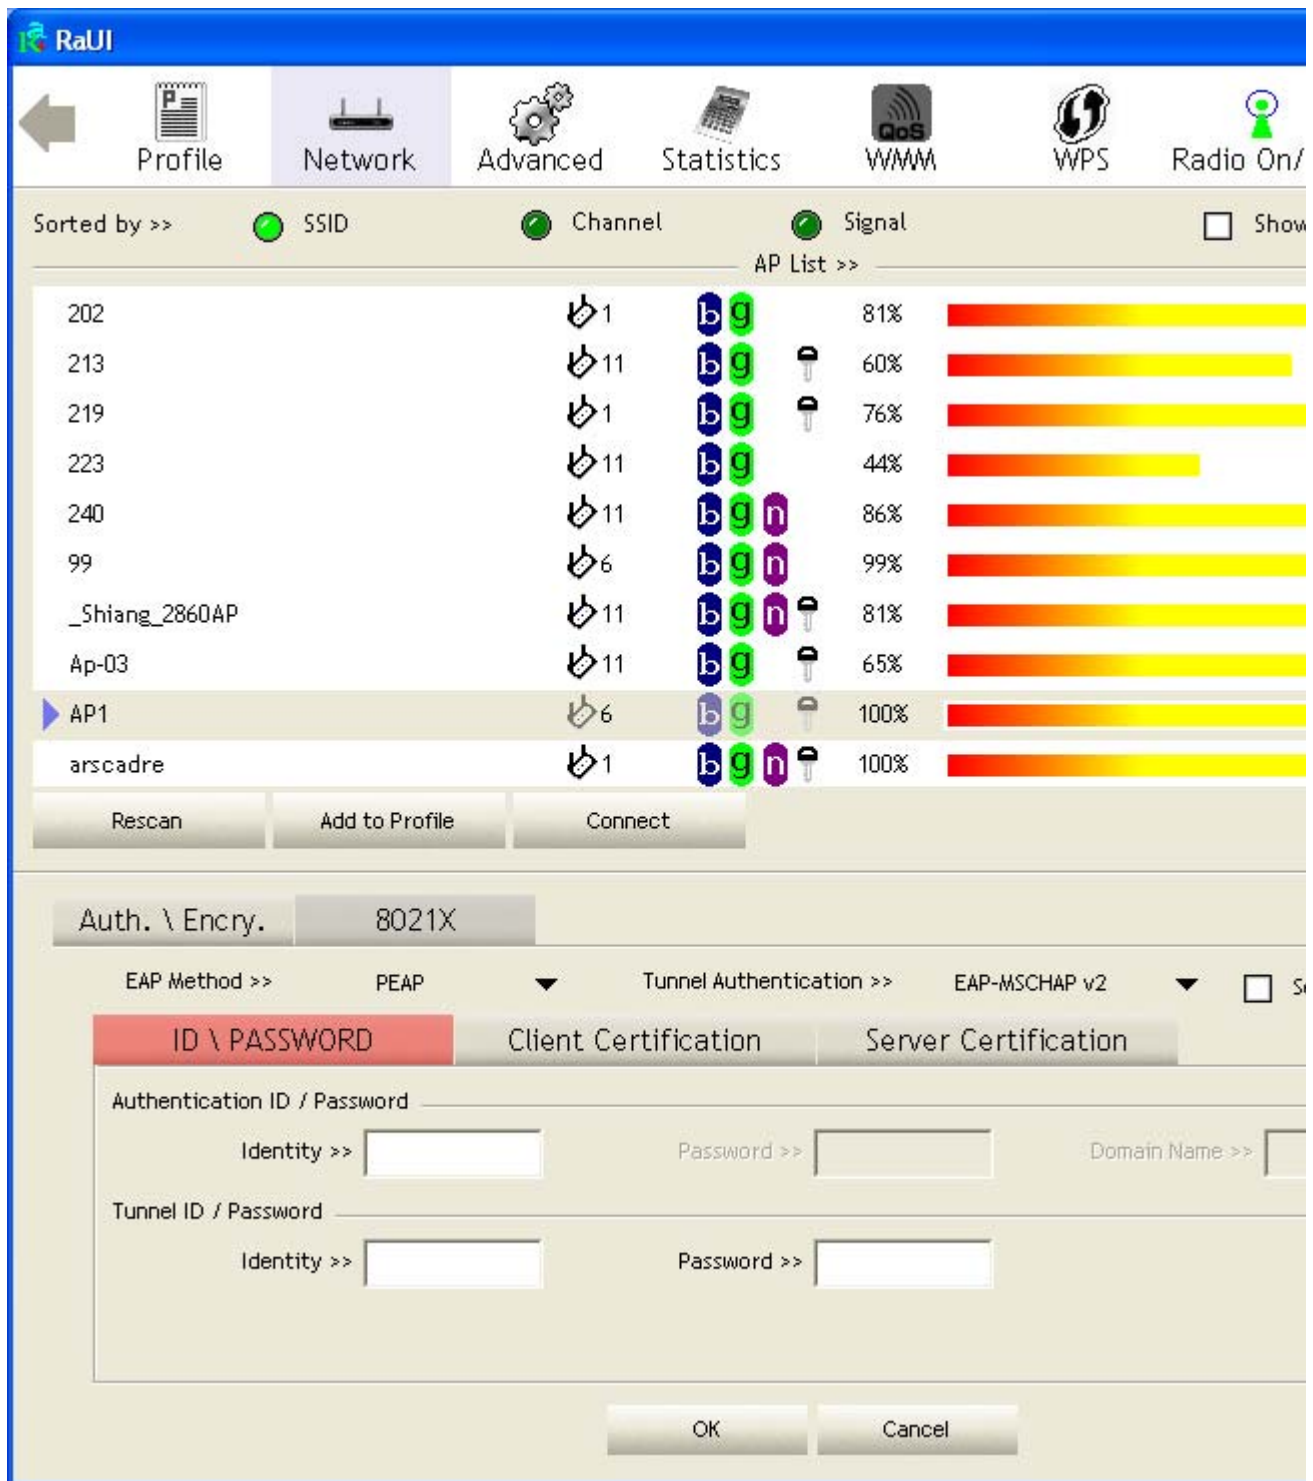


4 Authentication type and setting method :

PEAP :

1. Authentication type chooses PEAP, key identity into wpatest2. Protocol chooses EAP-MSCHAP v2 for tunnel authentication, tunnel identity is wpatest2 and tunnel password is test2. Those setting are same as our intended AP's setting.

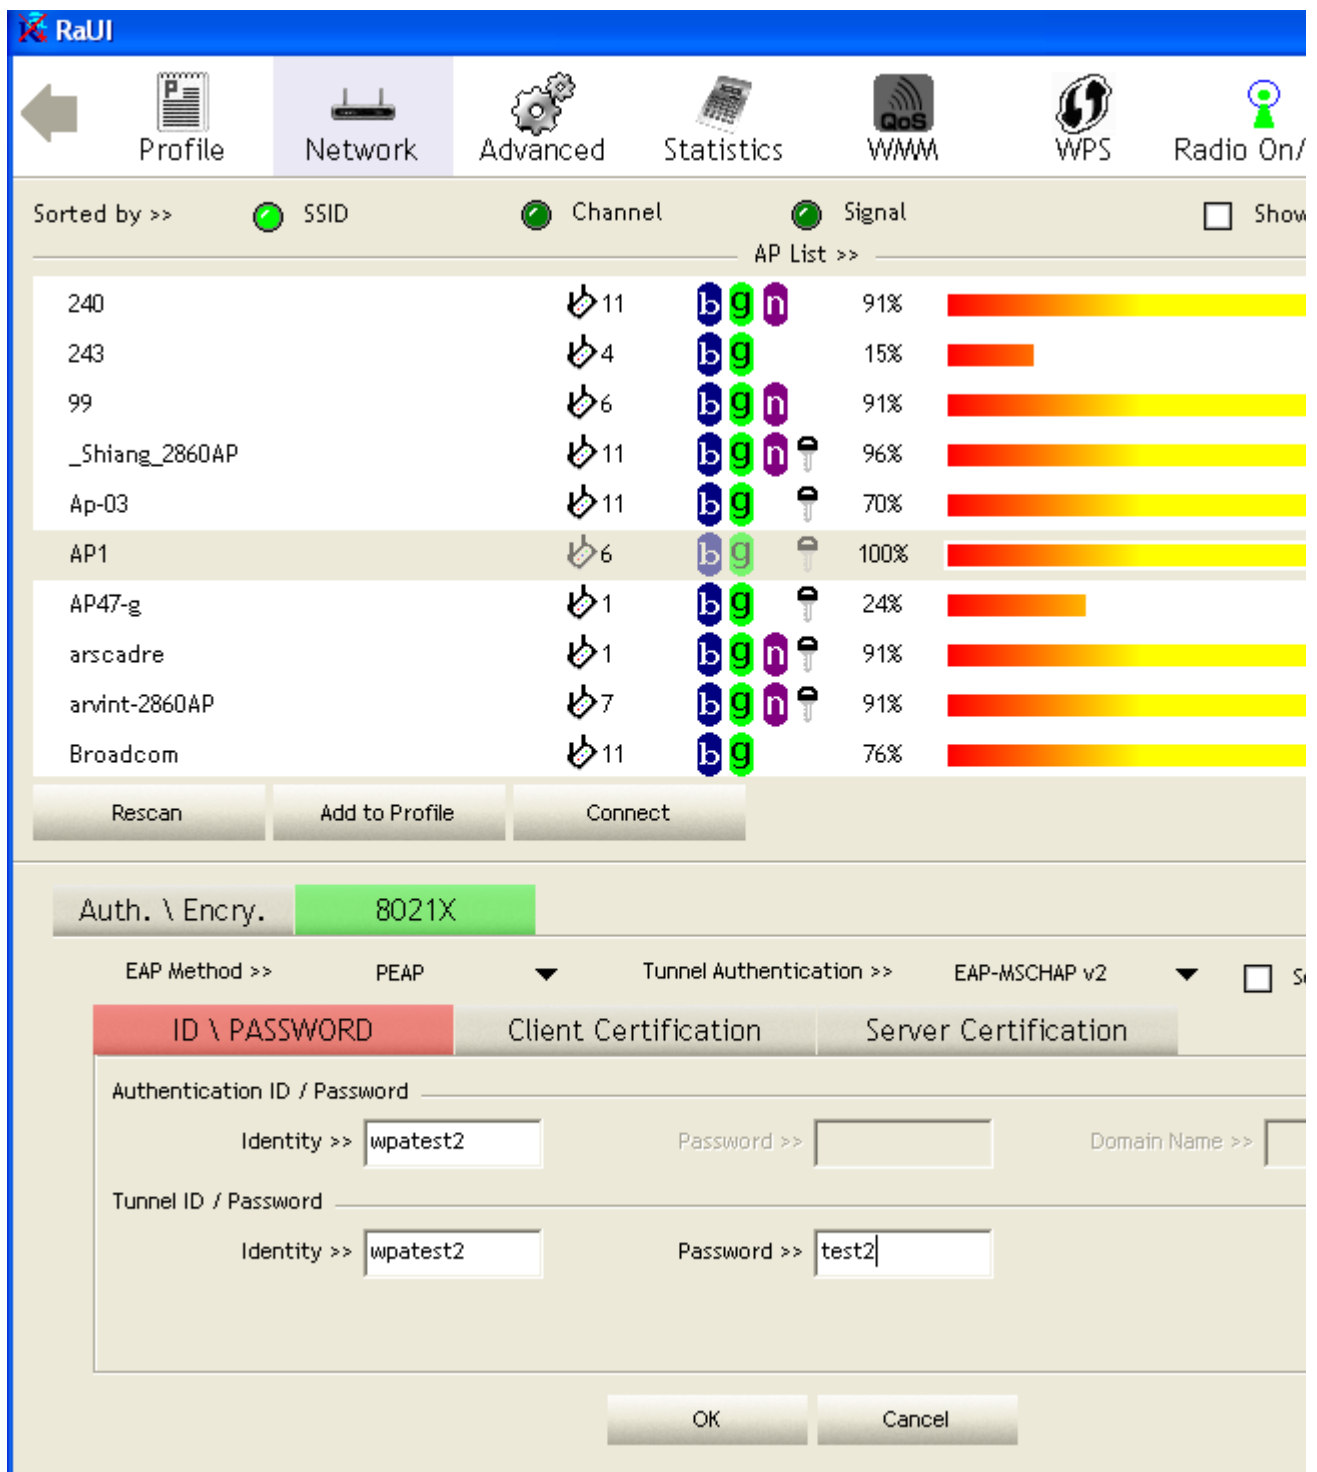

2. Click OK. The result will look like the below figure.

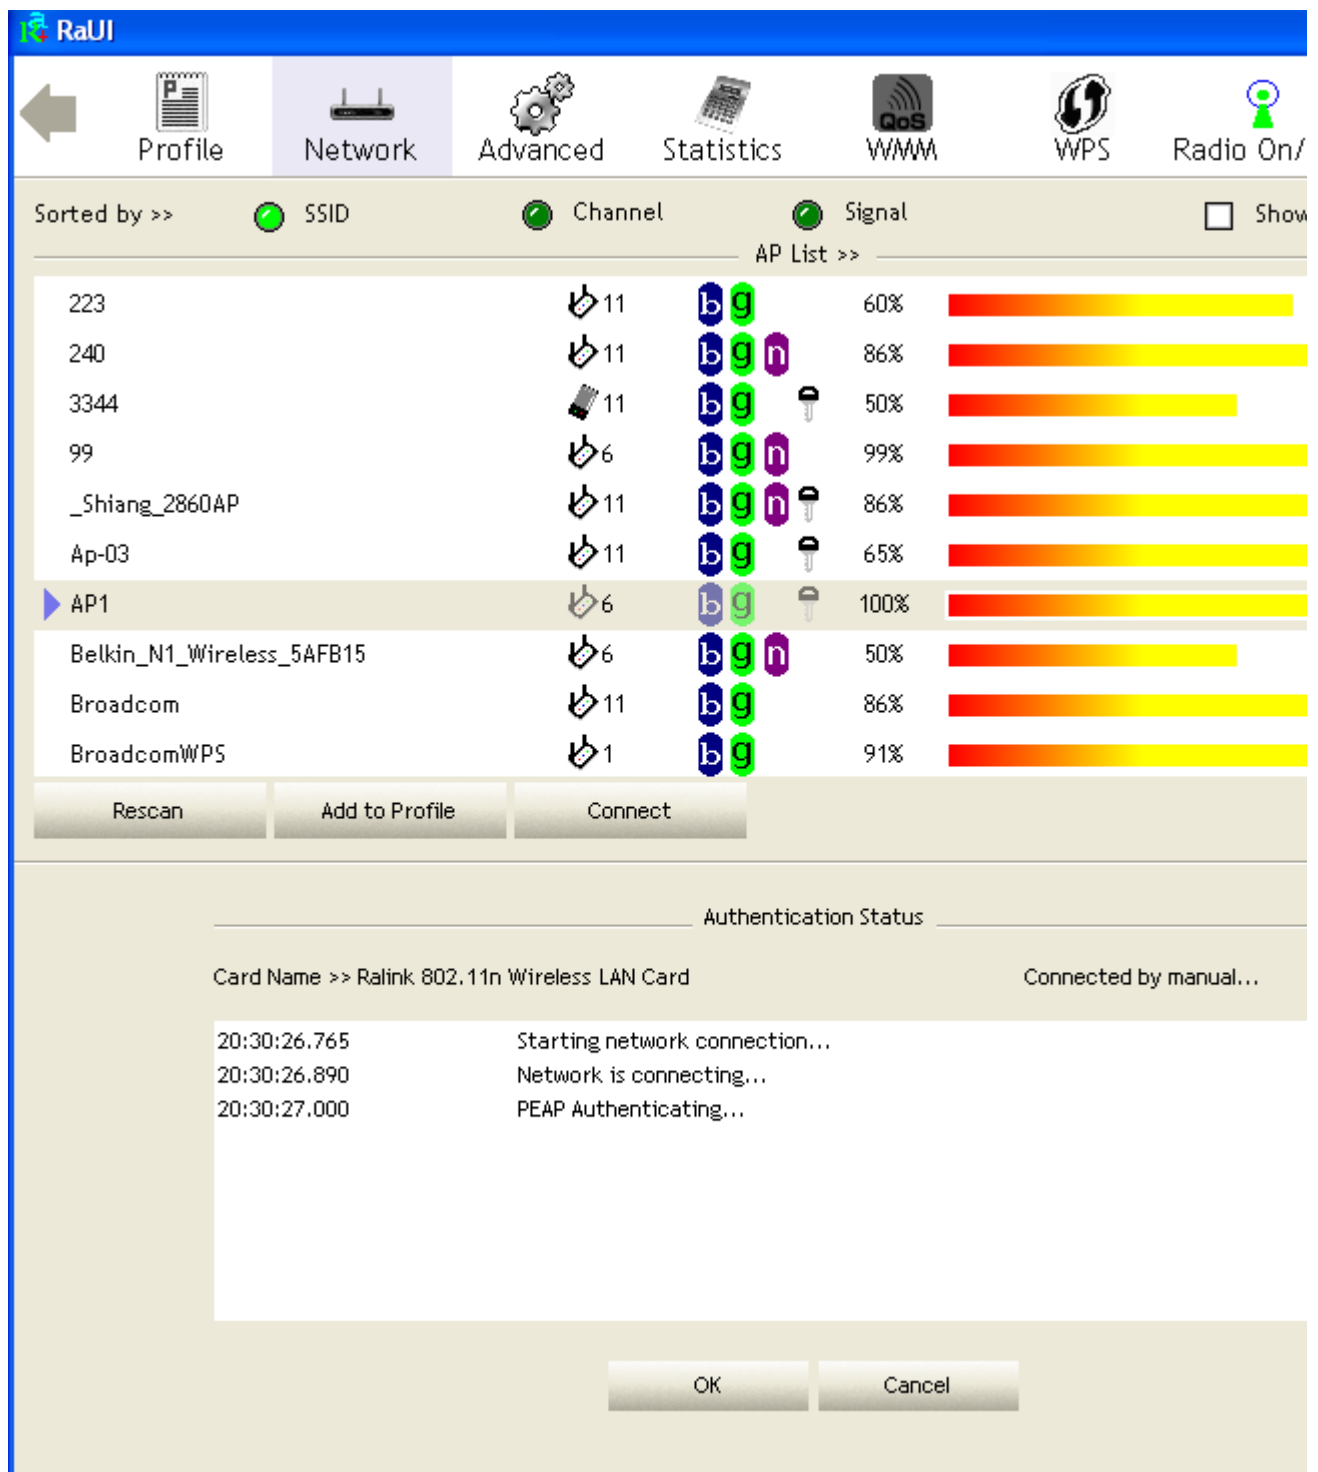

- *If you want to disconnect, please click cancel button in Authentication Status function.
- *In Profile function, show "Profile Name" option only in adding AP to Profile function.

3. If it connected successfully, the result will look like the below figure.

The screenshot shows the RaUI interface with the 'Network' tab selected. It displays a list of detected Access Points (APs) with columns for SSID, Channel, Signal, and a visual signal strength bar. The 'AP1' entry is selected, and its details are shown below the list.

Sorted by >>	SSID	Channel	Signal	Show
AP List >>				
202	1	b g	81%	
213	11	b g	60%	
219	1	b g	76%	
223	11	b g	44%	
240	11	b g n	86%	
99	6	b g n	99%	
_Shiang_2860AP	11	b g n	81%	
Ap-03	11	b g	65%	
AP1	6	b g	100%	
arscadre	1	b g n	100%	

Buttons: Rescan, Add to Profile, Connect

Status >> AP1 <--> 00-03-7F-00-D7-A4

Extra Info >> Link is Up [TxPower:100%]

Channel >> 6 <--> 2437000 MHz

Authentication >> WPA

Encryption >> TKIP+AES

Network Type >> Infrastructure

IP Address >> 192.168.5.79

Sub Mask >> 255.255.255.0

Default Gateway >> 192.168.5.254

HT

Transmit

Link Speed >> 54.0 Mbps

Throughput >> 0.000 Kbps

Receive

Link Speed >> 54.0 Mbps

Throughput >> 57.148 Kbps

Link Quality >> 89%

Signal Strength 1 >> 10

Signal Strength 2 >> 10

Signal Strength 3 >> 10

Noise Strength >> 26

BW >> n/a

GI >> n/a


MCS >> n/a

SNR0 >> n/a


SNR1 >> n/a

TLS / Smart Card :


1. Authentication type chooses TLS / Smart Card, TLS only need identity that is wpatest2 for server authentication.

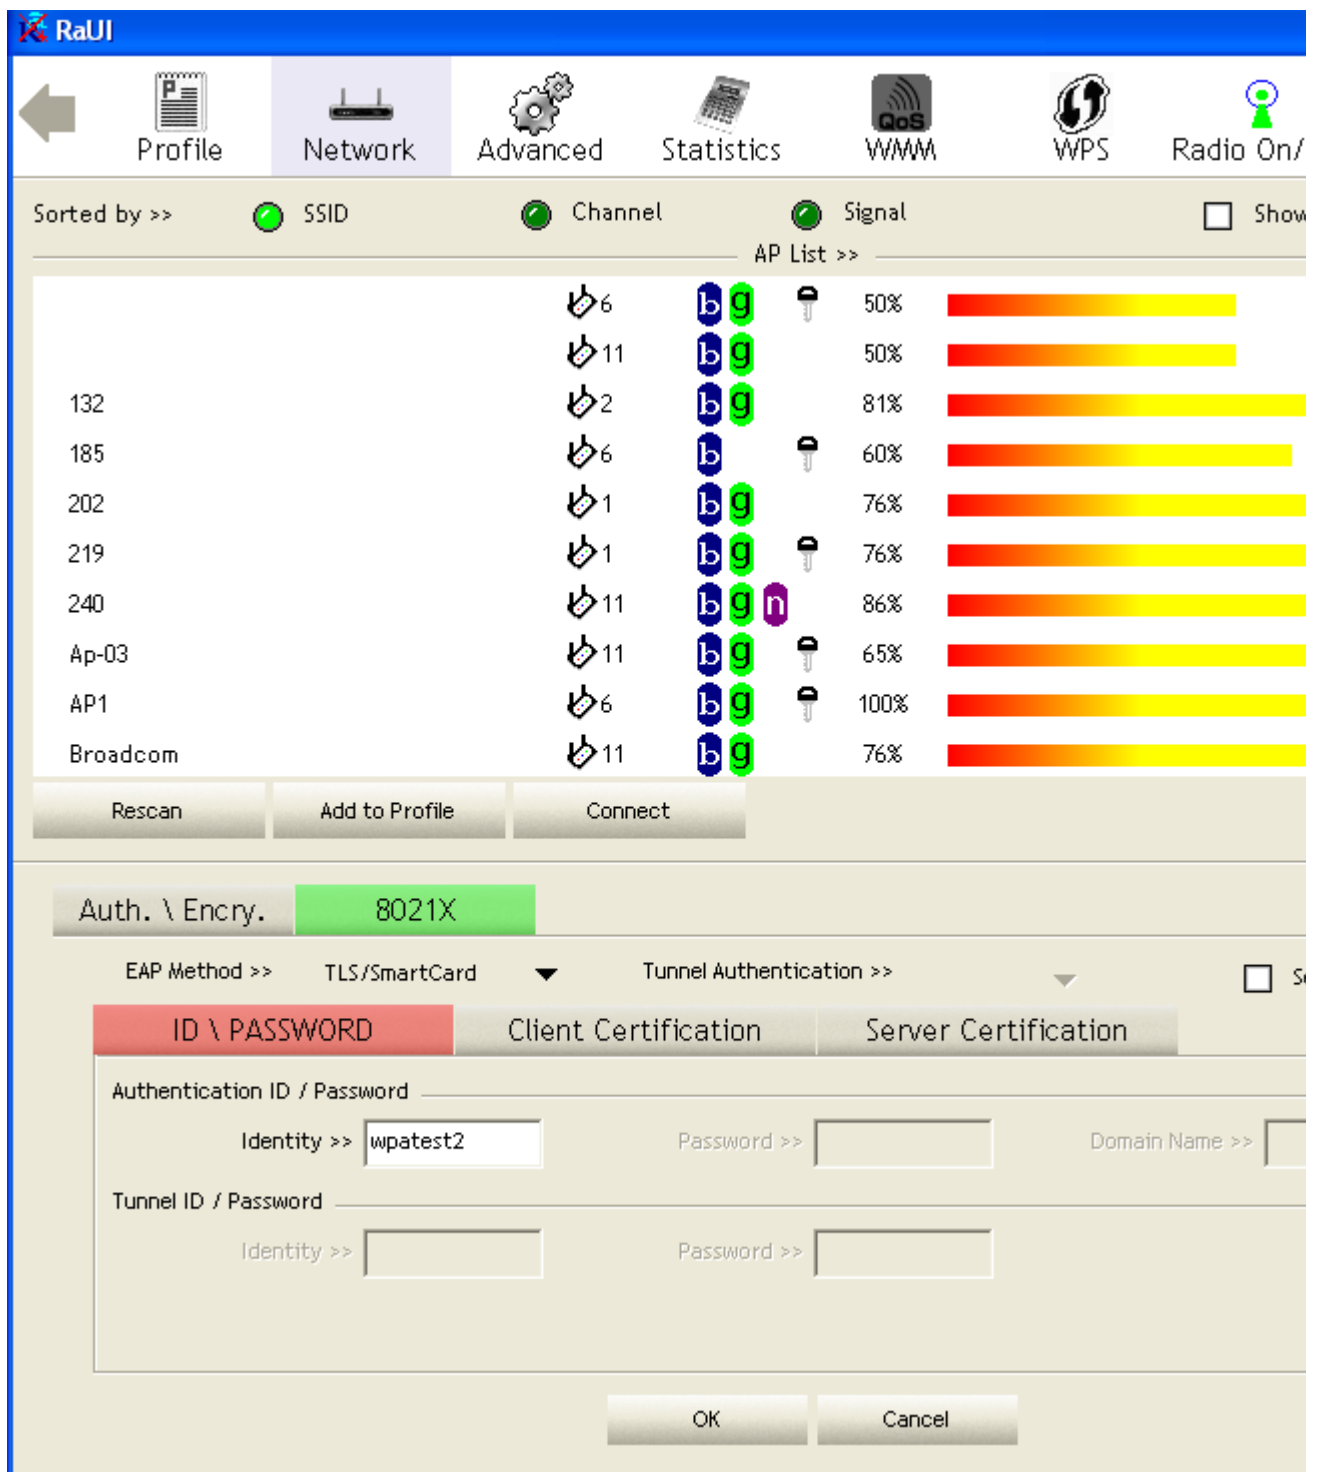

2. TLS must use client certification. Click "Client Certification" button and choose a certification for server authentication.

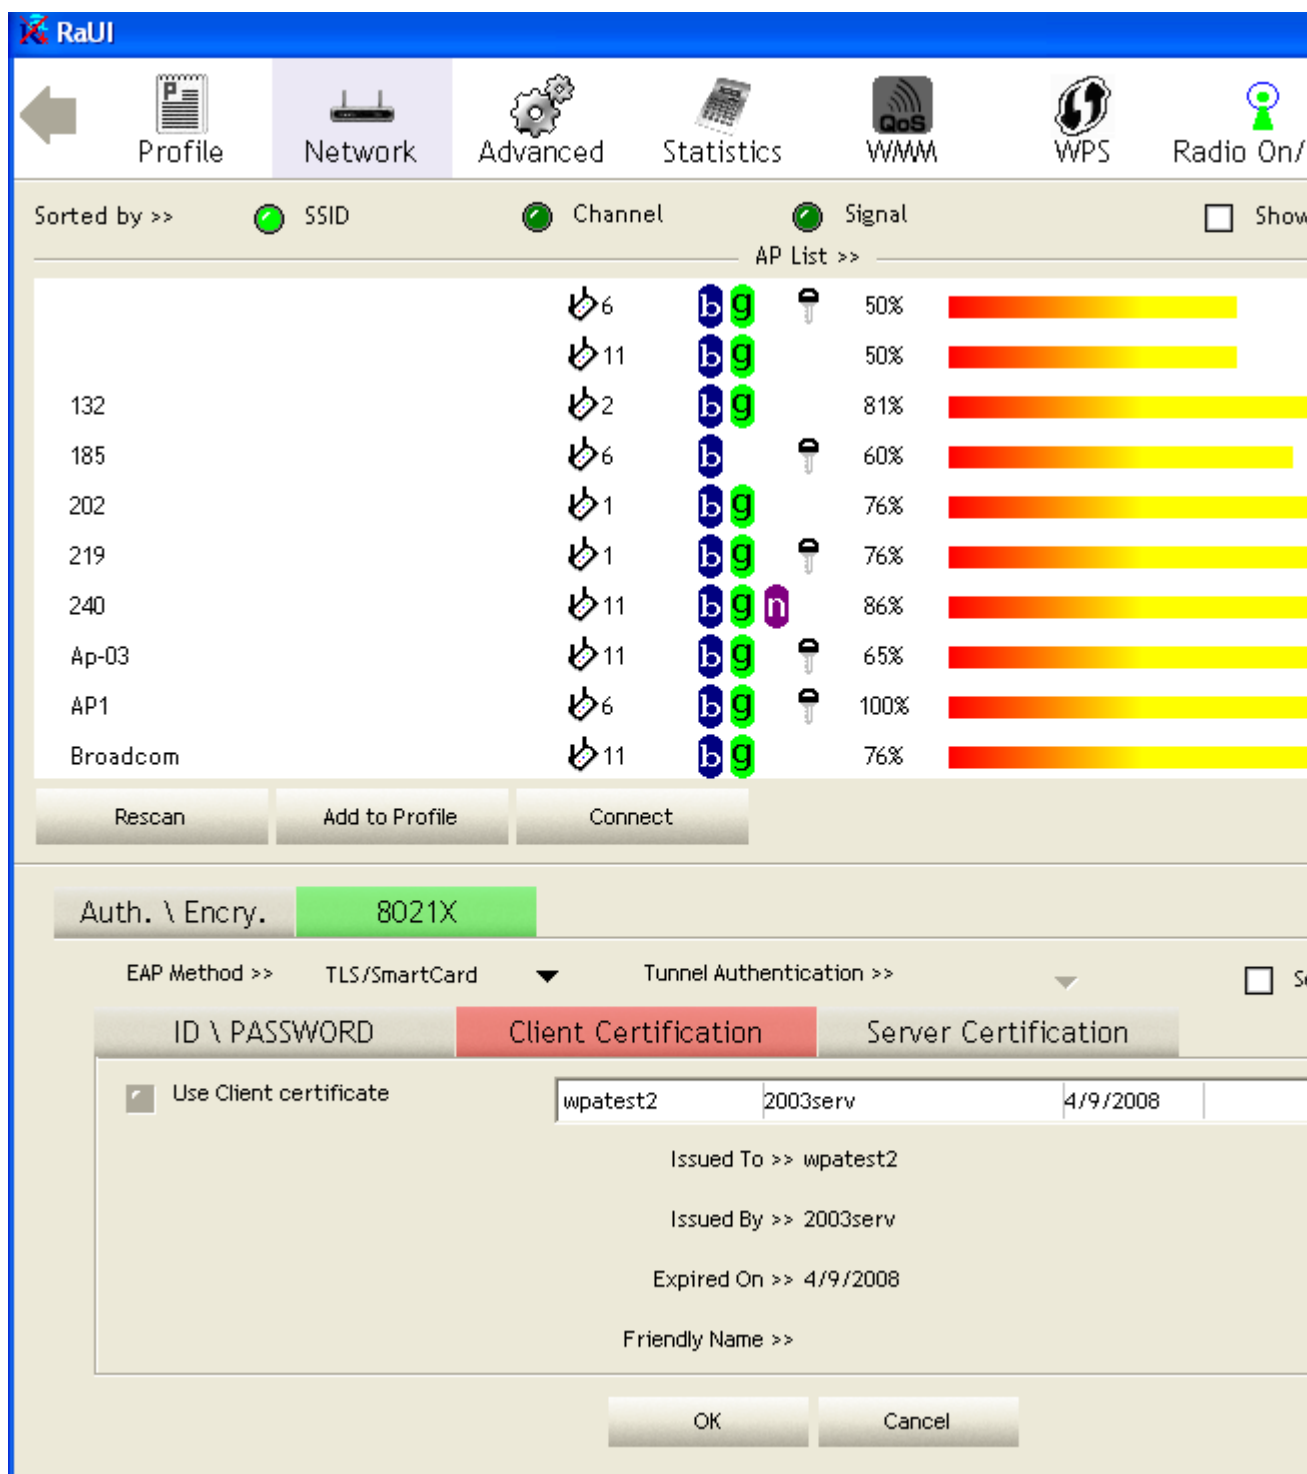

3. Click "OK" button. The result will look like the below figure.

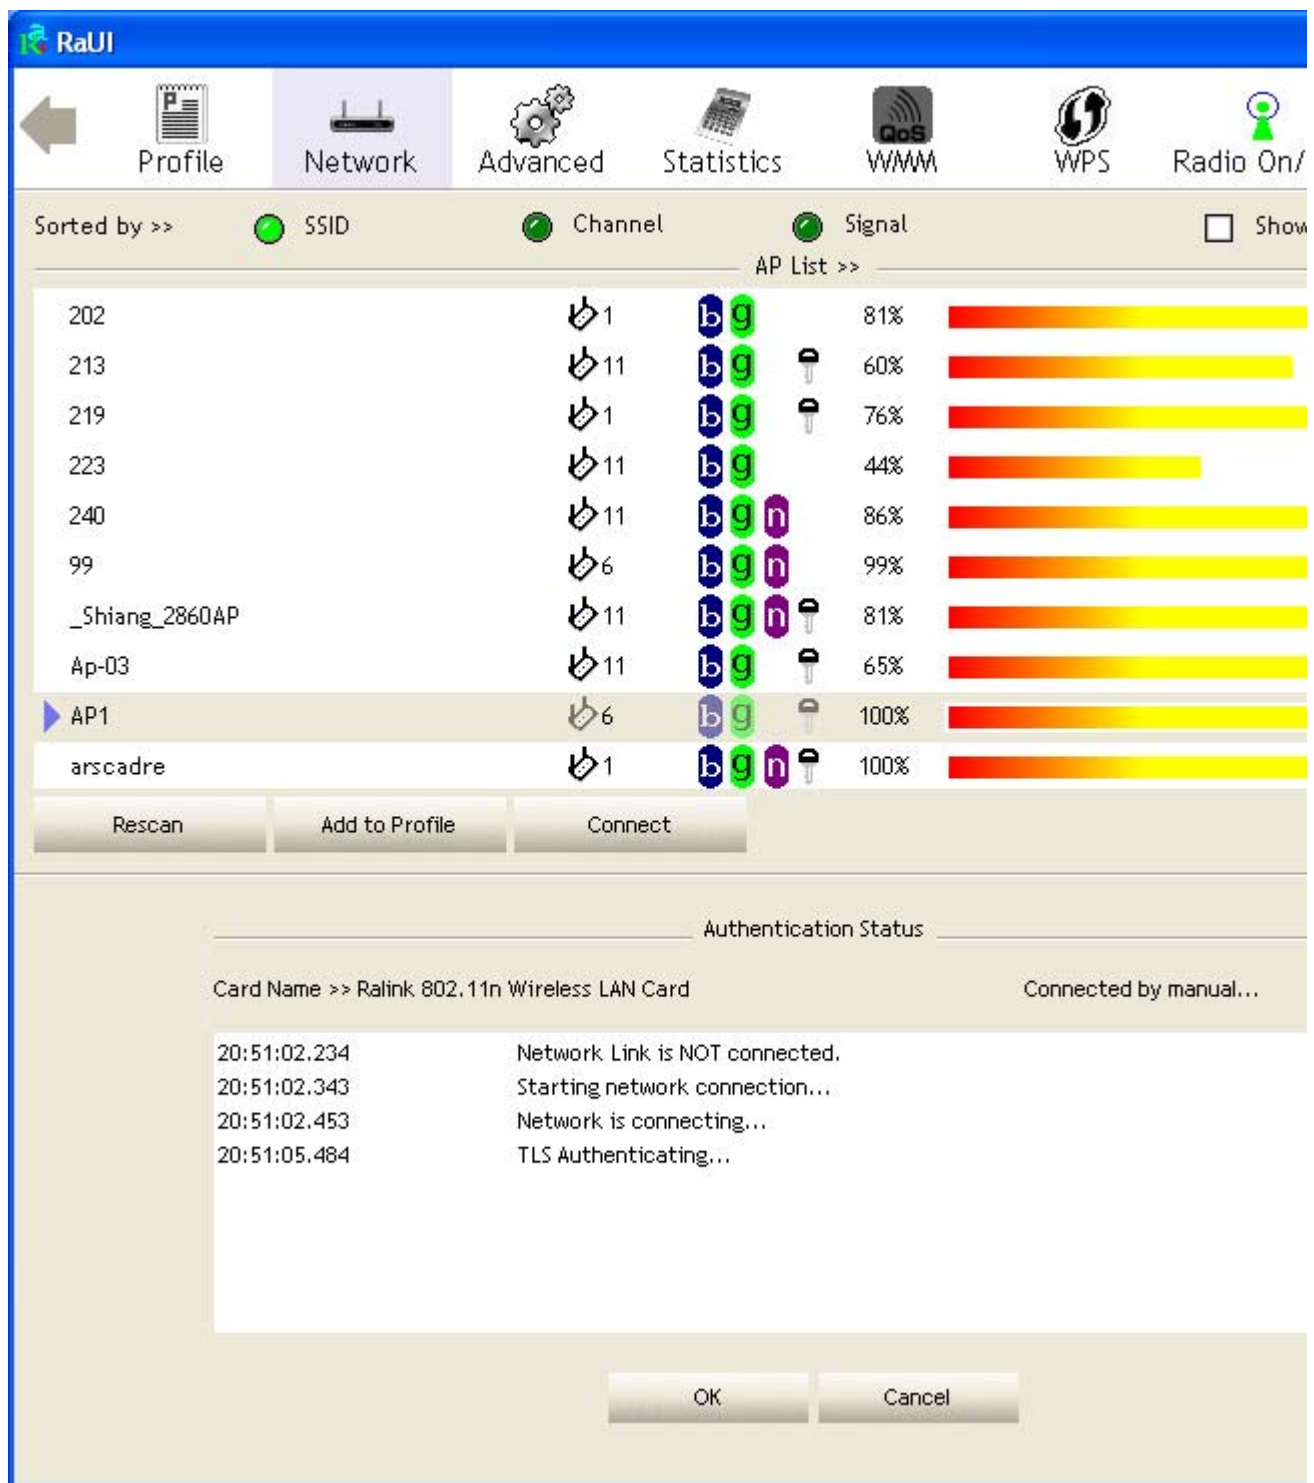

*If you want to disconnect, please click cancel button in Authentication Status function.

*In Profile function, show "Profile Name" option only in adding AP to Profile function.

4. If it connected successfully, the result will look like the below figure.

The screenshot shows the RaUI interface with the 'Network' tab selected. It displays a list of detected Access Points (APs) with columns for AP ID, Channel, Security, Signal, and a visual signal strength bar. The 'AP1' entry is selected, and its detailed configuration is shown below the list.

AP ID	Channel	Security	Signal	Visual Bar
202	1	b g	81%	[Full Bar]
213	11	b g	60%	[Medium Bar]
219	1	b g	76%	[Medium-High Bar]
223	11	b g	44%	[Low Bar]
240	11	b g n	86%	[High Bar]
99	6	b g n	99%	[Full Bar]
_Shiang_2860AP	11	b g n	81%	[Medium-High Bar]
Ap-03	11	b g	65%	[Medium Bar]
AP1	6	b g	100%	[Full Bar]
arcsadre	1	b g n	100%	[Full Bar]

Buttons: Rescan, Add to Profile, Connect

Selected AP Details (AP1):

- Status >> AP1 <--> 00-03-7F-00-D7-A4
- Extra Info >> Link is Up [TxPower:100%]
- Channel >> 6 <--> 2437000 MHz
- Authentication >> WPA
- Encryption >> TKIP+AES
- Network Type >> Infrastructure
- IP Address >> 192.168.5.79
- Sub Mask >> 255.255.255.0
- Default Gateway >> 192.168.5.254
- HT
- BW >> n/a, SNR0 >> n/a, GI >> n/a, MCS >> n/a, SNR1 >> n/a

Link Quality >> 89%

Transmit


- Link Speed >> 54.0 Mbps
- Throughput >> 0.000 Kbps

Receive


- Link Speed >> 54.0 Mbps
- Throughput >> 57.148 Kbps

TTLS :

1. Authentication type chooses TTLS, identity is wpatest2. Protocol chooses CHAP for tunnel authentication, tunnel identity is wpatest2 and tunnel password is test2. Those setting are same as our intended AP's setting.

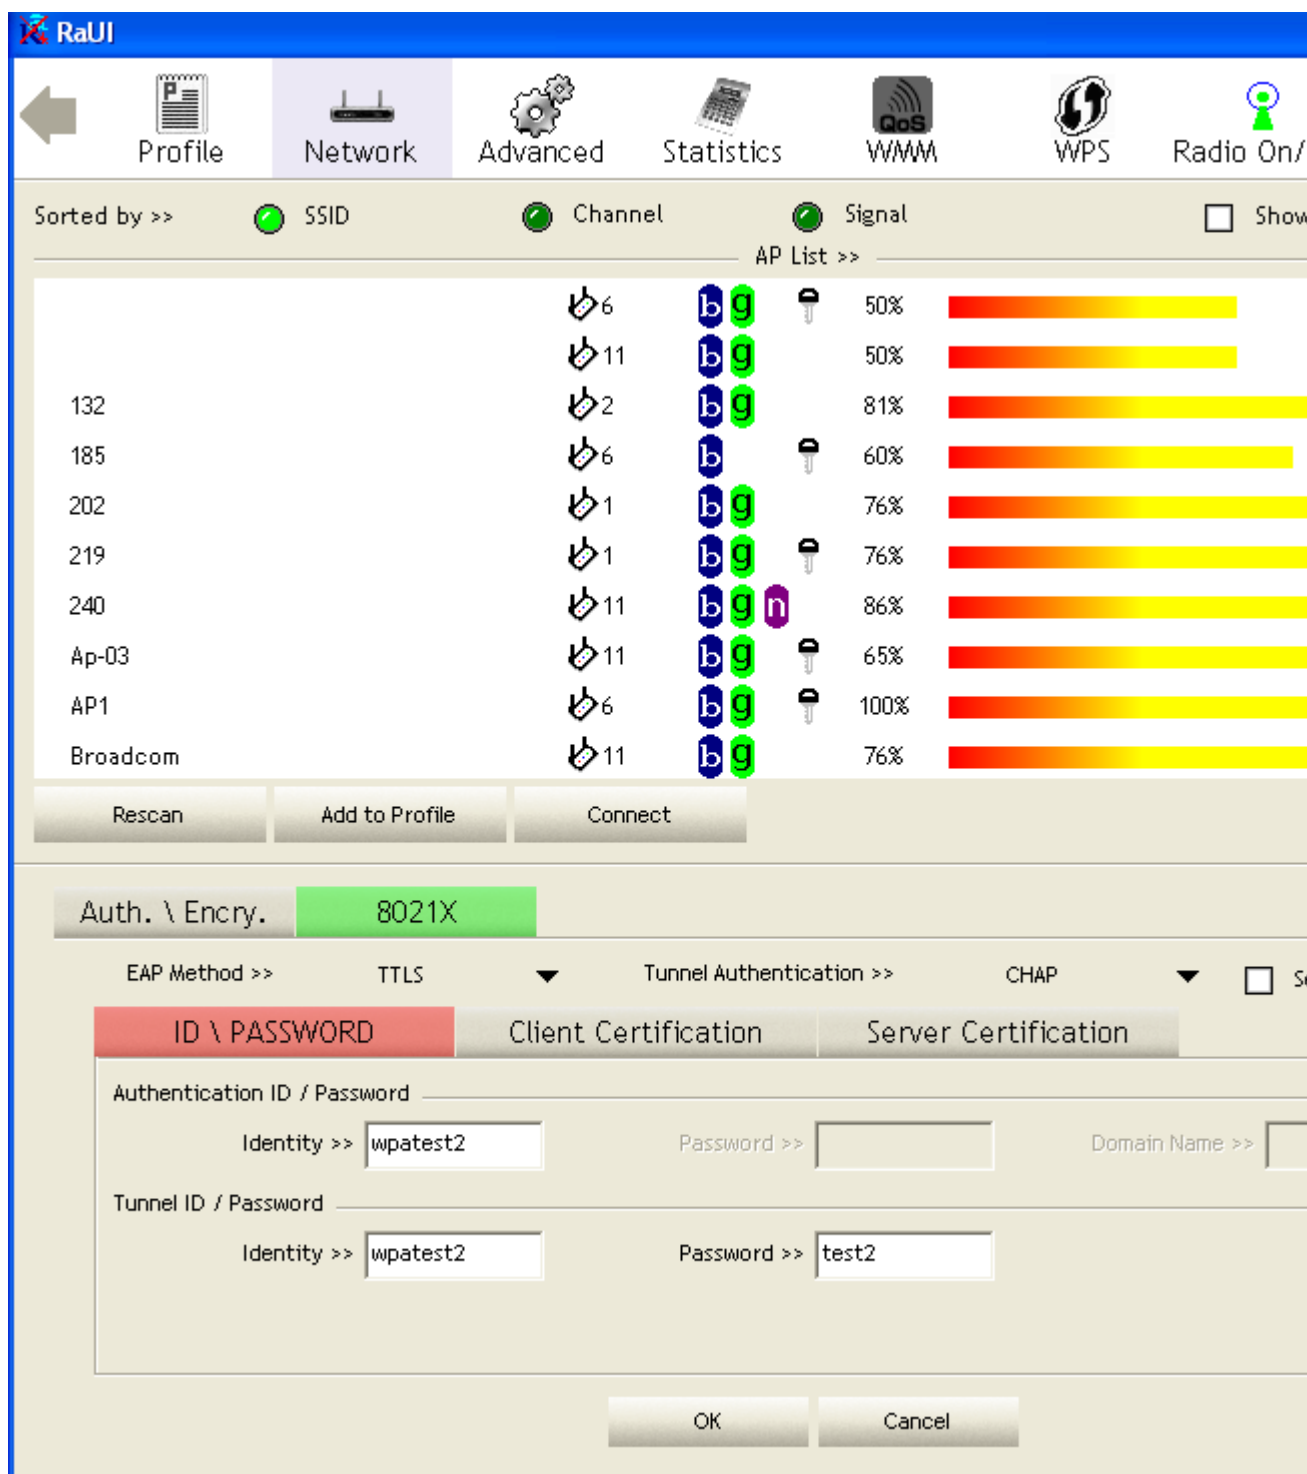


2. Click "OK" button. The result will look like the below figure.

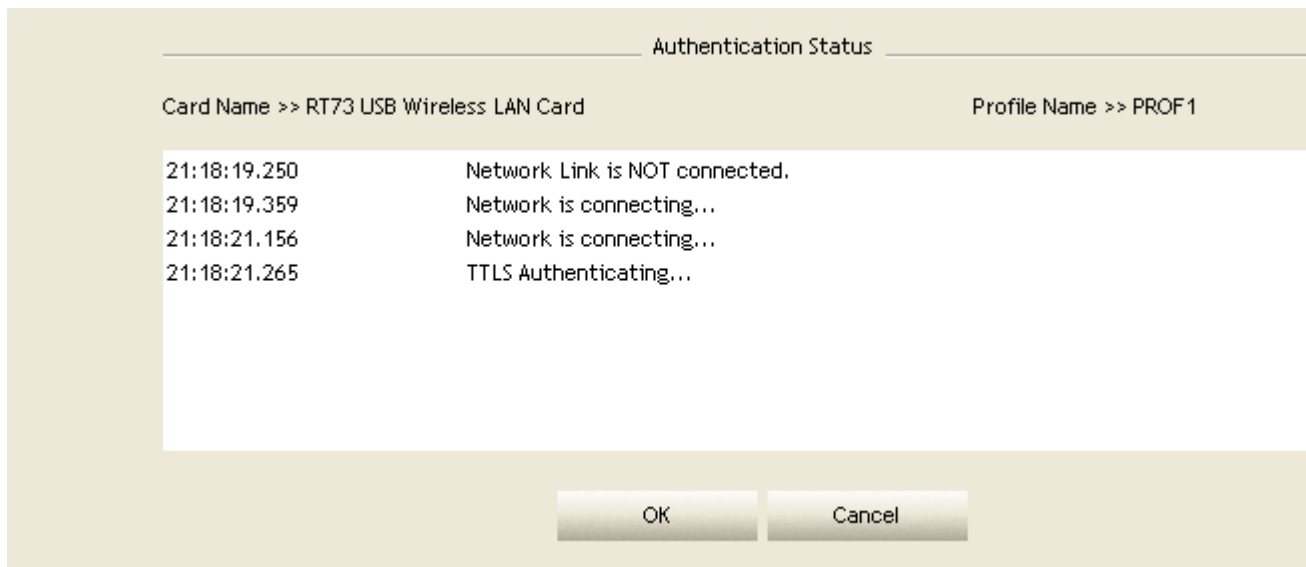


- *If you want to disconnect, please click cancel button in Authentication Status function.
- *In Profile function, show "Profile Name" option only in adding AP to Profile function.

3. If it connected successfully, the result will look like the below figure.

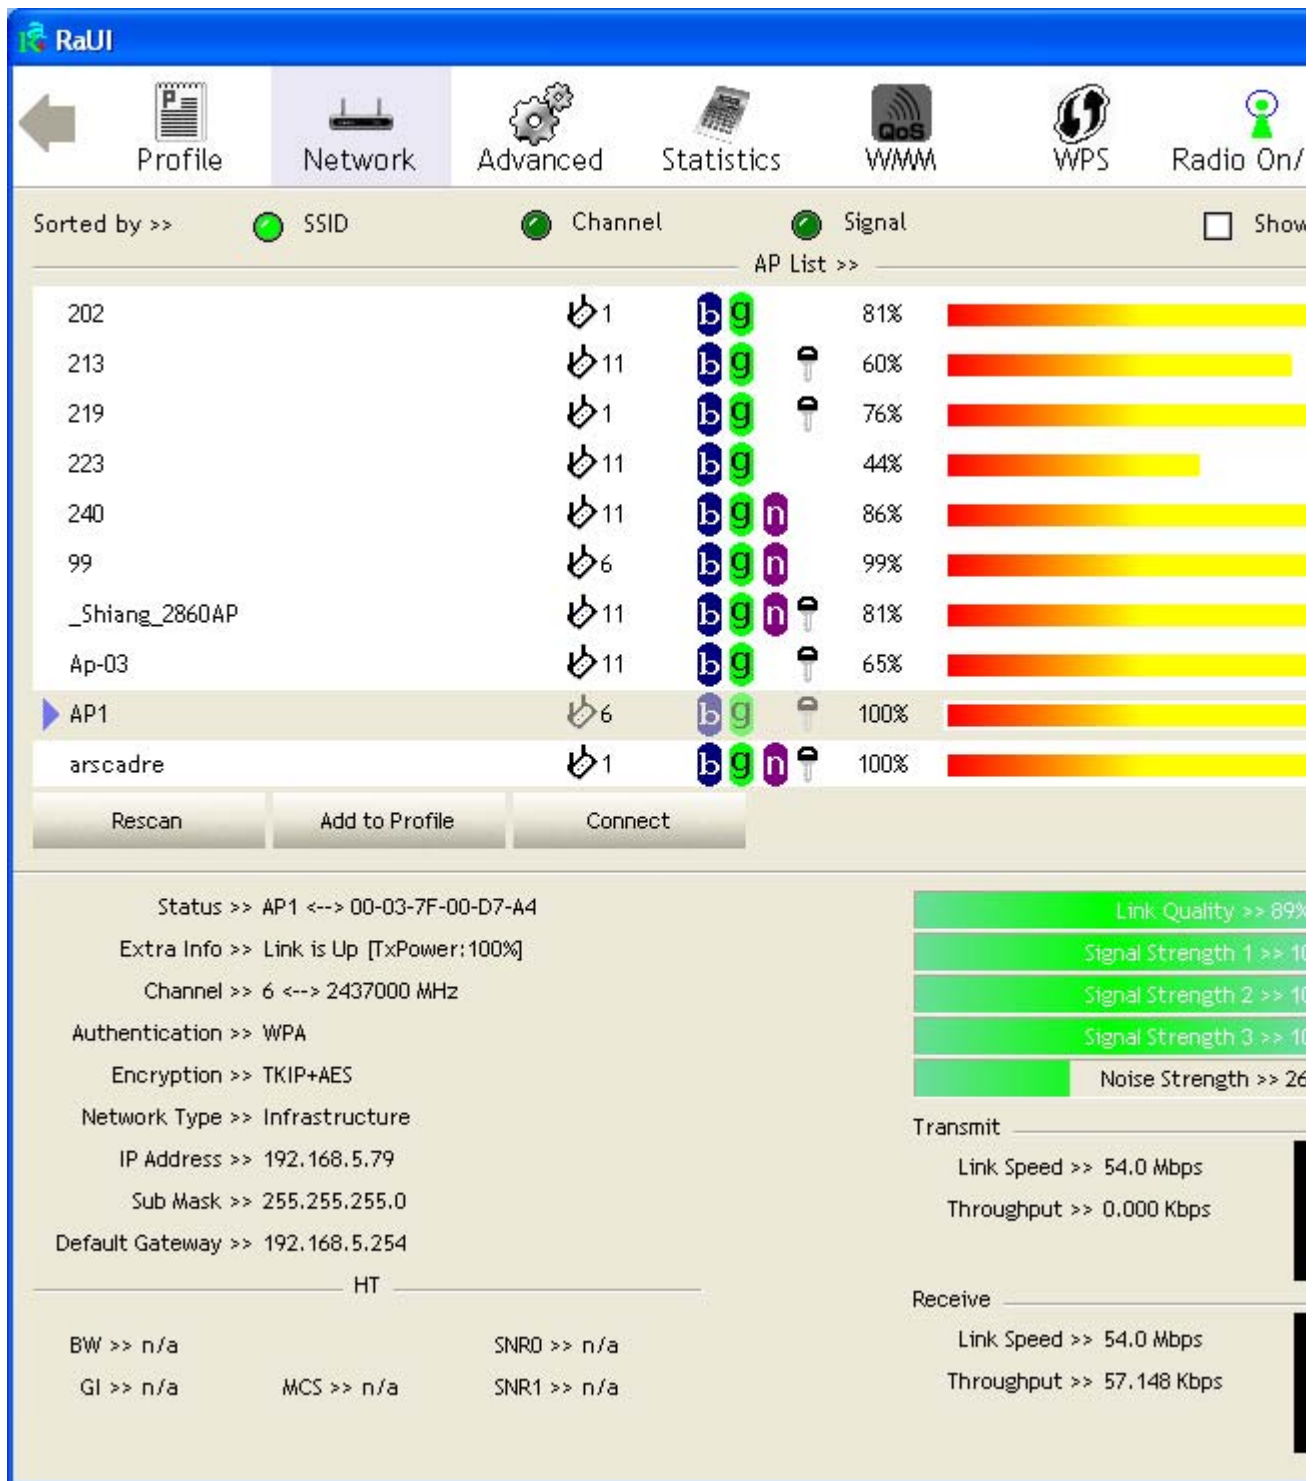


EAP-FAST :

1. Authentication type chooses EAP-FAST, key identity into wpatest2; key domain name into blank space. Tunnel Protocol only supported "Generic Token Card" now, and tunnel identity is wpatest2 and tunnel password is test2. Those setting are same as our intended AP's setting.

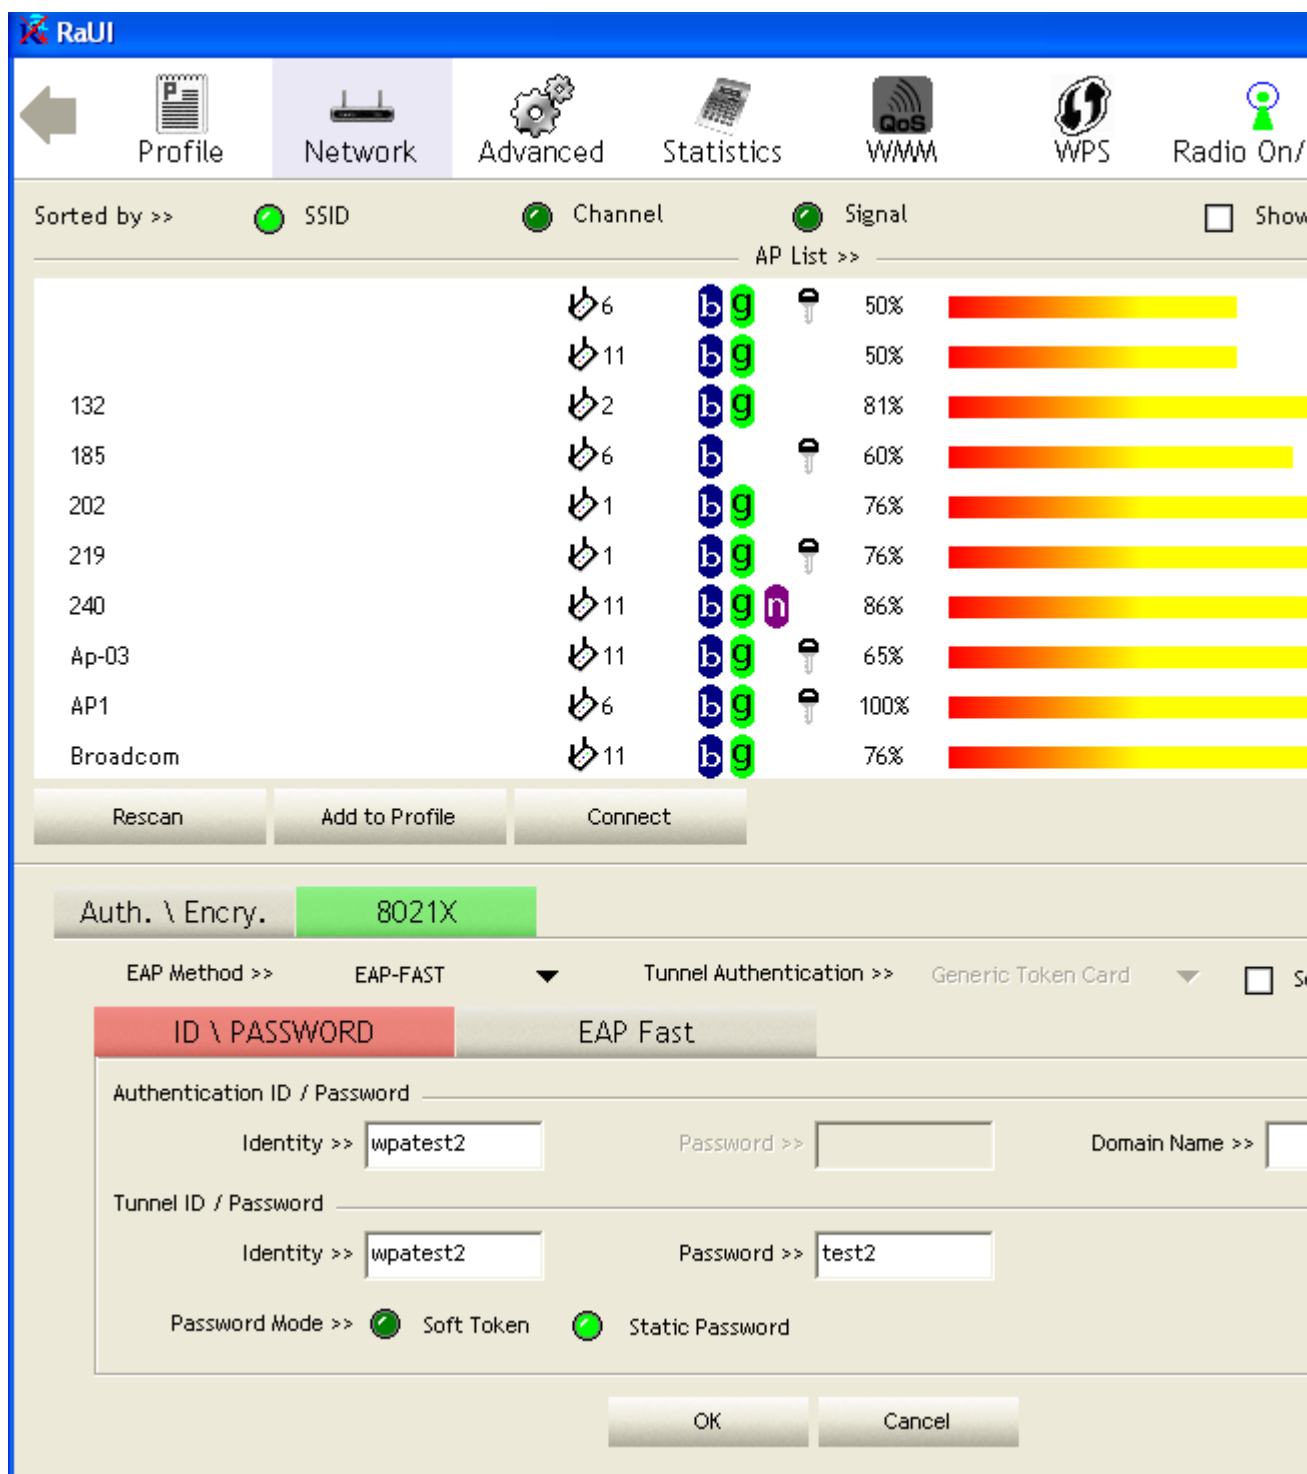

2. Click "OK" button. The result will look like the below figure.

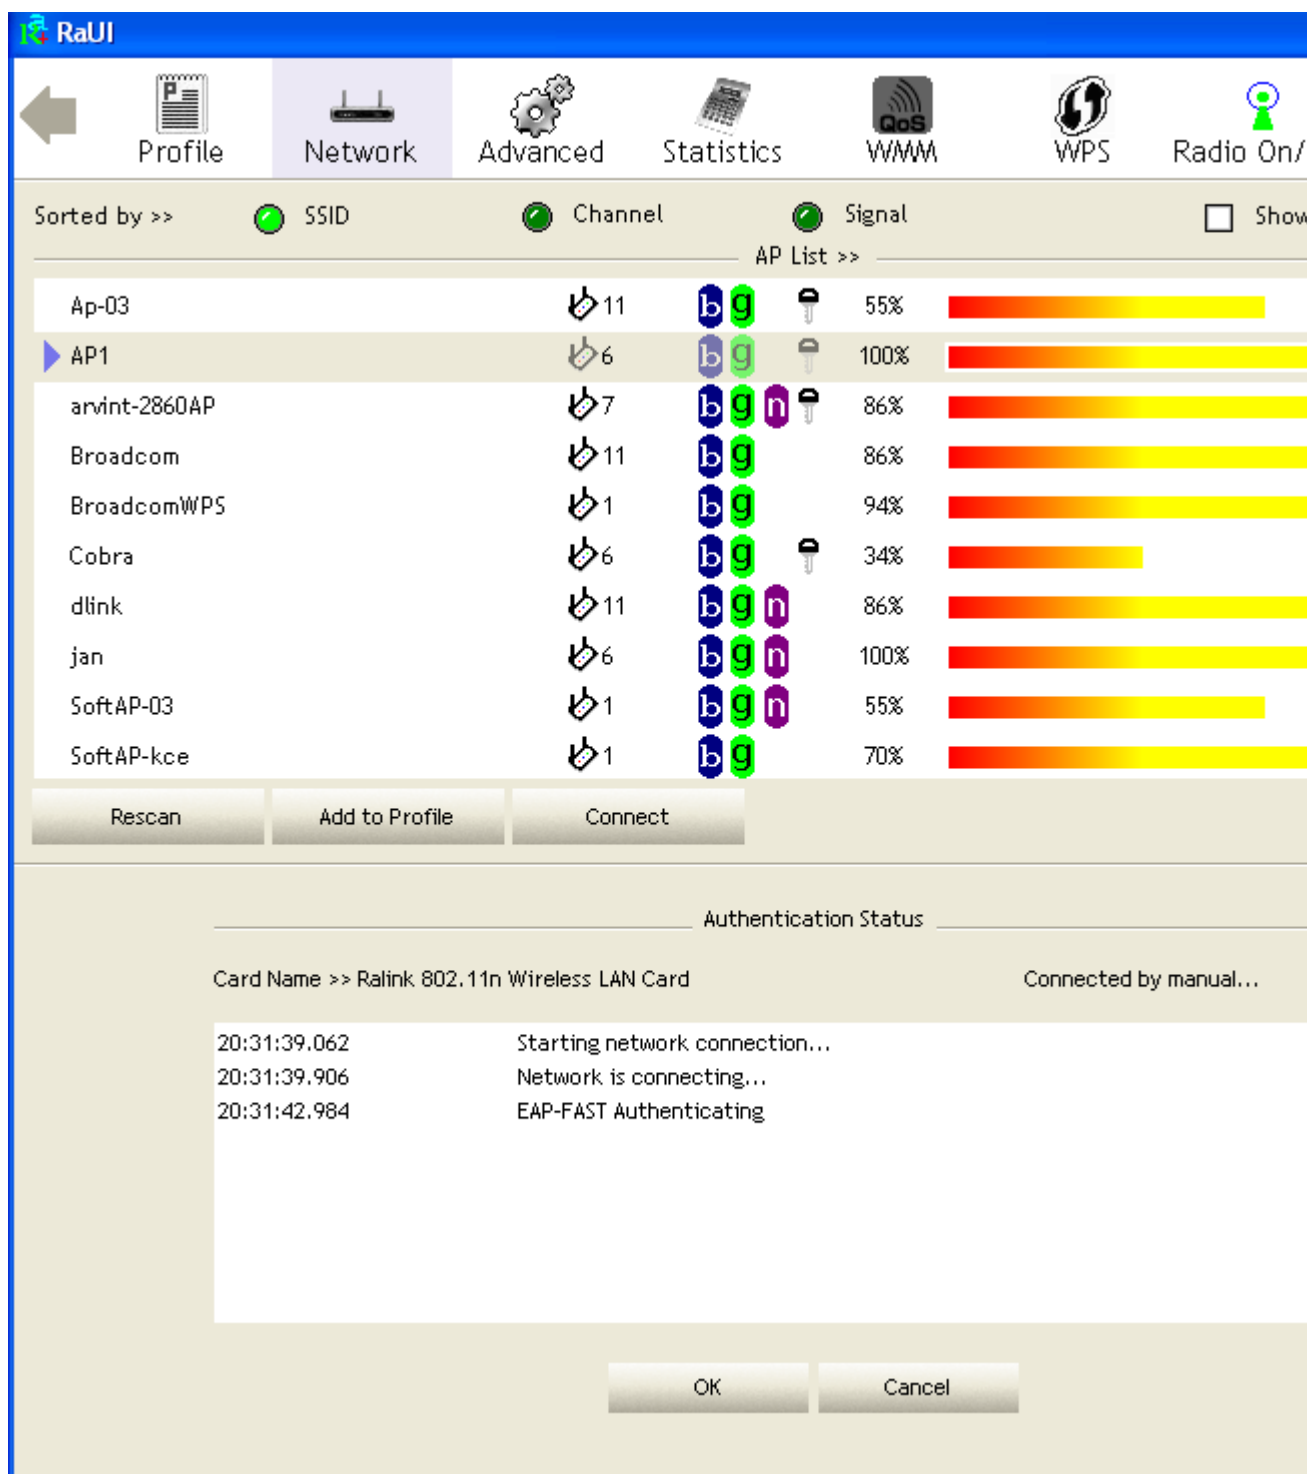

3. If it connected successfully, the result will look like the below figure.

RaUI

Profile Network Advanced Statistics WMM WPS Radio On/Off

Sorted by >> ☒ SSID ☒ Channel ☒ Signal ☐ Show

AP List >>

AP ID	Channel	Mode	Signal	Strength
202	1	b g	81%	
213	11	b g	60%	
219	1	b g	76%	
223	11	b g	44%	
240	11	b g n	86%	
99	6	b g n	99%	
_Shiang_2860AP	11	b g n	81%	
Ap-03	11	b g	65%	
AP1	6	b g	100%	
arscadre	1	b g n	100%	

Rescan Add to Profile Connect

Status >> AP1 <--> 00-03-7F-00-D7-A4

Extra Info >> Link is Up [TxPower:100%]

Channel >> 6 <--> 2437000 MHz

Authentication >> WPA

Encryption >> TKIP+AES

Network Type >> Infrastructure

IP Address >> 192.168.5.79

Sub Mask >> 255.255.255.0

Default Gateway >> 192.168.5.254

HT

BW >> n/a SNR0 >> n/a

GI >> n/a MCS >> n/a SNR1 >> n/a

Link Quality >> 89%

Signal Strength 1 >> 10

Signal Strength 2 >> 10

Signal Strength 3 >> 10

Noise Strength >> 26

Transmit

Link Speed >> 54.0 Mbps

Throughput >> 0.000 Kbps

Receive

Link Speed >> 54.0 Mbps

Throughput >> 57.148 Kbps

*If you want to disconnect, please click cancel button in Authentication Status function.

*In Profile function, show "Profile Name" option only in adding AP to Profile function.

Country Channel List

Country channel list, channel classification and range.

Classification	Range
0:GFCC	CH1 ~ CH11
1:GIC (Canada)	CH1 ~ CH11
2:GETSI	CH1 ~ CH13
3:GSPAIN	CH10 ~ CH11
4:GFRANCE	CH10 ~ CH13
5:GMKK	CH14 ~ CH14
6:GMKKI (TELEC)	CH1 ~ CH14
7:GISRAEL	CH3 ~ CH9

Country Name	Classification	Range
Argentina	0	CH1~11
Australia	1	CH1~13
Austria	1	CH1~13
Bahrain	1	CH1~13
Belarus	1	CH1~13
Belgium	1	CH1~13
Bolivia	1	CH1~13
Brazil	0	CH1~11
Bulgaria	1	CH1~13
Canada	0	CH1~11
Chile	1	CH1~13
China	1	CH1~13
Colombia	0	CH1~11
Costa Rica	1	CH1~13
Croatia	1	CH1~13
Cyprus	1	CH1~13
Czech Republic	1	CH1~13
Denmark	1	CH1~13
Ecuador	1	CH1~13
Egypt	1	CH1~13
Estonia	1	CH1~13
Finland	1	CH1~13
France	3	CH10~13
France2	1	CH1~13
Germany	1	CH1~13
Greece	1	CH1~13
Hong Kong	1	CH1~13

Hungary	1	CH1~13
Iceland	1	CH1~13
India	1	CH1~13
Indonesia	1	CH1~13
Ireland	1	CH1~13
Israel	6	CH3~9
Italy	1	CH1~13
Japan	5	CH1~14
Japan2	4	CH14~14
Japan3	1	CH1~13
Jordan	3	CH10~13
Kuwait	1	CH1~13
Latvia	1	CH1~13
Lebanon	1	CH1~13
Latvia	1	CH1~13
Lebanon	1	CH1~13
Liechtenstein	1	CH1~13
Lithuania	1	CH1~13
Luxembourg	1	CH1~13
Macedonia	1	CH1~13
Malaysia	1	CH1~13
Mexico	0	CH1~11
Morocco	1	CH1~13
Netherlands	1	CH1~13
New Zealand	1	CH1~13
Nigeria	1	CH1~13
Norway	1	CH1~13
Panama	1	CH1~13
Paraguay	1	CH1~13
Peru	1	CH1~13
Philippines	1	CH1~13
Poland	1	CH1~13
Portugal	1	CH1~13
Puerto Rico	1	CH1~13
Romania	1	CH1~13
Russia	1	CH1~13
Saudi Arabia	1	CH1~13
Singapore	1	CH1~13
Slovakia	1	CH1~13
Slovenia	1	CH1~13
South Africa	1	CH1~13
South Korea	1	CH1~13
Spain	2	CH10~11
Sweden	1	CH1~13

Switzerland	1	CH1~13
Taiwan	0	CH1~11
Thailand	1	CH1~13
Turkey	1	CH1~13
United Arab Emirates	1	CH1~13
United Kingdom	1	CH1~13
United States of America	0	CH1~11
Uruguay	1	CH1~13
Venezuela	1	CH1~13
Yugoslavia	0	CH1~11

Acknowledgements

The above setting is test platform by RaLink technology corp. User can set the function in accordance with A.P.

Acknowledgements:

"This product includes software developed by MDC and its licensors. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>). This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).